

SHARP 150

CE IP66 CLII/I **Installation**

Surface mounted projectors for outdoor installation.

Technical description

Body, front frame and rear closure are made of die-cast aluminum, painted with polyester powder.
 Front closure made of extra-clear tempered glass.
 Bracket made of laser cutted stainless steel, finished as the body.
 High quality power LED.

Electrical features

Integrated power supply.
 Class I device.

Optical features

The integrated grid together with the deep recessed LED board provide a very low glaring beam

**Source type**

Luminaire wattage

Colour temperature

CRI

Beam

Driver

Input

Protection class

IP rating

Weight

Dimension

Power LED

17 W - 26W

2700K - 3000K - 4000K

80 - on request 90

13°- 25°- 50°- 11X55°

Integrated

220-240V 50/60Hz

CLII - On request CLII


IP66

1.6 kg

w 160 x l100 x h 134

SHARP 150 17W

CE IP66 CLII/I 

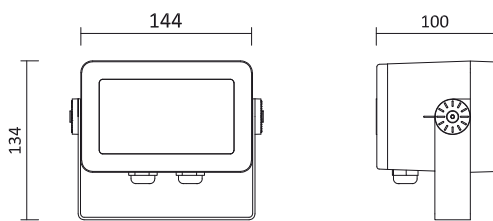

Product codes

Code	W	Optic	Lm	K	CRI
ASHARRB31Y	17	13°	1385	2700	80
ASHARRB31W	17	13°	1470	3000	80
ASHARRB31N	17	13°	1580	4000	80
ASHARRB32Y	17	25°	1370	2700	80
ASHARRB32W	17	25°	1455	3000	80
ASHARRB32N	17	25°	1565	4000	80
ASHARRB33Y	17	50°	1315	2700	80
ASHARRB33W	17	50°	1365	3000	80
ASHARRB33N	17	50°	1465	4000	80
ASHARRB34Y	17	11X55°	1210	2700	80
ASHARRB34W	17	11X55°	1285	3000	80
ASHARRB34N	17	11X55°	1385	4000	80


+ Finishing codes

Code	Description
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted


+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA


13° 17W

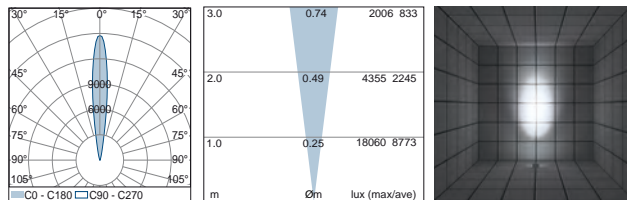


25° 17W

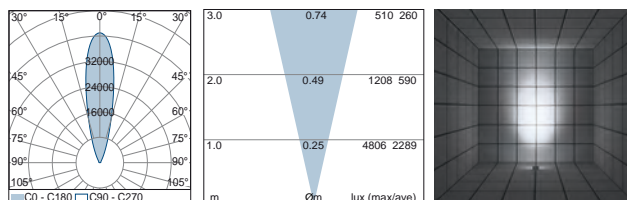

50° 17W

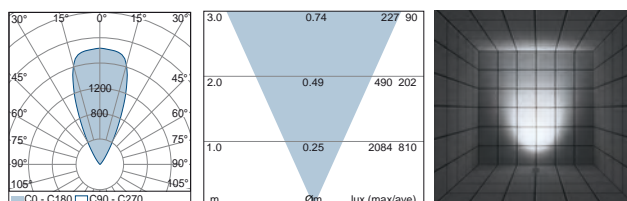


11X55° 17W

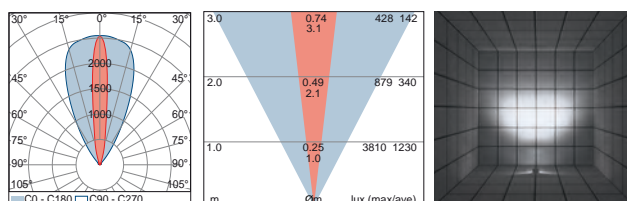

SHARP 150 26W

CE IP66 CLI/II 

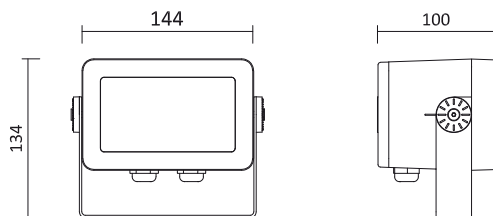

Product codes

Code	W	Optic	Lm	K	CRI
ASHARRB41Y	26	13°	1915	2700	80
ASHARRB41W	26	13°	2025	3000	80
ASHARRB41N	26	13°	2180	4000	80
ASHARRB42Y	26	25°	1890	2700	80
ASHARRB42W	26	25°	2005	3000	80
ASHARRB42N	26	25°	2155	4000	80
ASHARRB43Y	26	50°	1775	2700	80
ASHARRB43W	26	50°	1880	3000	80
ASHARRB43N	26	50°	2025	4000	80
ASHARRB44Y	26	11X55°	1675	2700	80
ASHARRB44W	26	11X55°	1770	3000	80
ASHARRB44N	26	11X55°	1905	4000	80


+ Finishing codes

Code	Description
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted


+ Power supply codes

Code	Power supply type
ST01050	Standard - 1050 mA
DI01050	DIM1-10 - 1050 mA
DA01050	DIM DALI - 1050 mA


13° 26W

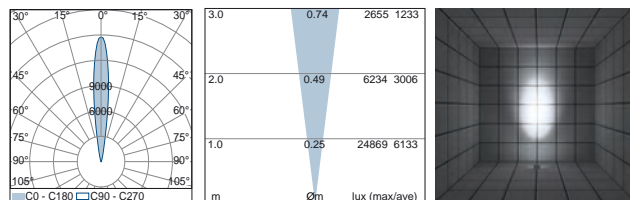


25° 26W

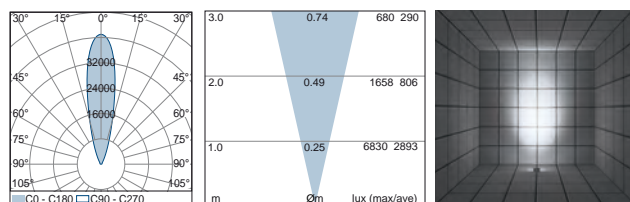


50° 26W

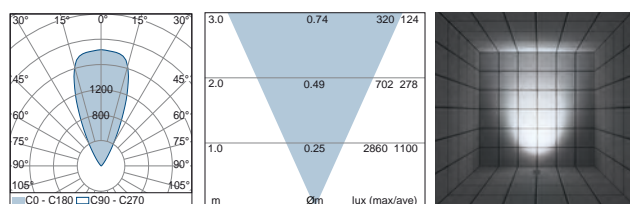

11X55° 26W

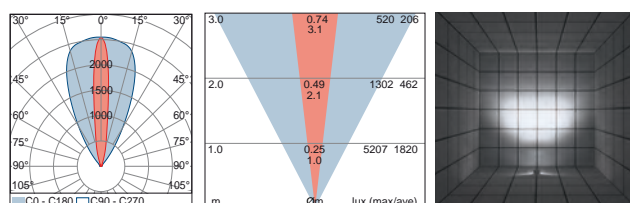

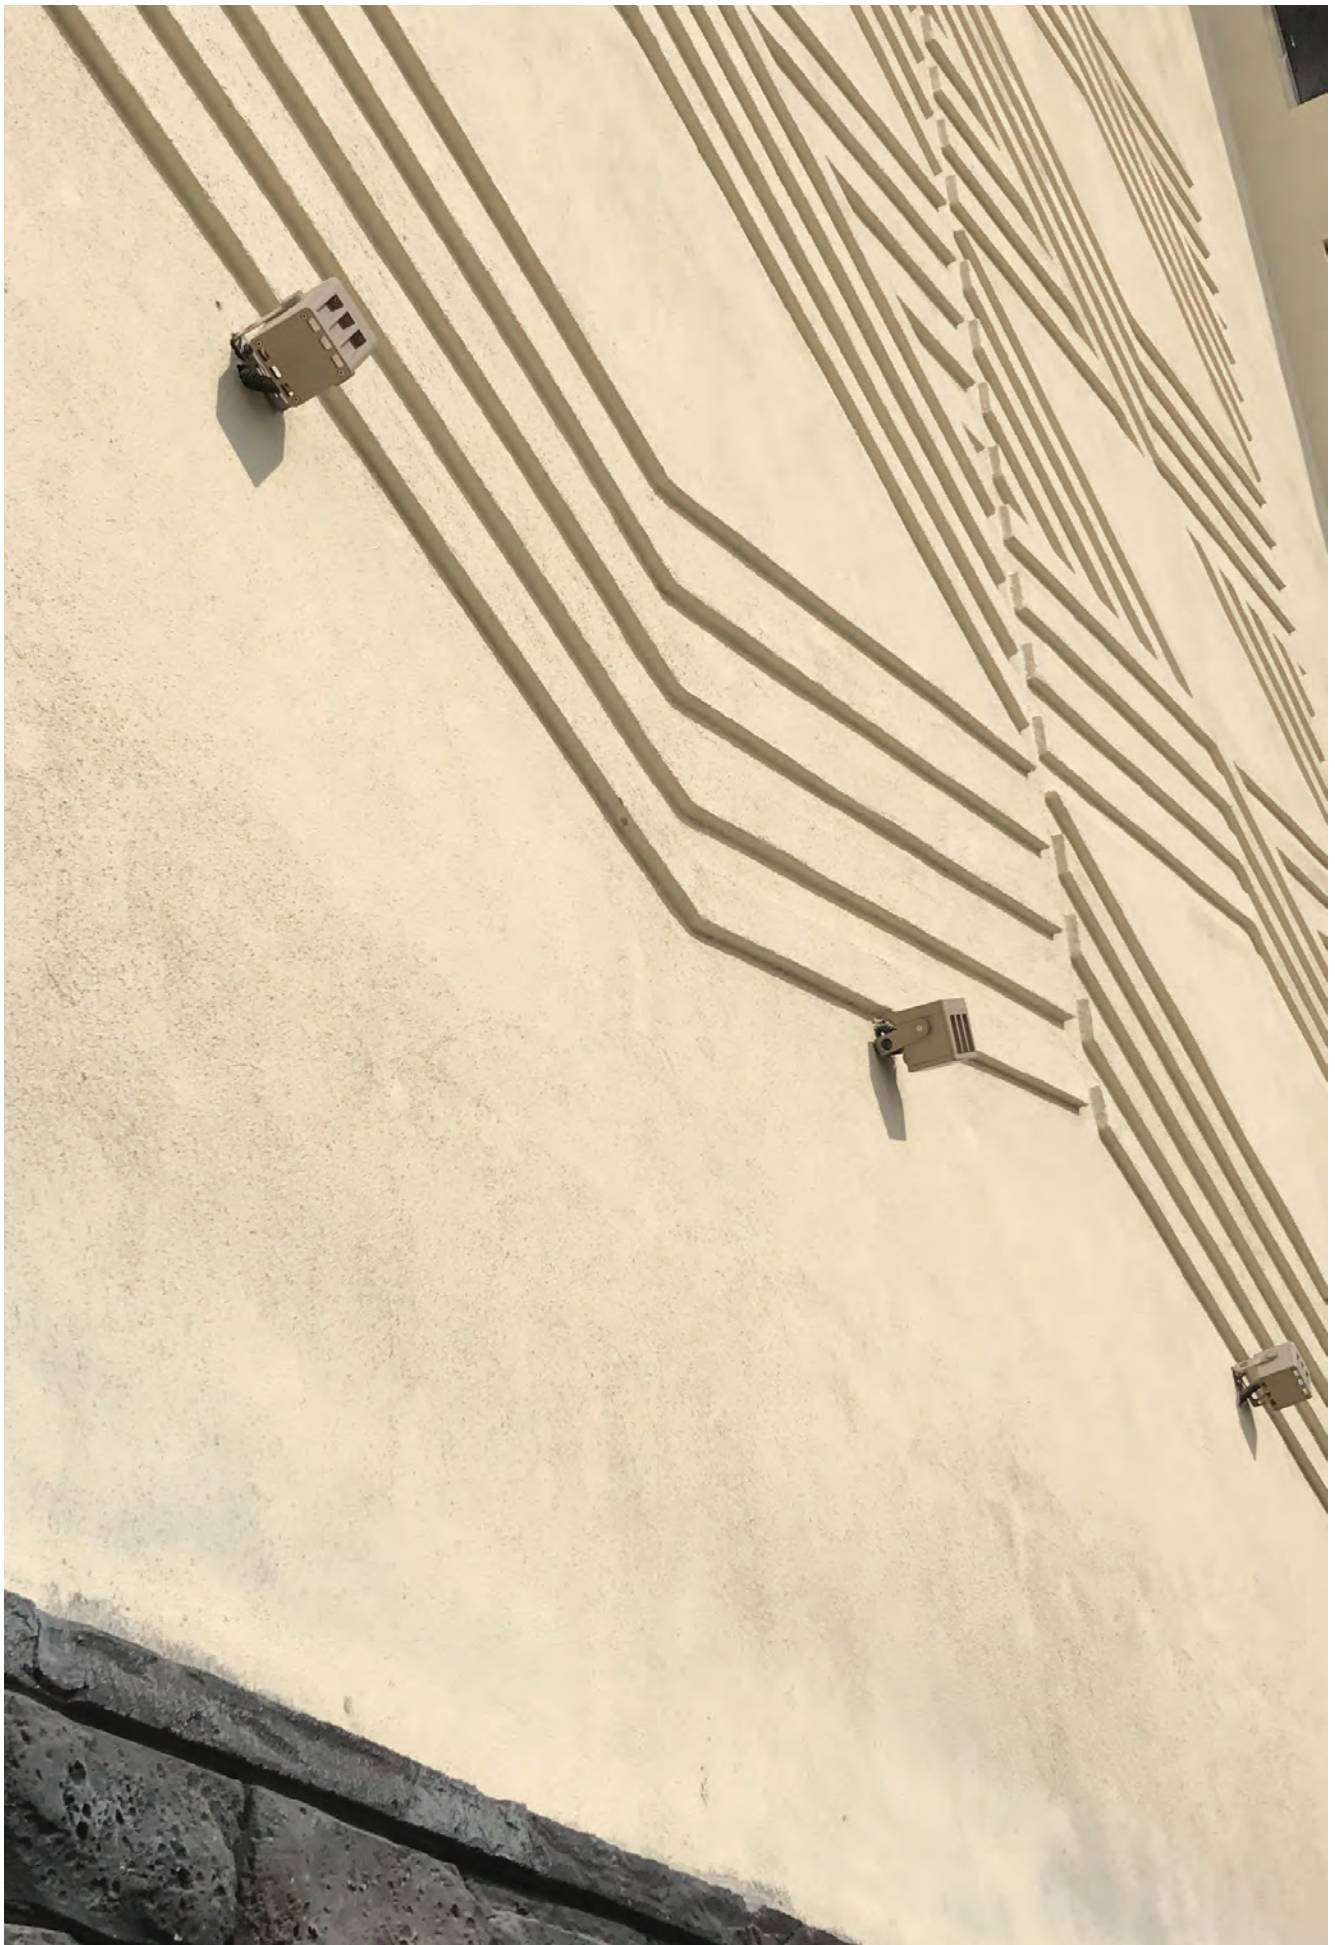

SHARP 100 / Lapita Hotel, Dubai

Tassoni & Pesenti