


P100 D

CE IP66 CLII/I **Installation**

Surface mounted projectors for indoor and outdoor installation.

Technical description

Body made of aluminum, black or natural anodized or painted with polyester powder.
 Front closure made of extra clear tempered glass.
 Bracket made of laser cutted stainless steel, finished as the body.
 High quality COB LED.

Electrical features

Integrated power supply.
 Class I device.

Source type

COB LED

Luminaire wattage

15W - 21.5W

Colour temperature

2700 K - 3000 K - 4000 K

CRI

80 - on request 90

Beam

25° - 38° - 90°

Driver

Integrated

Input

220-240V 50/60Hz

Protection class

CLII - On request CLII

IP rating

IP66

Weight


2 kg

Dimension

Ø 100 x h 152 x l 195 x

P100 D 15W

CE IP66 CLII/I

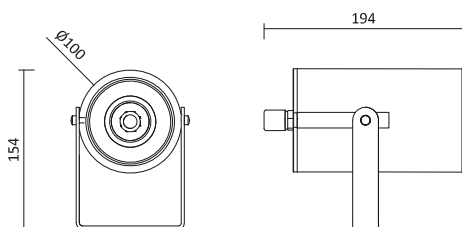

Product codes

Code	W	Optic	Lm	K	CRI
AP100DSS11Y	15	25°	1920	2700	80
AP100DSS11W	15	25°	2010	3000	80
AP100DSS11N	15	25°	2075	4000	80
AP100DSS12Y	15	38°	1920	2700	80
AP100DSS12W	15	38°	2010	3000	80
AP100DSS12N	15	38°	2075	4000	80
AP100DSS14Y	15	90°	1920	2700	80
AP100DSS14W	15	90°	2010	3000	80
AP100DSS14N	15	90°	2075	4000	80


+ Finishing codes

Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted


+ Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


25° 15W

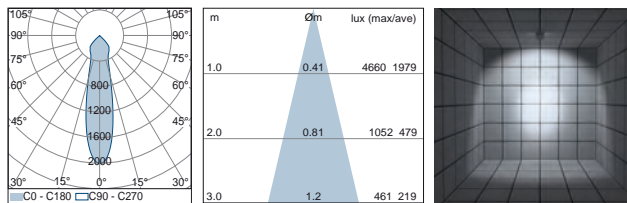


38° 15W

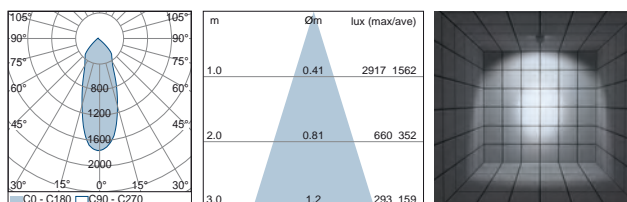

90° 15W

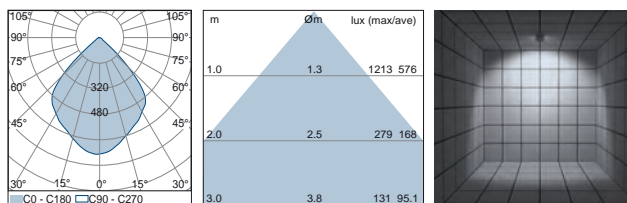


P100 D 21.5W



Product codes


Code	W	Optic	Lm	K	CRI
AP100DSS21Y	21.5	25°	2610	2700	80
AP100DSS21W	21.5	25°	2730	3000	80
AP100DSS21N	21.5	25°	2815	4000	80
AP100DSS22Y	21.5	38°	2610	2700	80
AP100DSS22W	21.5	38°	2730	3000	80
AP100DSS22N	21.5	38°	2815	4000	80
AP100DSS24Y	21.5	90°	2615	2700	80
AP100DSS24W	21.5	90°	2730	3000	80
AP100DSS24N	21.5	90°	2820	4000	80

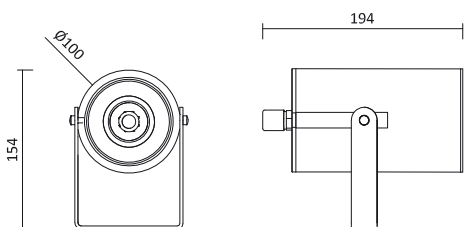


+ Finishing codes

Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
GP	Grey RAL9006 powder painted
SP	Sable noir powder painted
WP	White powder painted


25° 21.5W

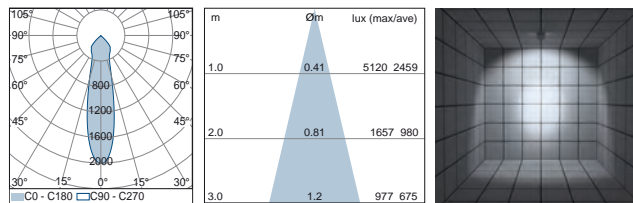

38° 21.5W

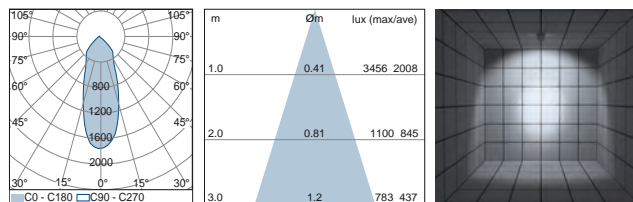

90° 21.5W

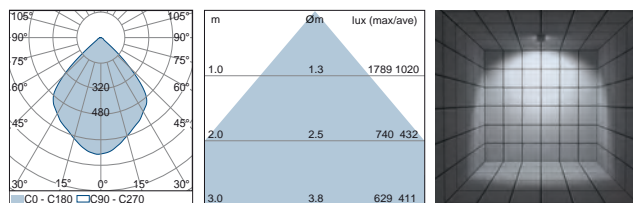

+ Power supply codes

Code	Power Supply Type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA



P100D / Hotel, Dubai

Tassoni & Pesenti