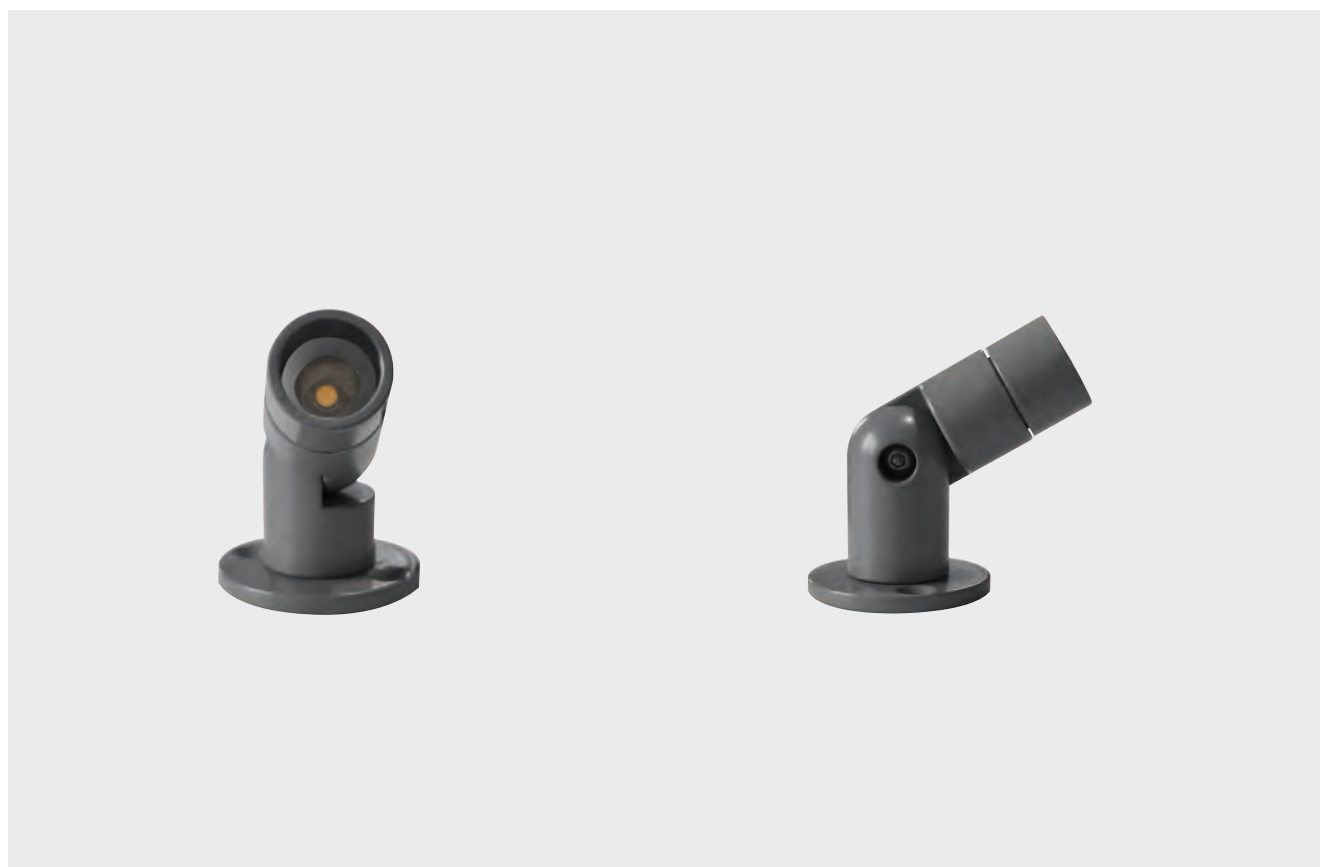


P17

CE IP66 CLIII 

Installation

Surface mounted projector, for indoor and outdoor installation characterized by a very small dimension and a double rotation around the Z and X axes.

Technical description

Body made of machined aluminum, natural or black anodized; painted with polyester powder also available. Front closure made of clear borosilicate glass. High quality power LED.

Electrical features

Remote power supply not included.
Class III device.

Source type

Luminaire wattage

Colour temperature

CRI

Beam

Driver

Input current

Protection class

IP rating

Weight

Dimension

Power LED

1.1W

2700K - 3000K - 4000K

80 - on request 90

26° - 40°

Remoted

Max 350mA

CLIII

IP66

0,05 kg

Ø 17 x h 55

AP017S01 - Track adaptor

All accessories available.
To be requested.



P17 1.1W

CE IP66 CLIII 



Product codes


Code	W	Optic	Lm	K	CRI
AP017BA11Y	1.1	26°	90	2700	80
AP017BA11W	1.1	26°	95	3000	80
AP017BA11N	1.1	26°	100	4000	80
AP017BA12Y	1.1	40°	80	2700	80
AP017BA12W	1.1	40°	85	3000	80
AP017BA12N	1.1	40°	90	4000	80

+ Finishing Codes


Code	Description
NA	Natural anodized aluminum
BA	Black anodized aluminum
SP	Sable noir powder painted
WP	White powder painted

+ Power supply codes

Code	Power supply type
ST0350	Standard - 350 mA
DI0350	DIM1-10 - 350 mA
DA0350	DIM DALI - 350 mA

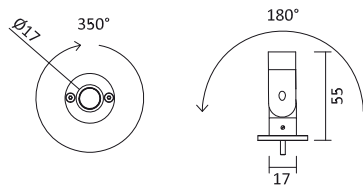

26° 1,1W

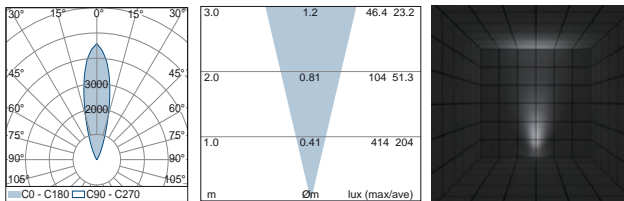

40° 1,1W

