APAKURA

C€ IP20/54 CLI ▼



Apakura 3 bronze finish



Apakura 3 white finish

APAKURA 3

C€ IP20/54 CLI ▼

Installation

Ceiling suspended chandelier for indoor and under canopy installation.

Technical description

Main body made up of 2 or 3 thermoformed acrylic sheets shaped as stretched cones and aligned concentrically with a stainless steel pipe.

Thermoformed cones are painted with a special bronze colour used in the automotive field or in white; other colour upon request are available.

Bottom small aluminium cone for indirect lighting.

Top external aesthetic ring made of a laser cutted steel sheet and painted with polyester powder.

Hanging system with a rigid stainless steel rod or a suitable chain.

Electrical features

Apakura 3: 2nos rings with mid power LED, 130W. Apakura 2: 1no rings with mid power LED, 40W. Both are equipped with a 7W LED module, in the pending

Power supply integrated or remotized for an easier maintenace.

Source type

Luminaire wattage Apakura 3 Luminaire wattage Apakura 2

Colour temperature

CRI Beam

Driver Input

Protection class

IP rating

Dimensions Apakura 3 Dimensions Apakura 2

Suspension rod Suspension chain Mid-power LED + Power LED

130W + 7W 40W + 7W 2700K


80 Diffuse

Remoted/Integrated 220-240V 50/60Hz

CLI IP20/54

Ø 2000 x h 720 Ø 1285 x h 500 Max 3000


Max 3000 Max 6000

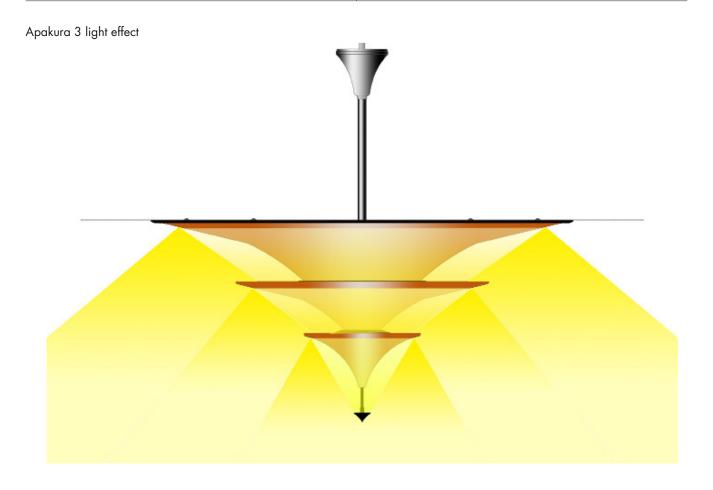




Apakura 3 / Hotel, Dubai

APAKURA 3



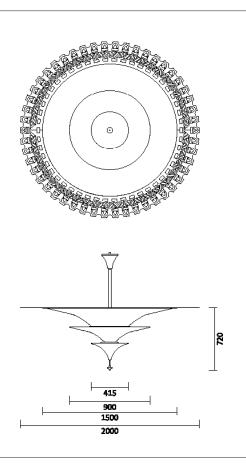



| Product code | es | | | |
|--------------|-------|---------|------|-----|
| Code | W | Optic | K | CRI |
| CAPAKU311Y | 130+7 | Diffuse | 2700 | 80 |

| + Finishing codes | |
|-------------------|-----------------------|
| Code | Description |
| WP | Bronze powder painted |
| BP | White powder painted |
| СР | Other custom colour |
| | |

| + Power supply codes | |
|----------------------|-------------------|
| Code | Power Supply Type |
| ST0024 | Standard - 24 V |
| DI0024 | DIM1-10 - 24 V |
| DA0024 | DIM DALI - 24 V |

APAKURA 2



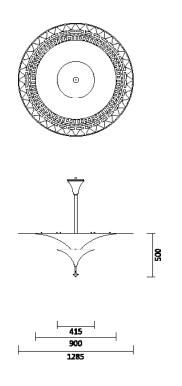

| Product code | es | | | |
|--------------|------|---------|------|-----|
| Code | W | Optic | K | CRI |
| APAKU211Y | 40+7 | Diffuse | 2700 | 80 |
| | | | | |

| + Finishing codes | |
|-------------------|-----------------------|
| Code | Description |
| WP | Bronze powder painted |
| BP | White powder painted |
| СР | Other custom colour |
| | |

| + Power supply codes | |
|----------------------|-------------------|
| Code | Power Supply Type |
| ST0024 | Standard - 24 V |
| DI0024 | DIM1-10 - 24 V |
| DA0024 | DIM DALI - 24 V |

JAN - craftmen for lighting