


STELO

CE IP65 CLIII 



STELO

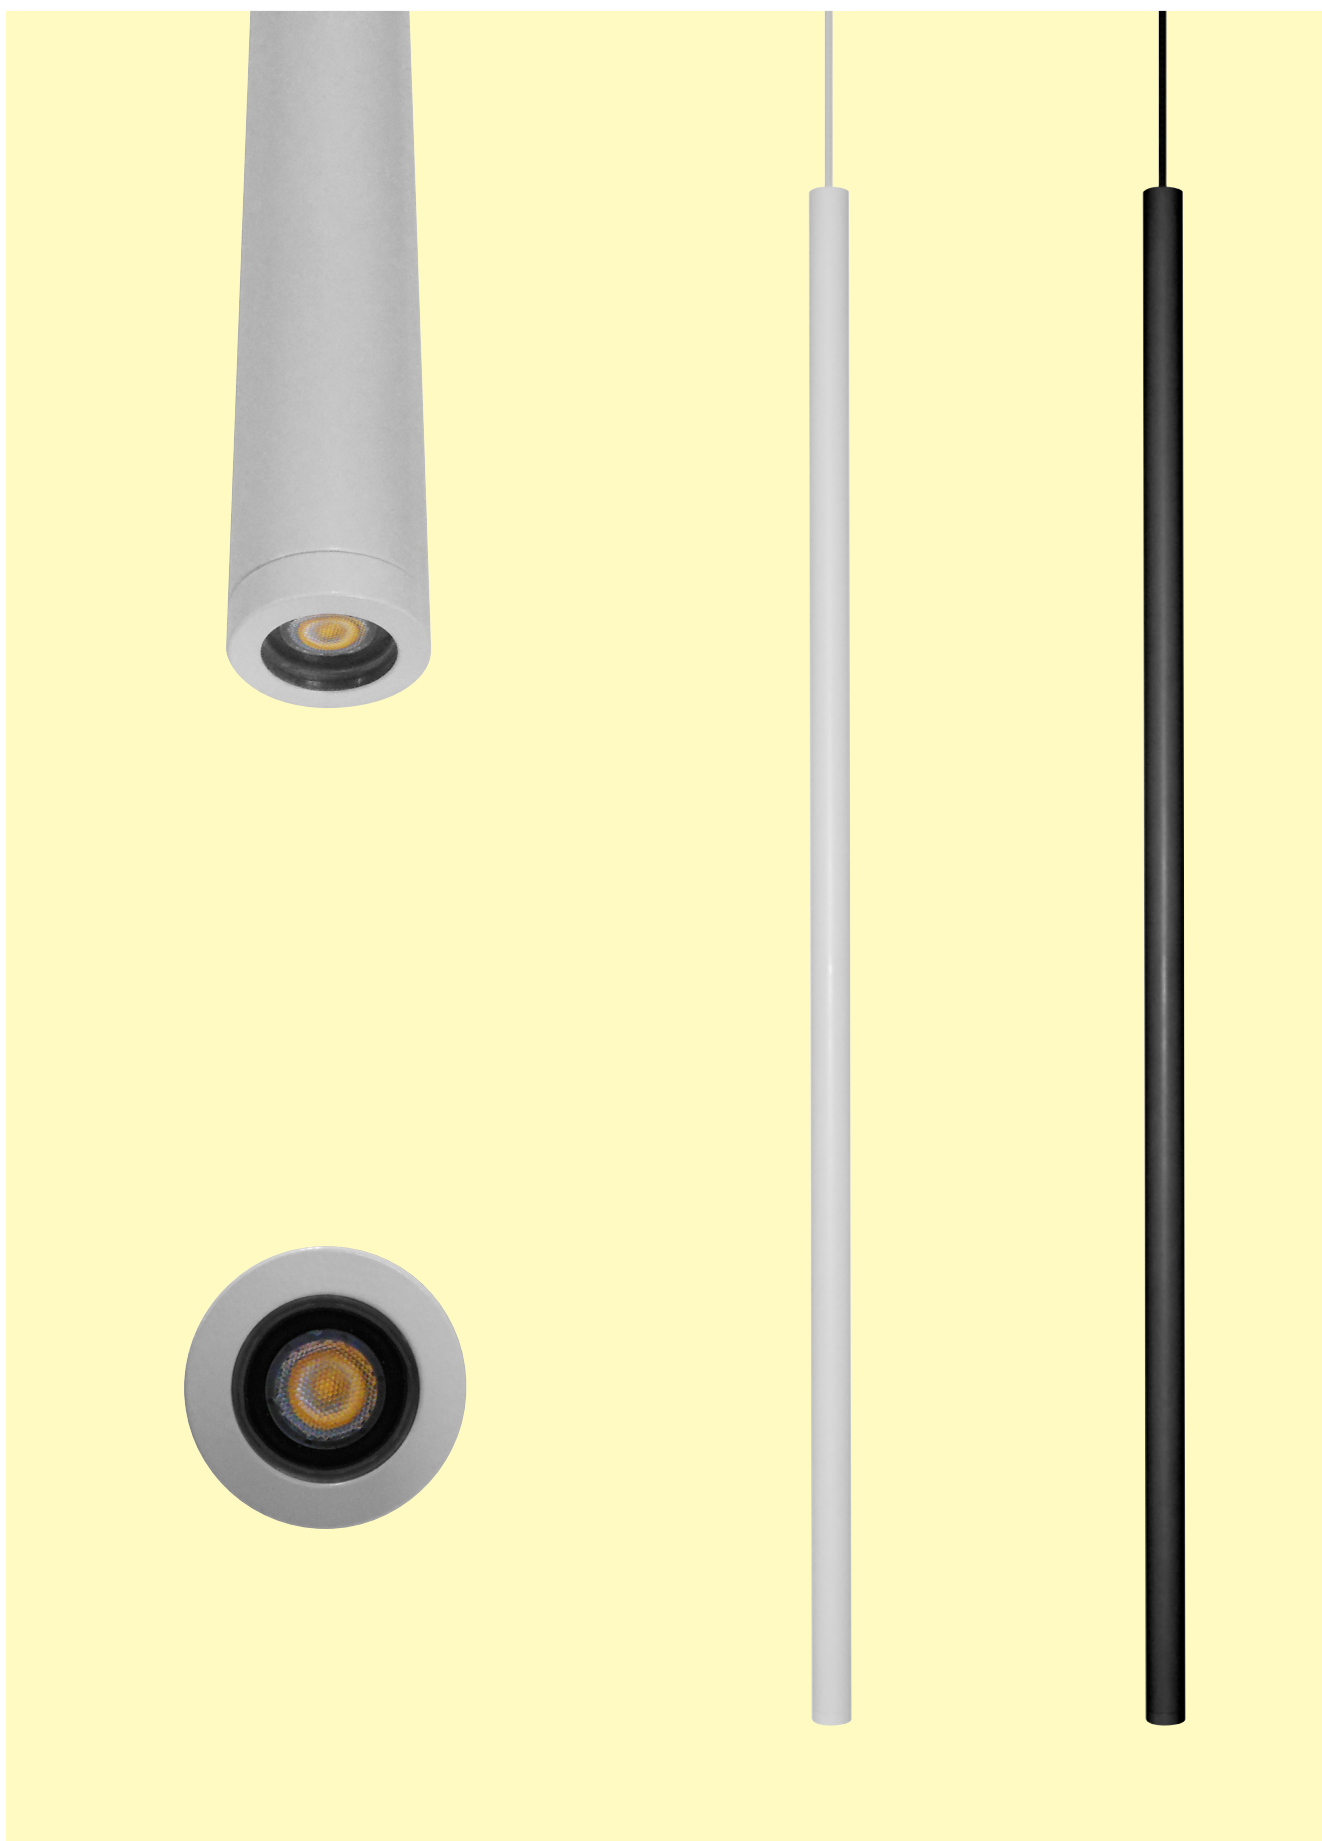

Installation

Suspended decorative luminaire with customizable rope main body lenght.


Technical description

Body made of extruded aluminum painted with polyester powder matt black, matt white or other colours upon request. Front closure made by pyrex glass. Ceiling fixing plate made of machined aluminum. Self-supporting wiring cable with aesthetical rubber coating. High quality power LED.

Electrical features

Remote power supply.
Class III luminaire.

Source type	Power LED
Luminaire wattage	1W - 2,1W
Colour temperature	2700K - 3000K - 4000K - RGB
CRI	80 - on request 90
Beam	11° - 32° - 45°
Driver	Remoted or in special plate
Input	Max 700 mA
Protection class	CLIII
IP rating	IP65
Weight	1,2 kg
Dimensions	Ø 26 x 1000
Available lenght	min 100 max 3000

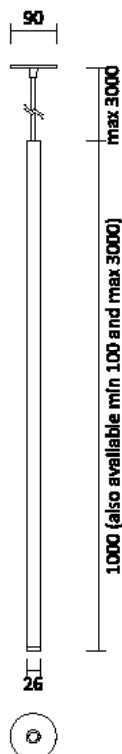

Product codes

Code	W	Optic	Lm	K	CRI
CSTELOS11Y	1	11°	115	2700	80
CSTELOS11W	1	11°	120	3000	80
CSTELOS11N	1	11°	120	4000	80
CSTELOS13Y	1	32°	130	2700	80
CSTELOS13W	1	32°	135	3000	80
CSTELOS13N	1	32°	135	4000	80
CSTELOS15Y	1	45°	130	2700	80
CSTELOS15W	1	45°	135	3000	80
CSTELOS15N	1	45°	135	4000	80
CSTELOS11Y	2.1	11°	195	2700	80
CSTELOS11W	2.1	11°	210	3000	80
CSTELOS11N	2.1	11°	210	4000	80
CSTELOS13Y	2.1	32°	220	2700	80
CSTELOS13W	2.1	32°	235	3000	80
CSTELOS13N	2.1	32°	235	4000	80
CSTELOS15Y	2.1	45°	220	2700	80
CSTELOS15W	2.1	45°	235	3000	80
CSTELOS15N	2.1	45°	235	4000	80

+ Finishing codes

Code	Description
BP	Matt black powder painted
WP	Matt white powder painted
CP	Other custom colour

+ Power supply codes

Code	Power Supply Type
ST0350	Standard - 350 mA - 1W
DI0350	DIM1-10 - 350 mA - 1W
DA0350	DIM DALI - 350 mA - 1W
ST0700	Standard - 700 mA - 2.1W
DI0700	DIM1-10 - 700 mA - 2.1W
DA0700	DIM DALI - 700 mA - 2.1W

RGB version available