

## BOUGIE

CE IP66 CLI 

Laser cutted drawing and shade dimension are fully customizable.

#### Installation

Wall mounted decorative luminaire, for indoor and outdoor installation.

#### Technical description

Shade and wall plate made of laser cutted steel sheet, folded, galvanized and painted with polyester powder.  
Lamp base made of black anodized machined aluminum.  
Cylindrical diffuser made of UV stabilized polycarbonate.


#### Electrical features

E27 lampholder.  
Class I device.

Source type	LED bulb.
Luminaire wattage	Max 11W
Colour temperature	2700K - 3000K - 4000K
CRI	80 - also available 90
Beam	Diffuse
Input	220-240V 50/60Hz
Protection class	CLI
IP rating	IP66
Weight	1,65 kg
Dimensions	h 280 x l 200 x w 148

**BOUGIE**

CE IP66 CLI F

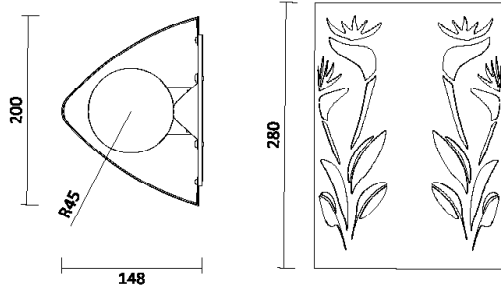

**Product codes**

Code	W	Optic	K	CRI
CBOUGIE11Y	Max 11	Diffuse	2700	80
CBOUGIE11W	Max 11	Diffuse	3000	80
CBOUGIE11N	Max 11	Diffuse	4000	80

**+ Finishing codes**

Code	Description
BP	Bronze powder painted
WP	White powder painted
SP	Sablé Noir powder painted
CP	Custom colour powder painted

**+ Power supply codes**

Code	Power Supply Type
DIR220	Direct feeding - 220-240V



Avaiki / Hotel, Singapore