

SHARP 100

CE IP66 CLII/I **Installation**

Surface mounted projectors for outdoor installation.

Technical description

Body, front frame and rear closure are made of die-cast aluminum, painted with polyester powder.
 Front closure made of extra-clear tempered glass.
 Bracket made of laser cutted stainless steel, finished as the body.
 High quality power LED.

Electrical features

Integrated power supply.
 Class I device, on request CLII.

Optical features


The integrated grid together with the deep recessed LED board provide a very low glaring beam.

**Source type**

Power LED
 Luminaire wattage 9W - 13.5W
 Colour temperature 2700K - 3000K - 4000K
 CRI 80 - on request 90
 Beam 13° - 25° - 50° - 11X55°
 Driver Integrated
 Input 220-240V 50/60Hz
 Protection class CLI - On request CLII
 IP rating IP66
 Weight 1.1 kg
 Dimension w 90 x l 99 x h 133

SHARP 100 9W

CE IP66 CLII/I

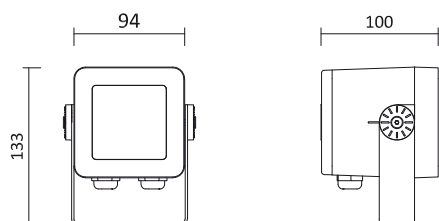

Product codes

| Code | W | Optic | Lm | K | CRI |
|------------|---|--------|-----|------|-----|
| ASHARSB11Y | 9 | 13° | 695 | 2700 | 80 |
| ASHARSB11W | 9 | 13° | 735 | 3000 | 80 |
| ASHARSB11N | 9 | 13° | 790 | 4000 | 80 |
| ASHARSB12Y | 9 | 25° | 685 | 2700 | 80 |
| ASHARSB12W | 9 | 25° | 730 | 3000 | 80 |
| ASHARSB12N | 9 | 25° | 785 | 4000 | 80 |
| ASHARSB13Y | 9 | 50° | 660 | 2700 | 80 |
| ASHARSB13W | 9 | 50° | 685 | 3000 | 80 |
| ASHARSB13N | 9 | 50° | 735 | 4000 | 80 |
| ASHARSB14Y | 9 | 11X55° | 610 | 2700 | 80 |
| ASHARSB14W | 9 | 11X55° | 645 | 3000 | 80 |
| ASHARSB14N | 9 | 11X55° | 695 | 4000 | 80 |


+ Finishing codes

| Code | Description |
|------|-----------------------------|
| GP | Grey RAL9006 powder painted |
| SP | Sable noir powder painted |
| WP | White powder painted |


+ Power supply codes

| Code | Power supply type |
|--------|-------------------|
| ST0700 | Standard - 700 mA |
| DI0700 | DIM1-10 - 700 mA |
| DA0700 | DIM DALI - 700 mA |


13° 9W

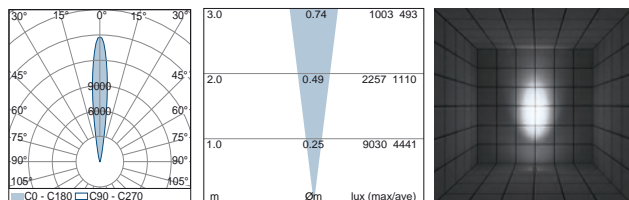


25° 9W

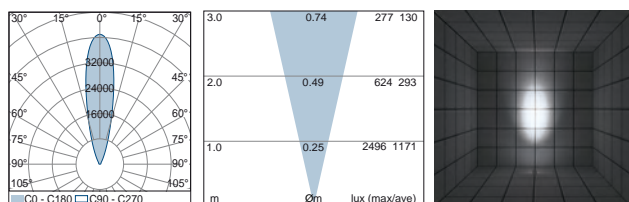



50° 9W

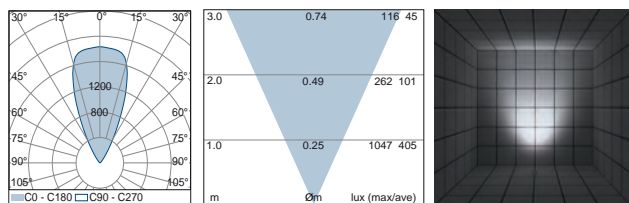

11X55° 9W

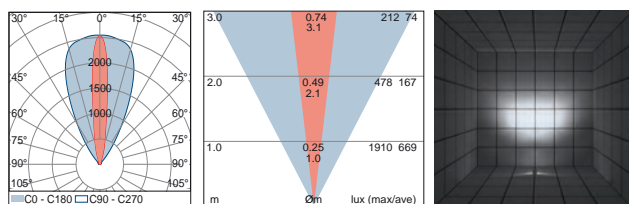

SHARP 100 13.5W

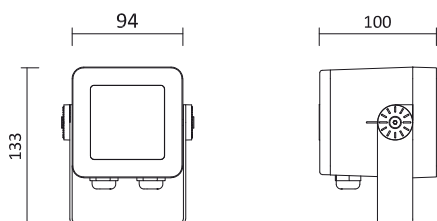

Product codes

| Code | W | Optic | Lm | K | CRI |
|------------|------|--------|------|------|-----|
| ASHARSB21Y | 13.5 | 13° | 960 | 2700 | 80 |
| ASHARSB21W | 13.5 | 13° | 1015 | 3000 | 80 |
| ASHARSB21N | 13.5 | 13° | 1090 | 4000 | 80 |
| ASHARSB22Y | 13.5 | 25° | 945 | 2700 | 80 |
| ASHARSB22W | 13.5 | 25° | 1005 | 3000 | 80 |
| ASHARSB22N | 13.5 | 25° | 1080 | 4000 | 80 |
| ASHARSB23Y | 13.5 | 50° | 890 | 2700 | 80 |
| ASHARSB23W | 13.5 | 50° | 940 | 3000 | 80 |
| ASHARSB23N | 13.5 | 50° | 1015 | 4000 | 80 |
| ASHARSB24Y | 13.5 | 11X55° | 840 | 2700 | 80 |
| ASHARSB24W | 13.5 | 11X55° | 890 | 3000 | 80 |
| ASHARSB24N | 13.5 | 11X55° | 955 | 4000 | 80 |


+ Finishing codes

| Code | Description |
|------|-----------------------------|
| GP | Grey RAL9006 powder painted |
| SP | Sable noir powder painted |
| WP | White powder painted |


+ Power supply codes

| Code | Power supply type |
|---------|--------------------|
| ST01050 | Standard - 1050 mA |
| DI01050 | DIM1-10 - 1050 mA |
| DA01050 | DIM DALI - 1050 mA |


13° 13.5W

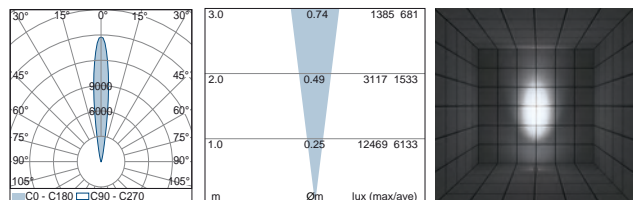


25° 13.5W

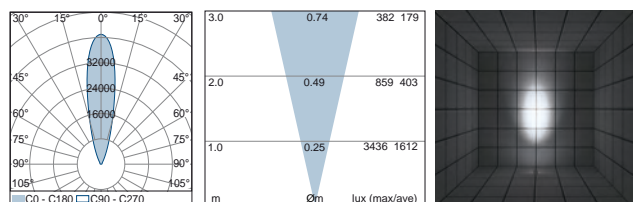

50° 13.5W

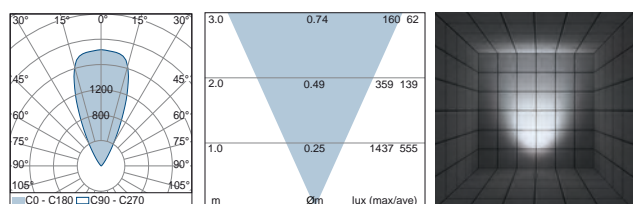

11X55° 13.5W

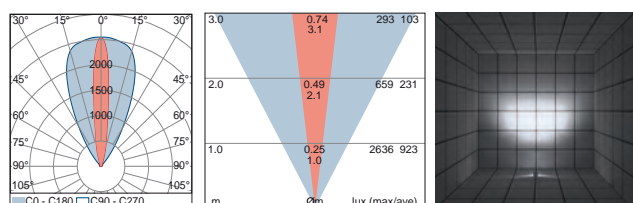



SHARP 100 / Lapita Hotel, Dubai

Tassoni & Pesenti