

## Luxy AR111 Fix

CE IP20 CLIII 



### Installation

Ceiling recessed luminaire for indoor and outdoor installation.

### Technical description

Front ring made of die-cast aluminum, painted with polyester powder.

Harmonic stainless steel springs for installation in false ceiling.

Led module AR111 by Sora.

### Electrical Features

Remote power supply not included.

Class III device.

### Source Type

LED lamp

### Luminaire wattage

12.5W - 18.5W

### Colour temperature

2700K - 3000K - 4000K

### CRI

80 - on request 90

### Beam

8° - 25° - 36°

### Driver

Remote

### Input Current

12V +/- 1,2V 50/60 Hz.

### Insulation class

CLIII

### IP rating

IP20

### Weight


0.7 kg

### Dimensions

Ø 170 x h 95

# Luxy AR111 Fix 12.5W

CE IP20 CLIII

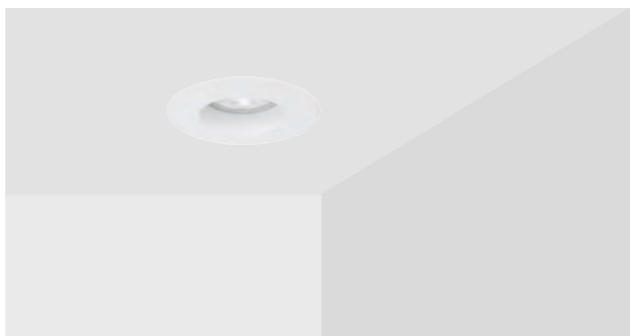

### Product Codes


Code	W	Optic	Lm	K	CRI
ALUXYRF61Y	12.5	8°	735	2700	85
ALUXYRF61W	12.5	8°	795	3000	85
ALUXYRF61N	12.5	8°	645	4000	95
ALUXYRF63Y	12.5	25°	735	2700	85
ALUXYRF63W	12.5	25°	795	3000	85
ALUXYRF63N	12.5	25°	645	4000	95
ALUXYRF64Y	12.5	36°	735	2700	85
ALUXYRF64W	12.5	36°	795	3000	85
ALUXYRF64N	12.5	36°	645	4000	95

### + Finishing codes


Code	Description
BP	Black powder painted
WP	White powder painted

### + Power supply codes


Code	Power supply type
ST0012	Standard - 12V AC
DI0012	DIM1-10 - 12V AC
DA0012	DIM DALI - 12V AC

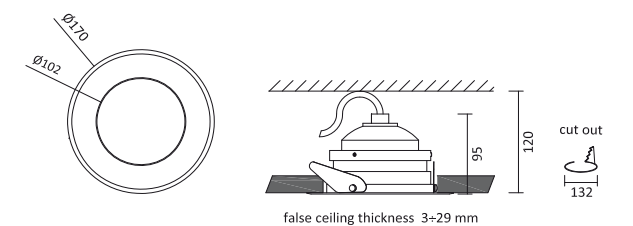


### 8° 12.5W

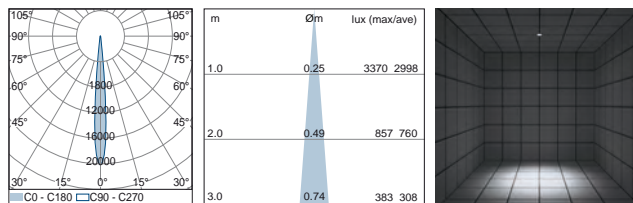

### 25° 12.5W


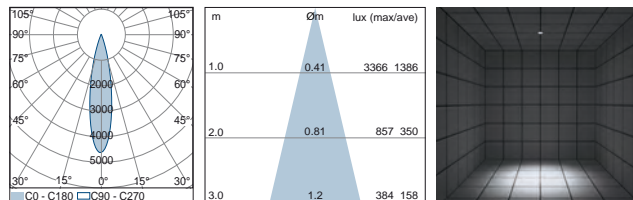


### 36° 12.5W

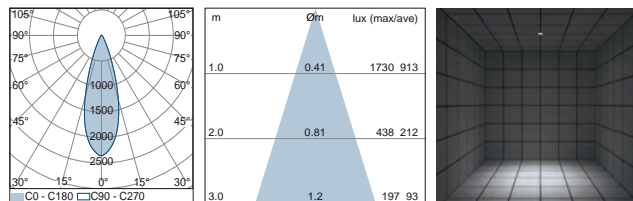

# Luxy AR111 18.5W

CE IP20 CLIII

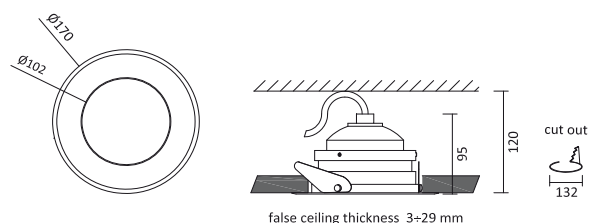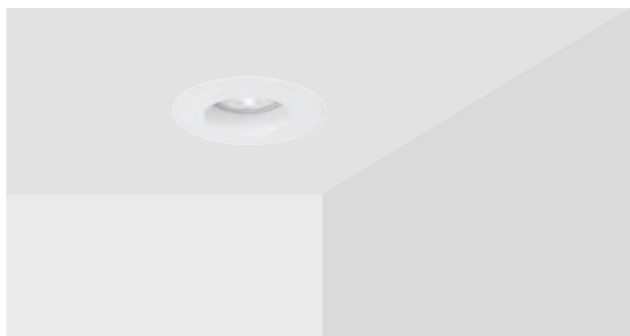

### Product Codes

Code	W	Optic	Lm	K	CRI
ALUXYRF72Y	18.5	9°	1190	2700	85
ALUXYRF72W	18.5	9°	1280	3000	85
ALUXYRF72N	18.5	9°	1040	4000	95
ALUXYRF73Y	18.5	25°	1190	2700	85
ALUXYRF73W	18.5	25°	1280	3000	85
ALUXYRF73N	18.5	25°	1040	4000	95
ALUXYRF74Y	18.5	36°	1190	2700	85
ALUXYRF74W	18.5	36°	1280	3000	85
ALUXYRF74N	18.5	36°	1040	4000	95


### + Finishing codes

Code	Description
BP	Black powder painted
WP	White powder painted


### + Power supply codes

Code	Power supply type
ST0012	Standard - 12V AC
DI0012	DIM1-10 - 12V AC
DA0012	DIM DALI - 12V AC

#### 9° 18.5W

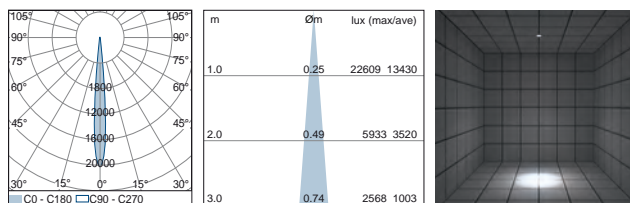

#### 25° 18.5W

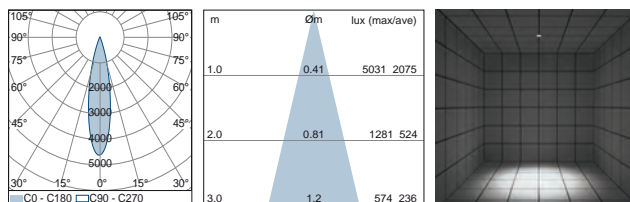

#### 36° 18.5W

