

ANGEL INOX - OPAL

CE IP66 CLI/II 

Installation


Residential lighting suitable for garden and pathways but also for squares and public areas.
Luminaire provided with fixing plate.

Technical description

Main body made of AISI316L stainless steel brushed finish or polished finish.
Top closure made of machined AISI316L stainless steel with same finish of the main body.
Diffuser made of high efficiency, anti-shock opal or clear and UV-protected polycarbonate.
Fixing plate made of laser cutted AISI316L stainless steel.


Electrical Features

Power supply integrated.
Class I/II luminaire.

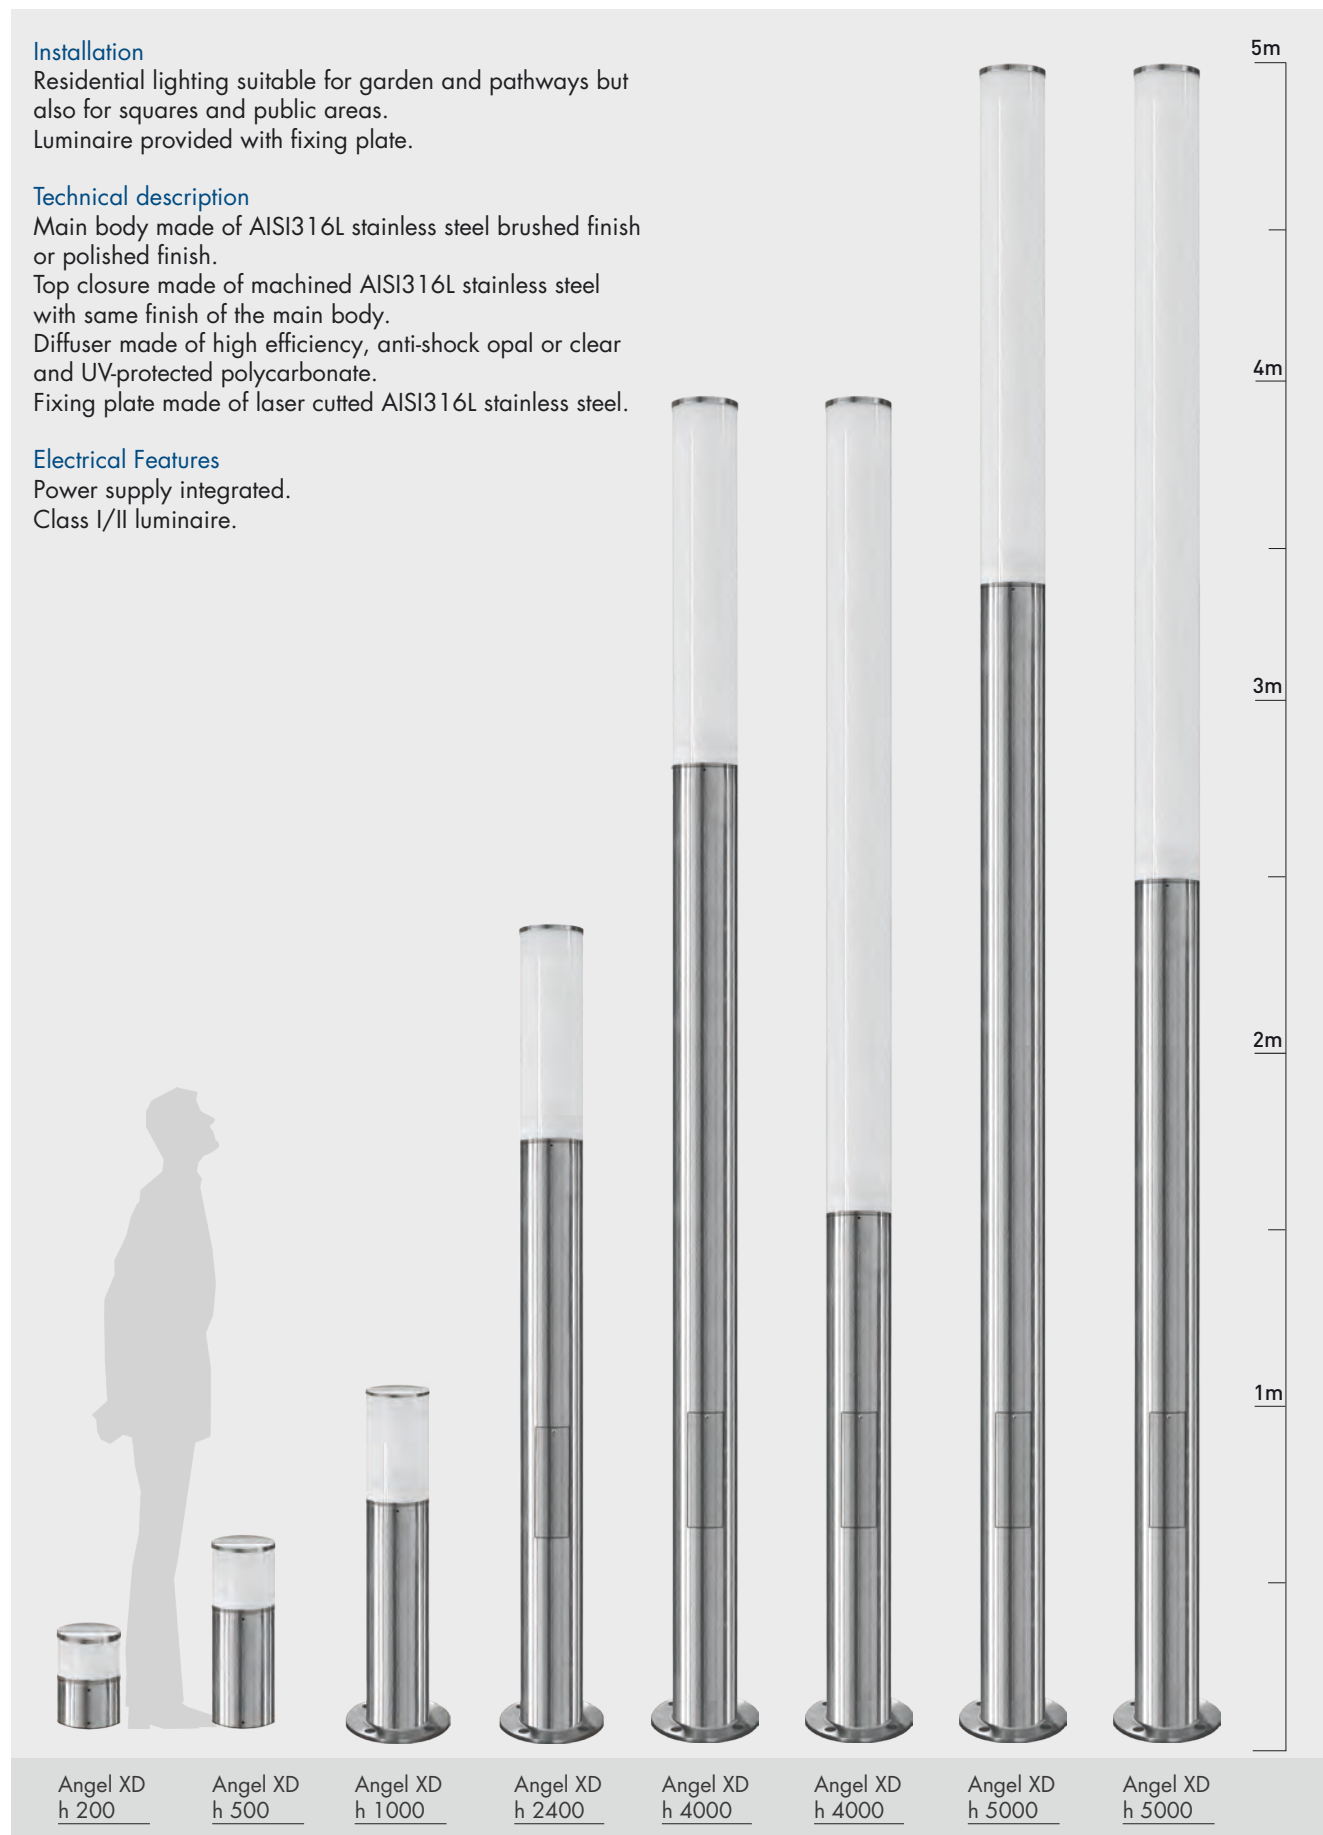

ANGEL INOX - CUT-OFF

CE IP66 CLI/II 

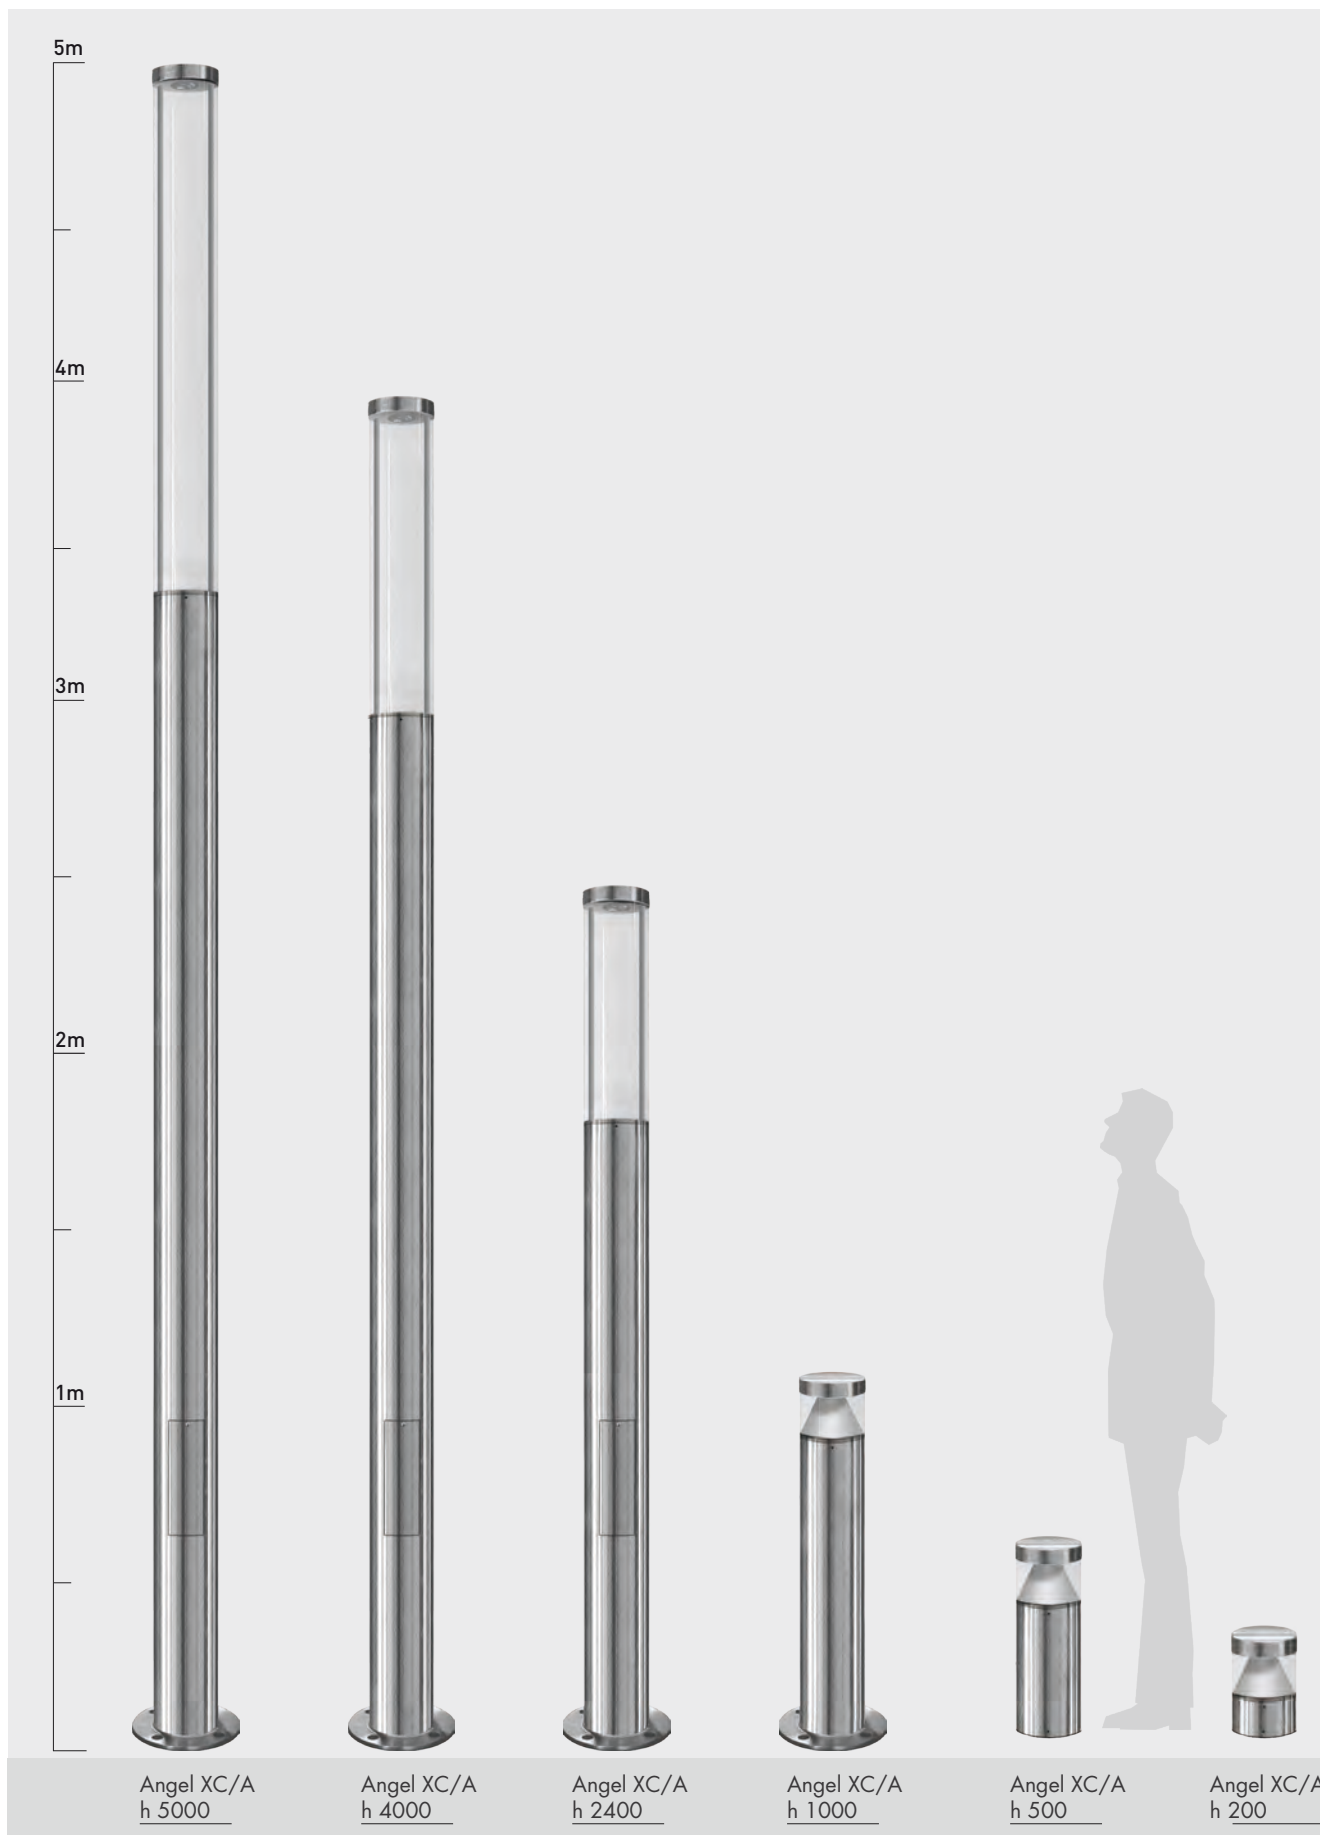

ANGEL INOX

CE IP66 CLI/II 


Easy led maintenance.

Diffuser made of high efficiency, anti-shock opal or clear UV-protected polycarbonate.

AISI316L structure.
Anti-aging silicone gaskets.

Flush cut-out door with wiring connection accessories and driver.

Easy and fast installation.

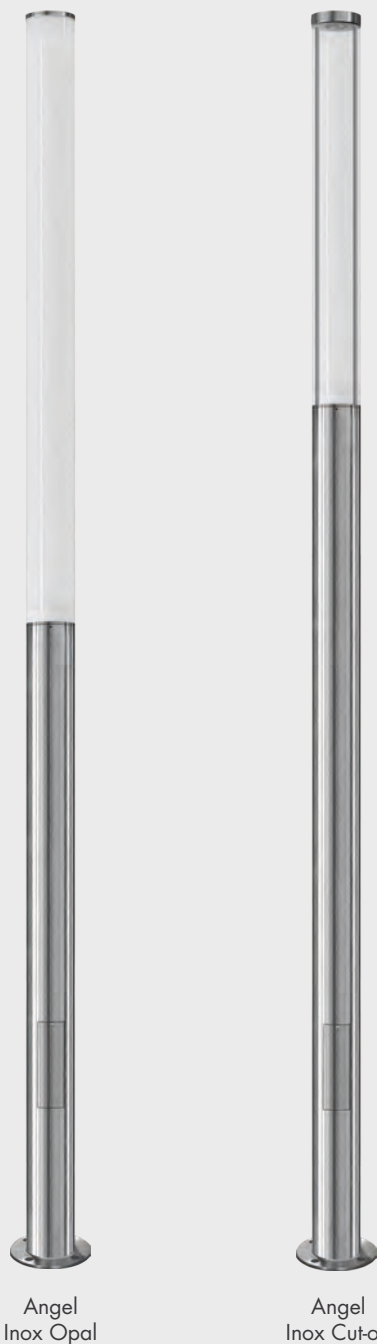

Angel
Inox Opal

Angel
Inox Cut-off

Source type	Mid power LED / COB LED
Colour temperature	2700K - 3000K - 4000K
Beam	Diffuse - Cut-off
Driver	Integrated
Input	220-240 V 50/60 Hz
Protection class	CLI/II
IP rating	IP66
ANGEL 114	
Luminaire wattage	9W-18W-27W-37W-62W
Dimension	D114 X H
ANGEL 206	
Luminaire wattage	12W-24W-36W-48W-80W-93W-120W
Dimension	D206 X H


+ Finishing codes	
Code	Description
IS	Stainless steel AISI316L brushed
IP	Stainless steel AISI316L polished
+ Power supply codes	
Code	Power supply type
ST	Standard
DI	DIM1-10
DA	DIM DALI




ANGEL XD114 & XD206: AISI316L - Ø 114 & 206 mm - diffuse

Optic	Diameter	Product name	A (mm)	B (mm)	W	K	Lm	Code	
<p>ANGEL XD114</p>	<p>Ø114</p>	ANGEL XD114/200	200	100	9	3000 4000 RGB	500 510 340	ANXD114020W ANXD114020N ANXD114020R	
		ANGEL XD114/500	500	200	18	3000 4000 RGB	1000 1020 680	ANXD114050W ANXD114050N ANXD114050R	
		ANGEL XD114/1000	1000	300	27	3000 4000 RGB	1500 1530 1020	ANXD114100W ANXD114100N ANXD114100R	
		ANGEL XD114/2400	2400	600	37	3000 4000 RGB	1945 2000 1325	ANXD114240W ANXD114240N ANXD114240R	
		ANGEL XD114/4000	4000	1000	62	3000 4000 RGB	3245 3335 2210	ANXD114400W ANXD114400N ANXD114400R	
		ANGEL XD206/200	200	100	12	3000 4000 RGB	595 610 405	ANXD206020W ANXD206020N ANXD206020R	
	<p>ANGEL XD206</p>	<p>Ø206</p>	ANGEL XD206/500	500	200	24	3000 4000 RGB	1190 1220 810	ANXD206050W ANXD206050N ANXD206050R
			ANGEL XD206/1000	1000	300	36	3000 4000 RGB	1785 1830 1215	ANXD206100N ANXD206100N ANXD206100R
			ANGEL XD206/2400	2400	600	48	3000 4000 RGB	2985 4185 2035	ANXD206240W ANXD206240N ANXD206240R
			ANGEL XD206/4000	4000	1000	80	3000 4000 RGB	4070 4880 2775	ANXD206400W ANXD206400N ANXD206400R
			ANGEL XD206/4000	4000	2400	120	3000 4000 RGB	6105 7320 4160	ANXD20640LW ANXD20640LN ANXD20640LR
			ANGEL XD206/5000	5000	1500	93	3000 4000 RGB	4745 4000 3240	ANXD206500W ANXD206500N ANXD206500R
<p>OPAL</p>		<p>ANGEL XD206</p>	ANGEL XD206/5000	5000	2400	120	3000 4000 RGB	6105 7320 4160	ANXD20650LW ANXD20650LN ANXD20650LR


Opal H 500 18W

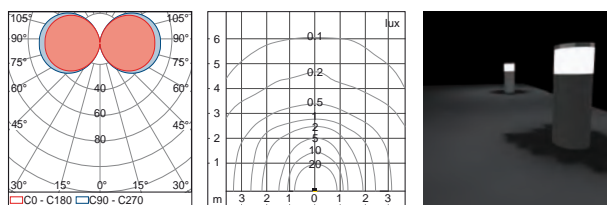


Opal H 1000 27W

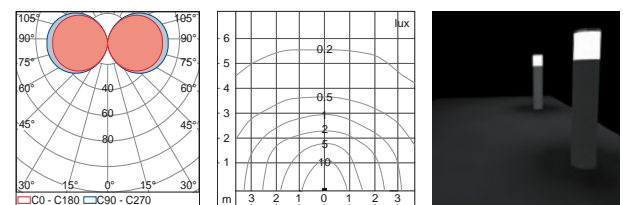

Opal H 2400 37W

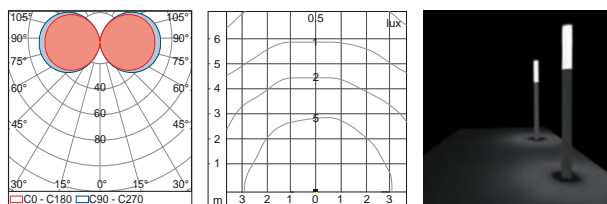

Opal H 4000 62W

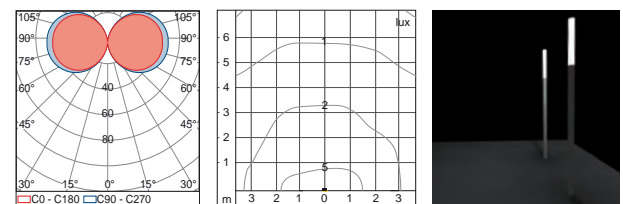





ANGEL XC114 & XC206: AISI316L - Ø 114 & 206 mm - clear cut-off 360°

Optic	Diameter	Product name	A (mm)	B (mm)	W	K	Lm	Code
<p>CUT-OFF 360°</p>	<p>ANGEL XC114</p>	ANGEL XC114/200	200	100	9	3000 4000	875 875	ANXC114020W ANXC114020N
		ANGEL XC114/500	500	100	9	3000 4000	875 875	ANXC114050W ANXC114050N
		ANGEL XC114/1000	1000	100	9	3000 4000	875 875	ANXC114100W ANXC114100N
		ANGEL XC114/2400	2400	600	24	3000 4000	1945 2000	ANXC114240W ANXC114240N
		ANGEL XC114/4000	4000	1000	34	3000 4000	3245 3335	ANXC114400W ANXC114400N
		<p>ANGEL XC206</p>	ANGEL XC206/200	200	100	17	3000 4000	1580 1680
	ANGEL XC206/500		500	200	17	3000 4000	1580 1680	ANXC206050W ANXC206050N
	ANGEL XC206/1000		1000	100	17	3000 4000	1580 1680	ANXC206100W ANXC206100N
	ANGEL XC206/2400		2400	600	34	3000 4000	2865 3050	ANXC206240W ANXC206240N
	ANGEL XC206/4000		4000	1000	44	3000 4000	3515 3740	ANXC206400W ANXC206400N
	ANGEL XC206/5000		5000	1500	44	3000 4000	3515 3740	ANXC206500W ANXC206500N


Cut-off H 500 9W

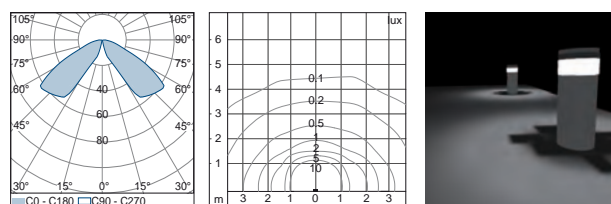


Cut-off H 1000 9W

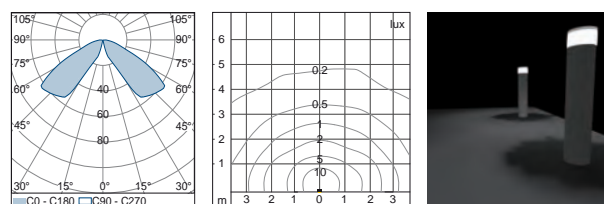

Cut-off H 2400 24W

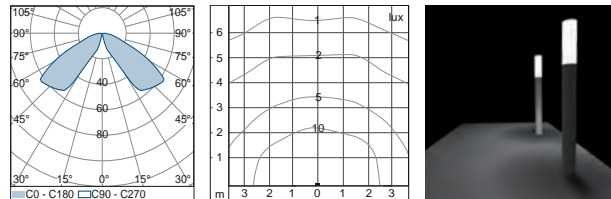

Cut-off H 4000 34W

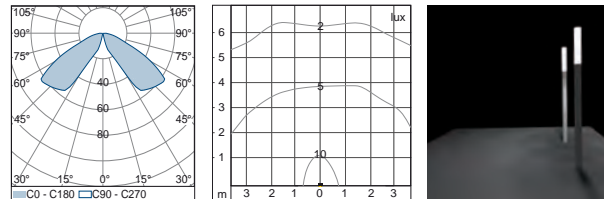





ANGEL XA114 & XA206: AISI316L - Ø 114 & 206 mm - clear cut-off 180°

Optic	Diameter	Product name	A (mm)	B (mm)	W	K	Lm	Code
<p>CUT-OFF 180°</p>	<p>ANGEL XA114</p>	ANGEL XA114/200	200	100	9	3000 4000	875 875	ANXA114020W ANXA114020N
		ANGEL XA114/500	500	100	9	3000 4000	875 875	ANXA114050W ANXA114050N
		ANGEL XA114/1000	1000	100	9	3000 4000	875 875	ANXA114100W ANXA114100N
		ANGEL XA114/2400*	2400	600	24	3000 4000	1945 2000	ANXA114240W ANXA114240N
		ANGEL XA114/4000*	4000	1000	34	3000 4000	3245 3335	ANXA114400W ANXA114400N
		ANGEL XA206/200	200	100	17	3000 4000	1580 1680	ANXA206020W ANXA206020N
	ANGEL XA206/500	500	200	24	3000 4000	1580 1680	ANXA206050W ANXA206050N	
	ANGEL XA206/1000	1000	100	17	3000 4000	1580 1680	ANXA206100W ANXA206100N	
	ANGEL XA206/2400*	2400	600	34	3000 4000	2865 3050	ANXA206240W ANXA206240N	
	ANGEL XA206/4000*	4000	1000	44	3000 4000	3515 3740	ANXA206400W ANXA206400N	
	ANGEL XA206/5000*	5000	1500	44	3000 4000	3515 3740	ANXA206500W ANXA206500N	


Cut-off H 500 9W

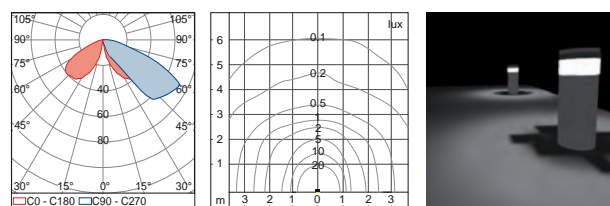


Cut-off H 1000 9W

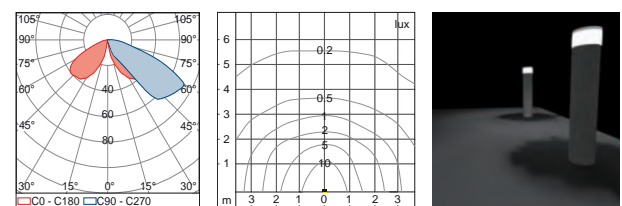

Cut-off H 2400 24W

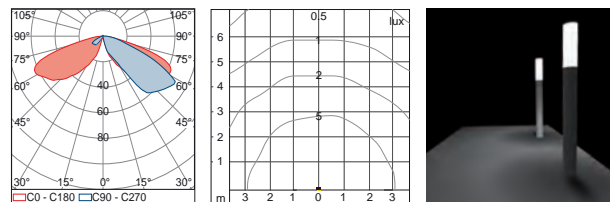

Cut-off H 4000 34W

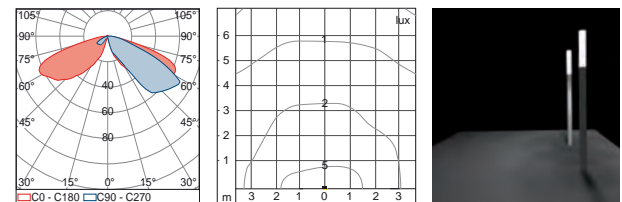

* ANGEL AX114/2400-4000, ANGEL AX206/2400-4000-5000 are provided with street asymmetric optics.



ANGEL / Abu-Dhabi

Tassoni & Pesenti

