

Luxy Low

CE IP65 CLIII 



Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of die-cast aluminum, painted with polyester powder.
Harmonic stainless steel springs for installation in false ceiling.
High quality power LED.

Electrical features

Remote power supply not included.
Class III device.

Source Type

High power LED

Luminaire wattage

5.5W - 7.8W

Colour temperature

2700K - 3000K - 4000K

CRI

80 - on request 90

Beam

21° - 26° - 45° - 65°

Driver

Remote

Input Current

Max 700 mA

Protection class

CLIII

IP rating

IP65

Weight



0.25 kg

Dimensions

Ø 85 x h 52

Luxy Low 5.5W

CE IP65 CLIII

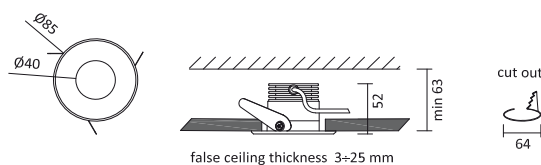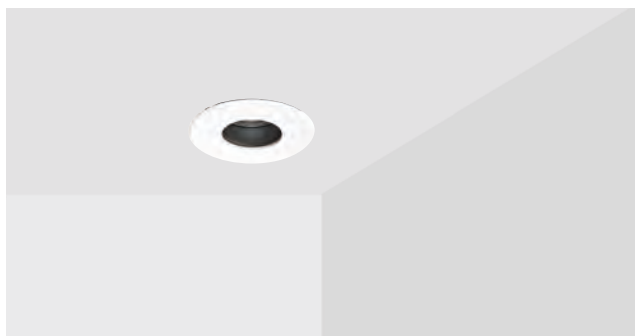

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYLF11Y	5.5	21°	535	2700	80
ALUXYLF11W	5.5	21°	570	3000	80
ALUXYLF11N	5.5	21°	605	4000	80
ALUXYLF12Y	5.5	26°	530	2700	80
ALUXYLF12W	5.5	26°	565	3000	80
ALUXYLF12N	5.5	26°	600	4000	80
ALUXYLF13Y	5.5	45°	470	2700	80
ALUXYLF13W	5.5	45°	500	3000	80
ALUXYLF13N	5.5	45°	535	4000	80
ALUXYLF14Y	5.5	65°	465	2700	80
ALUXYLF14W	5.5	65°	495	3000	80
ALUXYLF14N	5.5	65°	525	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


21° 5.5W

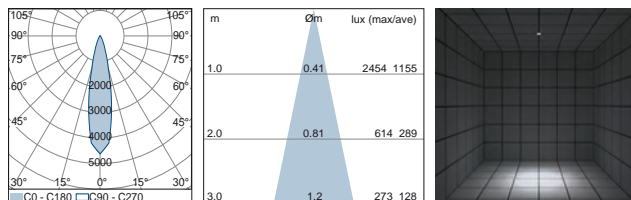


26° 5.5W

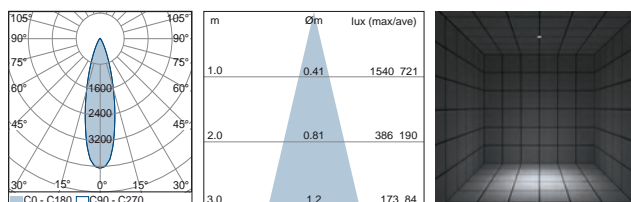

45° 5.5W


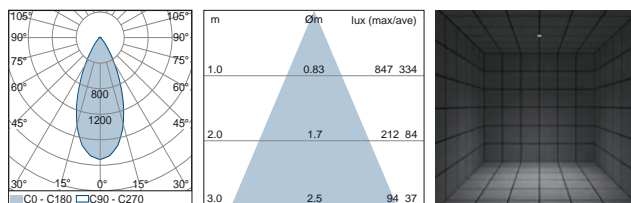


65° 5.5W

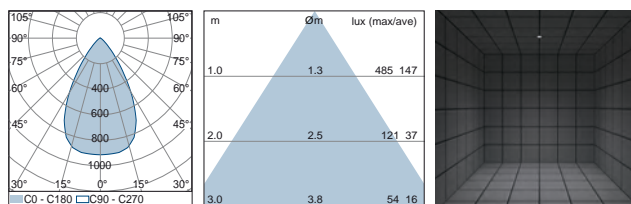

Luxy Low 7.8W

CE IP65 CLIII

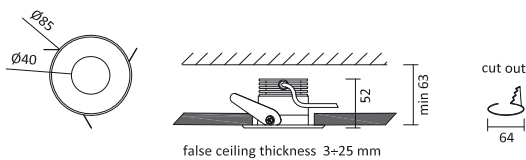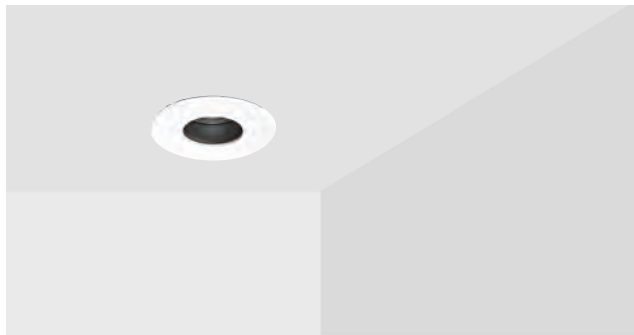

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYLF21Y	7.8	21°	715	2700	80
ALUXYLF21W	7.8	21°	760	3000	80
ALUXYLF21N	7.8	21°	805	4000	80
ALUXYLF22Y	7.8	26°	705	2700	80
ALUXYLF22W	7.8	26°	750	3000	80
ALUXYLF22N	7.8	26°	800	4000	80
ALUXYLF23Y	7.8	45°	630	2700	80
ALUXYLF23W	7.8	45°	665	3000	80
ALUXYLF23N	7.8	45°	710	4000	80
ALUXYLF24Y	7.8	65°	620	2700	80
ALUXYLF24W	7.8	65°	660	3000	80
ALUXYLF24N	7.8	65°	705	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA


21° 7.8W

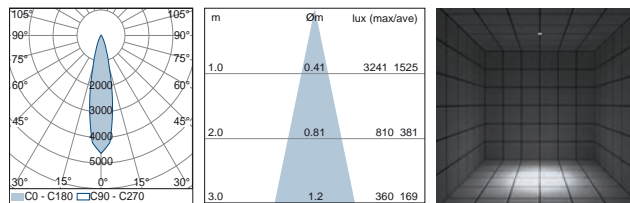


26° 7.8W

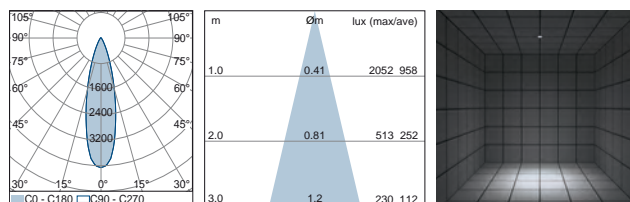

45° 7.8W

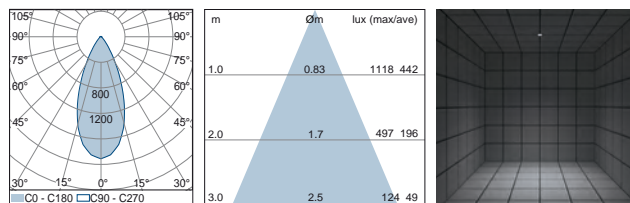

65° 7.8W

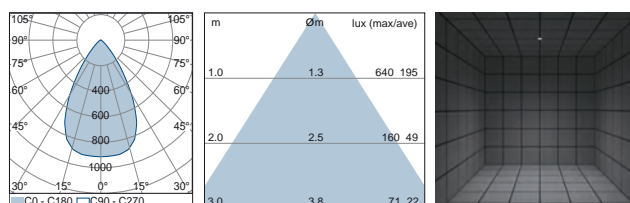



Luxy small Fix / Hotel, Dubai