


Luxy Small H

CE IP65 CLIII 

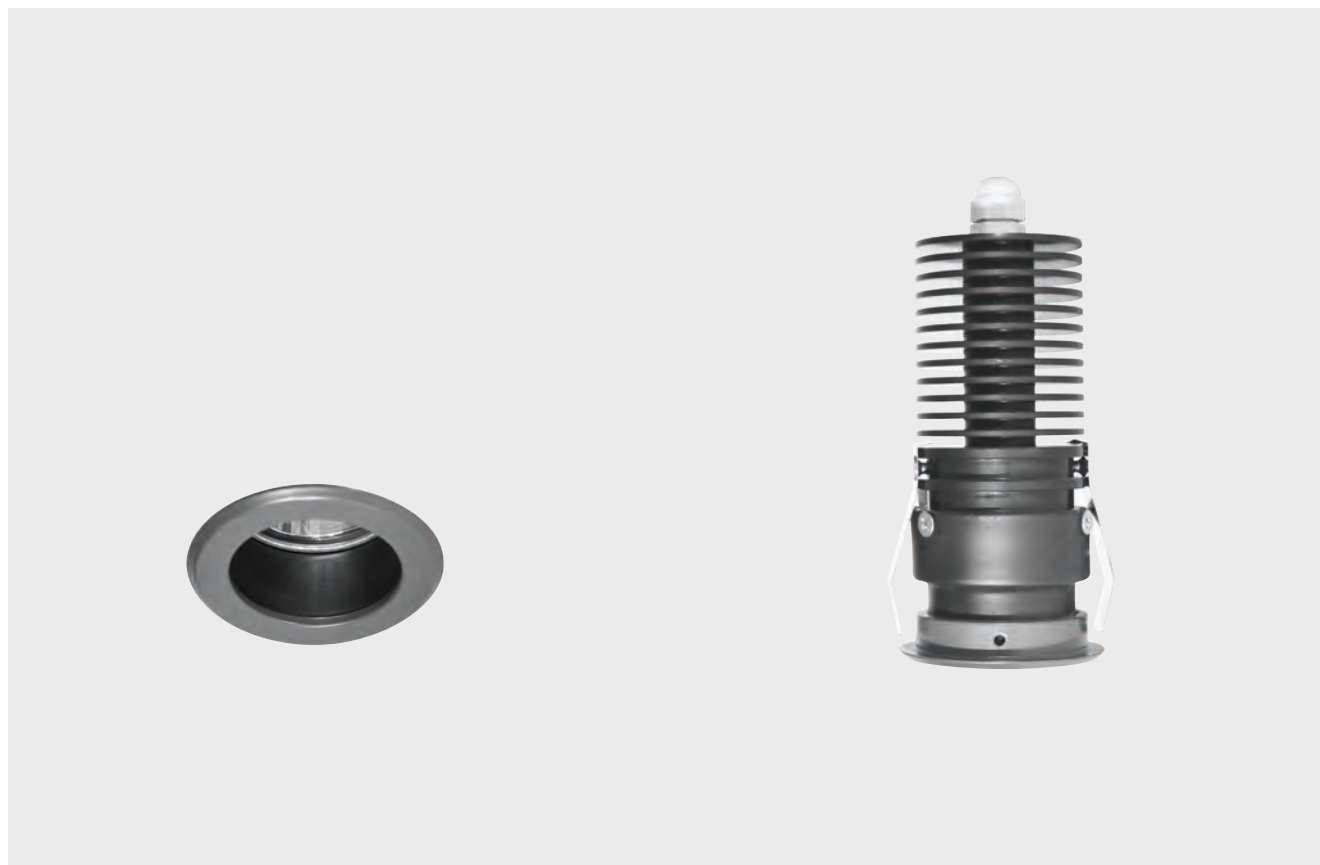

Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of die-cast aluminum, painted with polyester powder.
Harmonic stainless steel springs for installation in false ceiling.
High quality COB LED.

Electrical features

Remote power supply not included.
Class III device.

Dimension features

Luxy Small H is characterized by a reduced diameter of the front ring and an high luminous flux.



Source Type

COB LED

Luminaire wattage

16.7W

Colour temperature

2700K - 3000K - 4000K

CRI

80 - on request 90

Beam

25° - 34° - 46° - 75°

Driver

Remote

Input Current

Max 500 mA

Protection class

CLIII

IP rating

IP65

Weight


0.3 kg

Dimensions

Ø 60 x h 143

Luxy Small H 16.7W

CE IP65 CLIII 

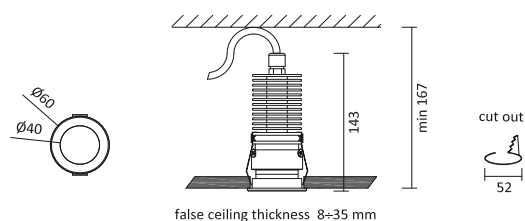

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYSH41Y	16.7	25°	2115	2700	80
ALUXYSH41W	16.7	25°	2200	3000	80
ALUXYSH41N	16.7	25°	2280	4000	90
ALUXYSH42Y	16.7	34°	2090	2700	80
ALUXYSH42W	16.7	34°	2175	3000	80
ALUXYSH42N	16.7	34°	2255	4000	80
ALUXYSH43Y	16.7	46°	2115	2700	80
ALUXYSH43W	16.7	46°	2205	3000	80
ALUXYSH43N	16.7	46°	2285	4000	80
ALUXYSH44Y	16.7	75°	2140	2700	80
ALUXYSH44W	16.7	75°	2230	3000	80
ALUXYSH44N	16.7	75°	2310	4000	80


+ Finishing codes

Code	Front Ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


25° 16.7W

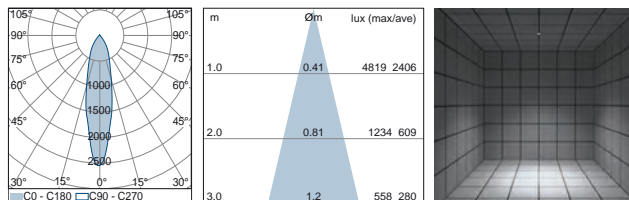

34° 16.7W

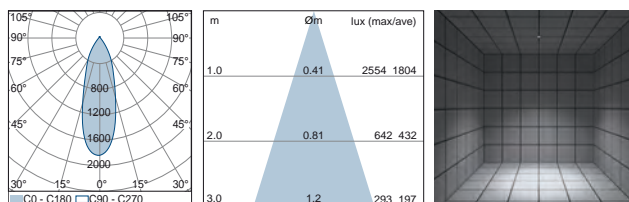

46° 16.7W

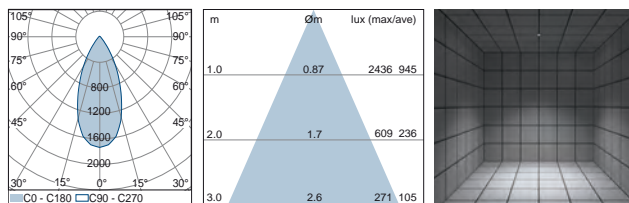

75° 16.7W

