


Luxy Small Fix

CE IP65 CLIII 

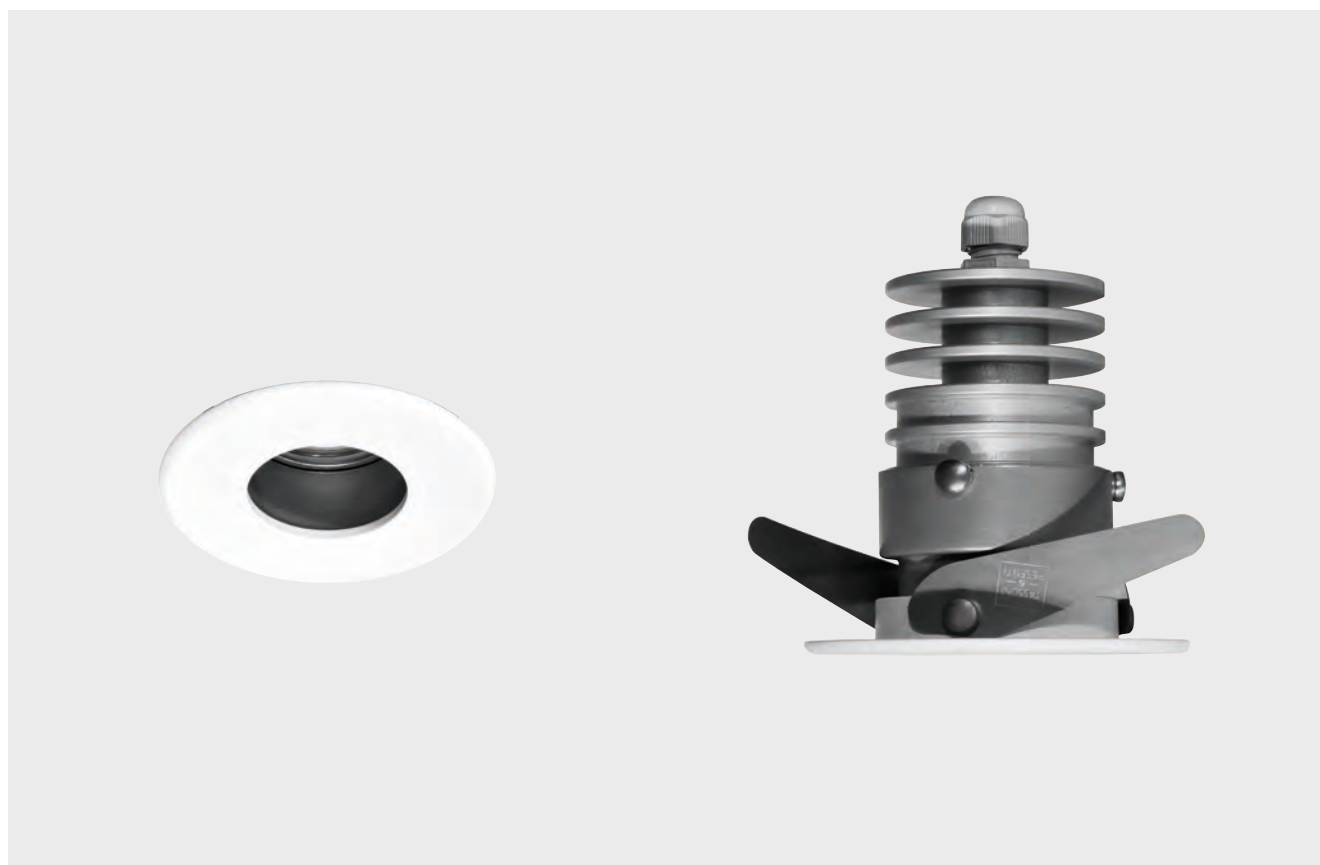

Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of die-cast aluminum, painted with polyester powder.
Harmonic stainless steel springs for installation in false ceiling.
High quality power LED.



Electrical features

Remote power supply not included.
Class III device.

| | |
|--------------------|-----------------------|
| Source type | High power LED |
| Luminaire wattage | 5.5W - 7.8W - 12W |
| Colour temperature | 2700K - 3000K - 4000K |
| CRI | 80 - on request 90 |
| Beam | 21° - 26° - 45° - 65° |
| Driver | Remote |
| Input current | Max 1050 mA |
| Protection class | CLIII |
| IP rating | IP65 |
| Weight | 0.3 kg |
| Dimensions | Ø 85 x h 110 |

Luxy Small Fix 5,5W

CE IP65 CLIII

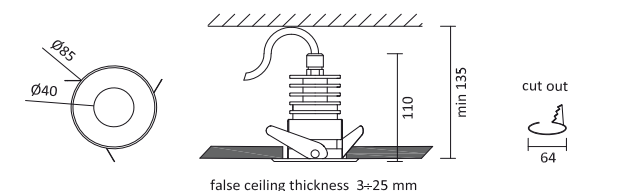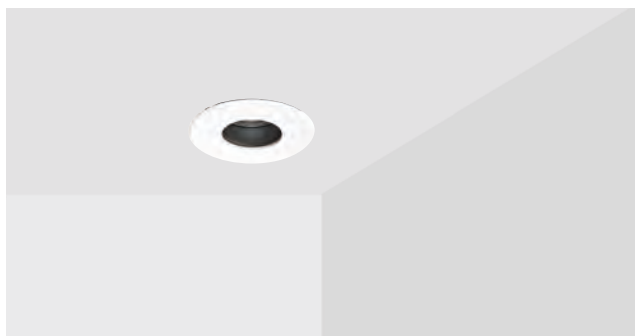

Product codes

| Code | W | Optic | Lm | K | CRI |
|------------|-----|-------|-----|------|-----|
| ALUXYLF11Y | 5.5 | 21° | 535 | 2700 | 80 |
| ALUXYLF11W | 5.5 | 21° | 570 | 3000 | 80 |
| ALUXYLF11N | 5.5 | 21° | 605 | 4000 | 80 |
| ALUXYLF12Y | 5.5 | 26° | 530 | 2700 | 80 |
| ALUXYLF12W | 5.5 | 26° | 565 | 3000 | 80 |
| ALUXYLF12N | 5.5 | 26° | 600 | 4000 | 80 |
| ALUXYLF13Y | 5.5 | 45° | 470 | 2700 | 80 |
| ALUXYLF13W | 5.5 | 45° | 500 | 3000 | 80 |
| ALUXYLF13N | 5.5 | 45° | 535 | 4000 | 80 |
| ALUXYLF14Y | 5.5 | 65° | 465 | 2700 | 80 |
| ALUXYLF14W | 5.5 | 65° | 495 | 3000 | 80 |
| ALUXYLF14N | 5.5 | 65° | 525 | 4000 | 80 |


+ Finishing codes

| Code | Front ring colour | Cone colour |
|------|-------------------|-------------|
| WB | White | Black |
| WW | White | White |
| WG | White | Gold |
| BB | Black | Black |
| BW | Black | White |
| BG | Black | Gold |


+ Power supply codes

| Code | Power supply type |
|--------|-------------------|
| ST0500 | Standard - 500 mA |
| DI0500 | DIM1-10 - 500 mA |
| DA0500 | DIM DALI - 500 mA |


21° 5.5W

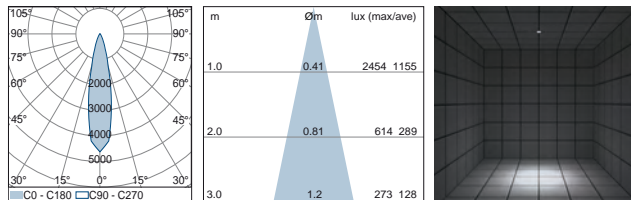


26° 5.5W

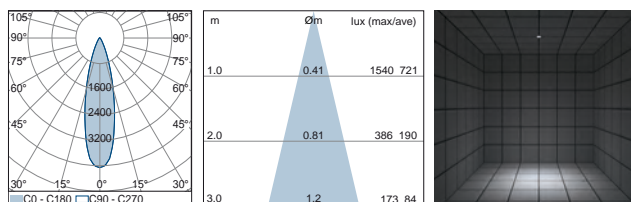

45° 5.5W

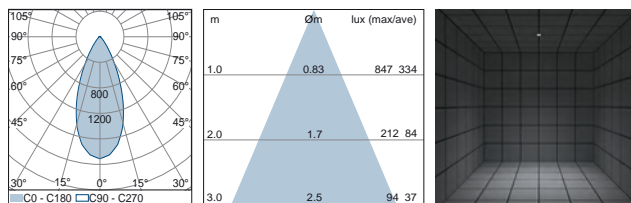


65° 5.5W

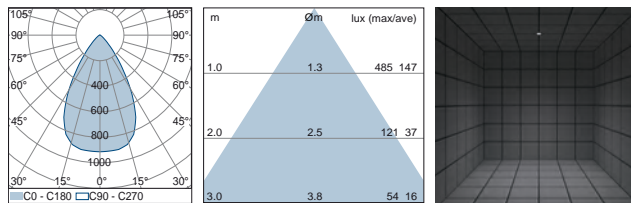

Luxy Small Fix 7.8W

CE IP65 CLIII

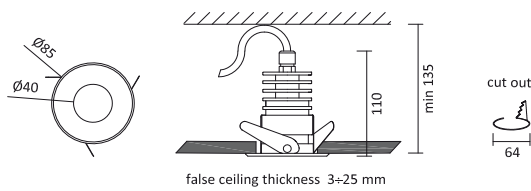

Product codes

| Code | W | Optic | Lm | K | CRI |
|------------|-----|-------|-----|------|-----|
| ALUXYSF21Y | 7.8 | 21° | 715 | 2700 | 80 |
| ALUXYSF21W | 7.8 | 21° | 760 | 3000 | 80 |
| ALUXYSF21N | 7.8 | 21° | 805 | 4000 | 80 |
| ALUXYSF22Y | 7.8 | 26° | 705 | 2700 | 80 |
| ALUXYSF22W | 7.8 | 26° | 750 | 3000 | 80 |
| ALUXYSF22N | 7.8 | 26° | 800 | 4000 | 80 |
| ALUXYSF23Y | 7.8 | 45° | 630 | 2700 | 80 |
| ALUXYSF23W | 7.8 | 45° | 665 | 3000 | 80 |
| ALUXYSF23N | 7.8 | 45° | 710 | 4000 | 80 |
| ALUXYSF24Y | 7.8 | 65° | 620 | 2700 | 80 |
| ALUXYSF24W | 7.8 | 65° | 660 | 3000 | 80 |
| ALUXYSF24N | 7.8 | 65° | 705 | 4000 | 80 |


+ Finishing codes

| Code | Front ring colour | Cone colour |
|------|-------------------|-------------|
| WB | White | Black |
| WW | White | White |
| WG | White | Gold |
| BB | Black | Black |
| BW | Black | White |
| BG | Black | Gold |


+ Power supply codes

| Code | Power supply type |
|--------|-------------------|
| ST0700 | Standard - 700 mA |
| DI0700 | DIM1-10 - 700 mA |
| DA0700 | DIM DALI - 700 mA |


21° 7.8W

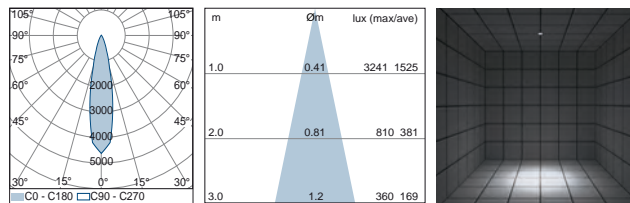


26° 7.8W

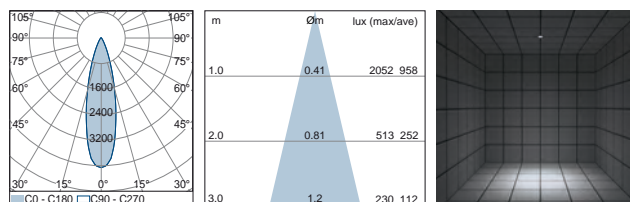

45° 7.8W

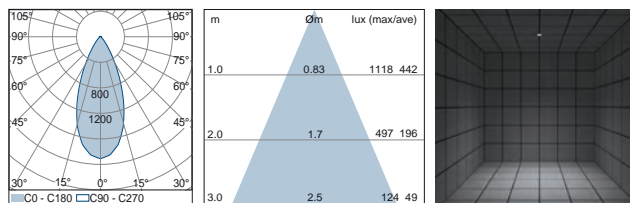


65° 7.8W

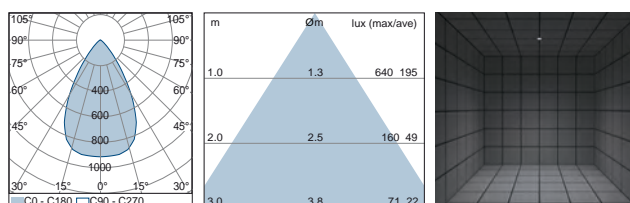

Luxy Small Fix 12W

CE IP65 CLIII

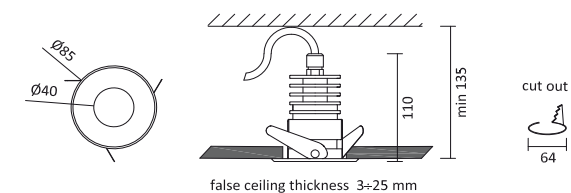

Product codes

| Code | W | Optic | Lm | K | CRI |
|------------|----|-------|------|------|-----|
| ALUXYSF31Y | 12 | 21° | 985 | 2700 | 80 |
| ALUXYSF31W | 12 | 21° | 1045 | 3000 | 80 |
| ALUXYSF31N | 12 | 21° | 1115 | 4000 | 80 |
| ALUXYSF32Y | 12 | 26° | 975 | 2700 | 80 |
| ALUXYSF32W | 12 | 26° | 1035 | 3000 | 80 |
| ALUXYSF32N | 12 | 26° | 1100 | 4000 | 80 |
| ALUXYSF33Y | 12 | 45° | 865 | 2700 | 80 |
| ALUXYSF33W | 12 | 45° | 920 | 3000 | 80 |
| ALUXYSF33N | 12 | 45° | 980 | 4000 | 80 |
| ALUXYSF34Y | 12 | 65° | 855 | 2700 | 80 |
| ALUXYSF34W | 12 | 65° | 910 | 3000 | 80 |
| ALUXYSF34N | 12 | 65° | 970 | 4000 | 80 |


+ Finishing codes

| Code | Front ring colour | Cone colour |
|------|-------------------|-------------|
| WB | White | Black |
| WW | White | White |
| WG | White | Gold |
| BB | Black | Black |
| BW | Black | White |
| BG | Black | Gold |


+ Power supply codes

| Code | Power supply type |
|---------|--------------------|
| ST01050 | Standard - 1050 mA |
| DIO1050 | DIM1-10 - 1050 mA |
| DA01050 | DIM DALI - 1050 mA |


21° 12W

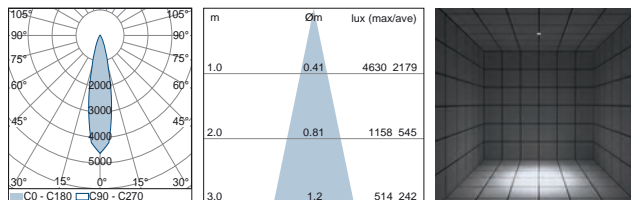

26° 12W

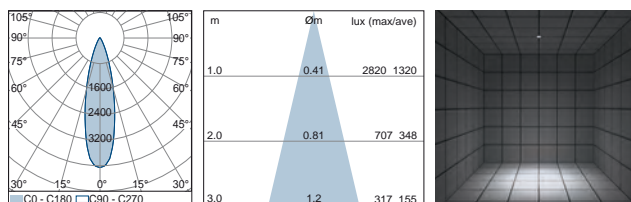

45° 12W

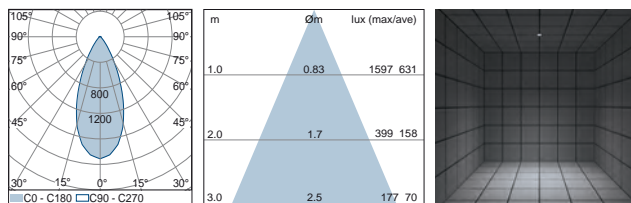

65° 12W

