


Luxy Easy

CE IP20/44 CLIII 



Luxy Easy Round Rotosymmetric



Luxy Easy Round Wallwasher




Luxy Easy Square Symmetric



Luxy Easy Square Wallwasher

Luxy Easy

CE IP20/44 CLIII 

Installation

Ceiling recessed luminaire for indoor installation available in a wide range of optics, lumen output, colour temperature shape and dimension.

Technical description

Body made of laser cutted steel sheet painted with polyester powder.

Dissipation body made of extruded anodized aluminum.

Well calibrated armonic springs.

Extra-clear tempered glass silk-printed in non optical areas.

High quality COB LED.

Electrical features

Remote power supply.

Class III device.

Source type

COB LED

Luminaire wattage

Max. 50W

Colour temperature

2700K - 3000K - 4000K

CRI

80 - on request 90

Beam

15°-30°-55°-75°-85°- WAS1-

WAS2- WAS3 - SYM

Driver

Remote

Input current

Max 1400 mA

Protection class

CLIII

IP rating

IP65

Weight

Max 3 kg


Dimensions

max 250X250 x h 130

Luxy Easy RR220 / Generali insurance offices, Milan




Luxy Easy


CE IP20/44 CLIII 

Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply


ALUEARR082 Luxy Easy Round Rotosymmetric diam. 82mm
Max 12W




ALUEARR100 Luxy Easy Round Rotosymmetric diam. 100mm
Max 17,5W




ALUEARR130 Luxy Easy Round Rotosymmetric diam. 130mm
Max 37,6

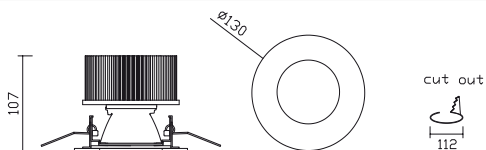


ALUEARR150 Luxy Easy Round Rotosymmetric diam. 150mm

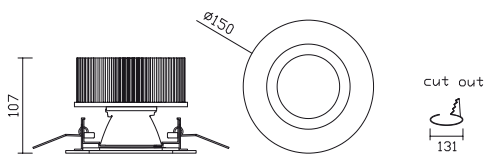


ALUEARR180 Luxy Easy Round Rotosymmetric diam. 180mm

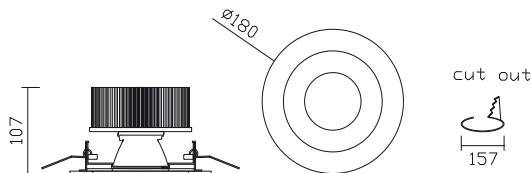


ALUEARR220 Luxy Easy Round Rotosymmetric diam. 220mm

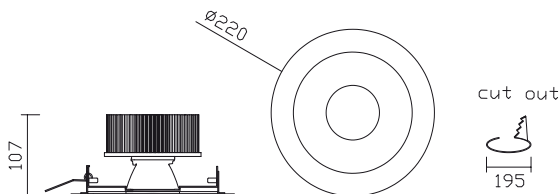


ALUEARR250 Luxy Easy Round Rotosymmetric diam. 250mm

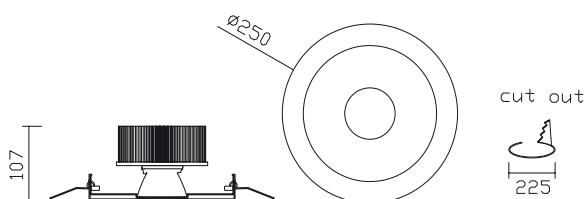


ALUEARR150 Luxy Easy Round Wallwasher diam. 150mm

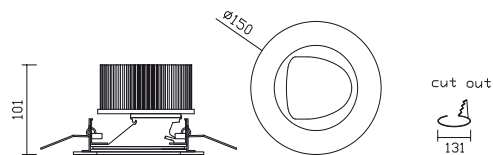


ALUEARR180 Luxy Easy Round Wallwasher diam. 180mm

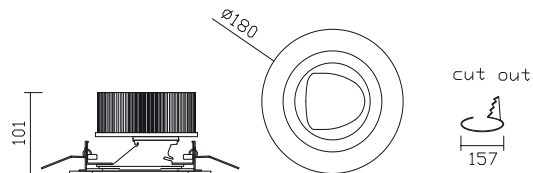


ALUEARR220 Luxy Easy Round Wallwasher diam. 220mm

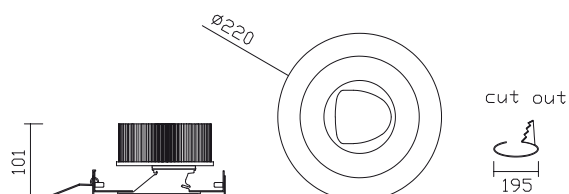

ALUEARR250 Luxy Easy Round Wallwasher diam. 250mm

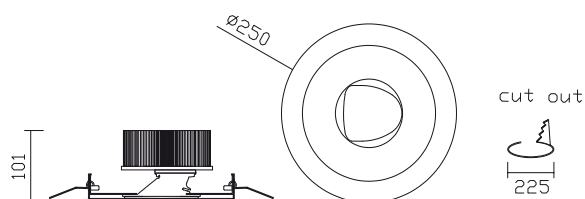


Luxy Easy




Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply


ALUEASS082 Luxt Easy Square Symmetric diam. 82mm
Max 12W

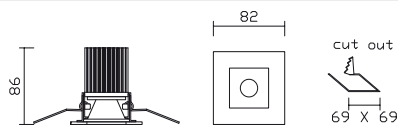


ALUEASS100 Luxt Easy Square Symmetric diam. 100mm
Max 17,5W

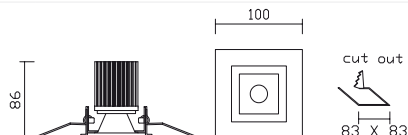


ALUEASS136 Luxt Easy Square Symmetric diam. 136mm
Max 37,6W

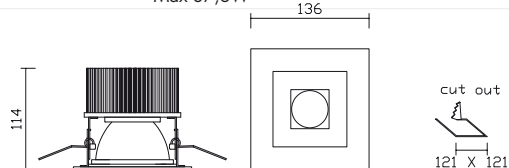


ALUEASS150 Luxt Easy Square Symmetric diam. 150mm

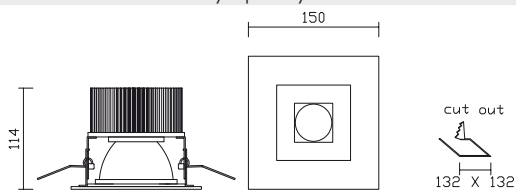


ALUEASS180 Luxt Easy Square Symmetric diam. 180mm

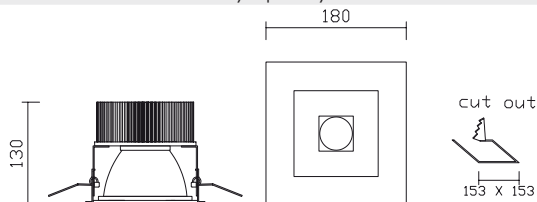


ALUEASS220 Luxt Easy Square Symmetric diam. 220mm

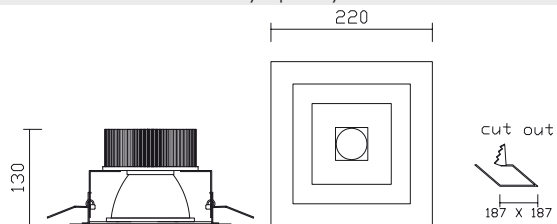


ALUEASS250 Luxt Easy Square Symmetric diam. 250mm

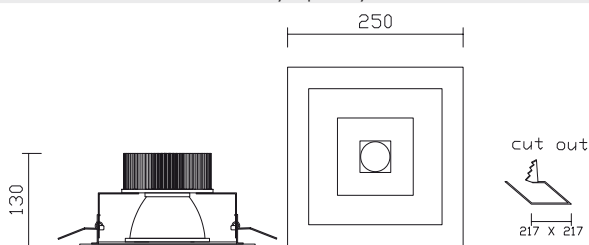


ALUEASW136 Luxt Easy Square Wallwasher diam. 136mm
Max 37,6W

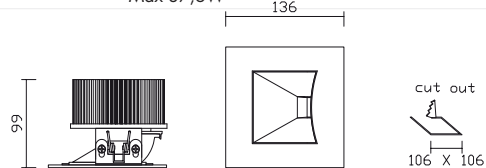


ALUEASW150 Luxt Easy Square Wallwasher diam. 150mm

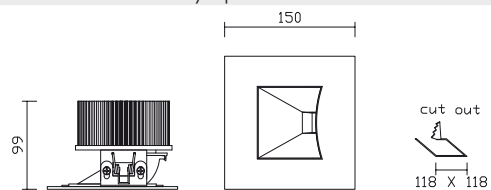


ALUEASW180 Luxt Easy Square Wallwasher diam. 180mm

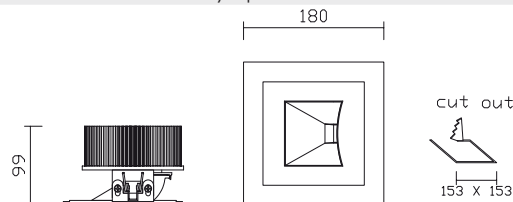


ALUEASW220 Luxt Easy Square Wallwasher diam. 220mm

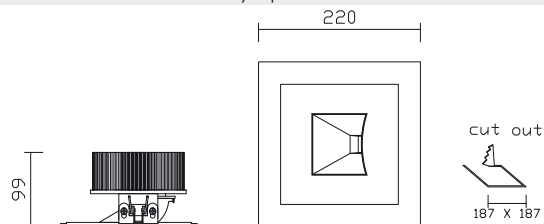

ALUEASW250 Luxt Easy Square Wallwasher diam. 250mm

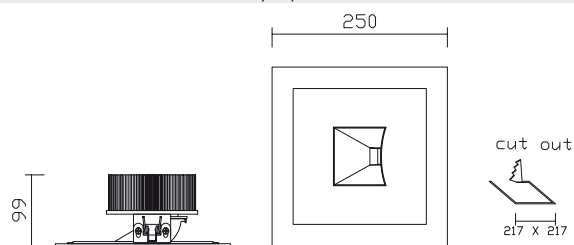


Luxy Easy Round



Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply

Luxy Easy Round & Square 82 and 100

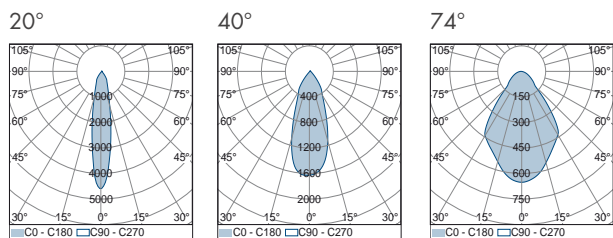


(B) Power/optic/NCC

Code	W	Optic	Lm	K	CRI
.11Y	12	20°	1515	2700	80
.11W	12	20°	1610	3000	80
.11N	12	20°	1650	4000	80
.13Y	12	40°	1430	2700	80
.13W	12	40°	1520	3000	80
.13N	12	40°	1560	4000	80
.14Y	12	74°	1535	2700	80
.14W	12	74°	1630	3000	80
.14N	12	74°	1675	4000	80

Code	W	Optic	Lm	K	CRI
.21Y	17,5	20°	2085	2700	80
.21W	17,5	20°	2215	3000	80
.21N	17,5	20°	2275	4000	80
.23Y	17,5	40°	1970	2700	80
.23W	17,5	40°	2095	3000	80
.23N	17,5	40°	2150	4000	80
.24Y	17,5	74°	2110	2700	80
.24W	17,5	74°	2245	3000	80
.24N	17,5	74°	2300	4000	80


Luxy Easy Round 130, 150, 180, 220, 250

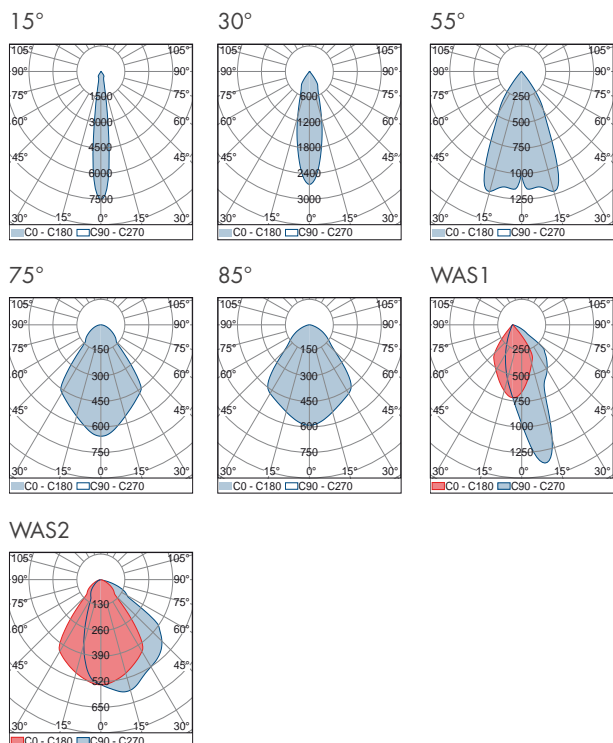

(B) Power/optic/NCC

Code	W	Optic	Lm	K	CRI
.31Y	26	15	3300	2700	80
.31W	26	15	3465	3000	80
.31N	26	15	3640	4000	80
.32Y	26	30	3300	2700	80
.32W	26	30	3465	3000	80
.32N	26	30	3640	4000	80
.33Y	26	55	3230	2700	80
.33W	26	55	3395	3000	80
.33N	26	55	3565	4000	80
.34Y	26	75	3195	2700	80
.34W	26	75	3360	3000	80
.34N	26	75	3525	4000	80
.35Y	26	85	3025	2700	80
.35W	26	85	3175	3000	80
.35N	26	85	3335	4000	80
.36Y	26	WAS1	3195	2700	80
.36W	26	WAS1	3360	3000	80
.36N	26	WAS1	3525	4000	80
.37Y	26	WAS2	3160	2700	80
.37W	26	WAS2	3325	3000	80
.37N	26	WAS2	3490	4000	80

Luxy Easy Round



Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply

Luxy Easy Round 130, 150, 180, 220, 250


Code	W	Optic	Lm	K	CRI
.41Y	33,5	15	4150	2700	80
.41W	33,5	15	3815	3000	80
.41N	33,5	15	4580	4000	80
.42Y	33,5	30	4150	2700	80
.42W	33,5	30	3815	3000	80
.42N	33,5	30	4580	4000	80
.43Y	33,5	55	4065	2700	80
.43W	33,5	55	3735	3000	80
.43N	33,5	55	4485	4000	80
.44Y	33,5	75	4020	2700	80
.44W	33,5	75	3700	3000	80
.44N	33,5	75	4435	4000	80
.45Y	33,5	85	3805	2700	80
.45W	33,5	85	3500	3000	80
.45N	33,5	85	4195	4000	80
.46Y	33,5	WAS1	4020	2700	80
.46W	33,5	WAS1	3700	3000	80
.46N	33,5	WAS1	4435	4000	80
.47Y	33,5	WAS2	3980	2700	80
.47W	33,5	WAS2	3660	3000	80
.47N	33,5	WAS2	4390	4000	80

Code	W	Optic	Lm	K	CRI
.51Y	39,5	15	4730	2700	80
.51W	39,5	15	4390	3000	80
.51N	39,5	15	5215	4000	80
.52Y	39,5	30	4730	2700	80
.52W	39,5	30	4390	3000	80
.52N	39,5	30	5215	4000	80
.53Y	39,5	55	4630	2700	80
.53W	39,5	55	4300	3000	80
.53N	39,5	55	5110	4000	80
.54Y	39,5	75	4580	2700	80
.54W	39,5	75	4255	3000	80
.54N	39,5	75	5055	4000	80
.55Y	39,5	85	4335	2700	80
.55W	39,5	85	4025	3000	80
.55N	39,5	85	4780	4000	80
.56Y	39,5	WAS1	4580	2700	80
.56W	39,5	WAS1	4255	3000	80
.56N	39,5	WAS1	5055	4000	80
.57Y	39,5	WAS2	4535	2700	80
.57W	39,5	WAS2	4210	3000	80
.57N	39,5	WAS2	5000	4000	80

Code	W	Optic	Lm	K	CRI
.61Y	44,5	15	5540	2700	80
.61W	44,5	15	5005	3000	80
.61N	44,5	15	6110	4000	80
.62Y	44,5	30	5540	2700	80
.62W	44,5	30	5005	3000	80
.62N	44,5	30	6110	4000	80
.63Y	44,5	55	5425	2700	80
.63W	44,5	55	4900	3000	80
.63N	44,5	55	5980	4000	80
.64Y	44,5	75	5370	2700	80
.64W	44,5	75	4850	3000	80
.64N	44,5	75	5920	4000	80
.65Y	44,5	85	5075	2700	80
.65W	44,5	85	4585	3000	80
.65N	44,5	85	5600	4000	80
.66Y	44,5	WAS1	5370	2700	80
.66W	44,5	WAS1	4850	3000	80
.66N	44,5	WAS1	5920	4000	80
.67Y	44,5	WAS2	5310	2700	80
.67W	44,5	WAS2	4795	3000	80
.67N	44,5	WAS2	5855	4000	80

Code	W	Optic	Lm	K	CRI
.71Y	52,5	15	6300	2700	80
.71W	52,5	15	6620	3000	80
.71N	52,5	15	6950	4000	80
.72Y	52,5	30	6300	2700	80
.72W	52,5	30	6620	3000	80
.72N	52,5	30	6950	4000	80
.73Y	52,5	55	6170	2700	80
.73W	52,5	55	6485	3000	80
.73N	52,5	55	6805	4000	80
.74Y	52,5	75	6105	2700	80
.74W	52,5	75	6415	3000	80
.74N	52,5	75	6735	4000	80
.75Y	52,5	85	5775	2700	80
.75W	52,5	85	6070	3000	80
.75N	52,5	85	6370	4000	80
.76Y	52,5	WAS1	6105	2700	80
.76W	52,5	WAS1	6415	3000	80
.76N	52,5	WAS1	6735	4000	80
.77Y	52,5	WAS2	6040	2700	80
.77W	52,5	WAS2	6345	3000	80
.77N	52,5	WAS2	6665	4000	80


Luxy Easy Round




Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply

Luxy Easy Square 130, 150, 180, 220, 250

Symmetric



WAS3



(B) Power/optic/NCC

Code	W	Optic	Lm	K	CRI
.38Y	26	SYMM	3335	2700	80
.38W	26	SYMM	3505	3000	80
.38N	26	SYMM	3680	4000	80
.39Y	26	WAS3	3230	2700	80
.39W	26	WAS3	3395	3000	80
.39N	26	WAS3	3565	4000	80


Code	W	Optic	Lm	K	CRI
.48Y	33,5	SYMM	4195	2700	80
.48W	33,5	SYMM	3860	3000	80
.48N	33,5	SYMM	4630	4000	80
.49Y	33,5	WAS3	4065	2700	80
.49W	33,5	WAS3	3735	3000	80
.49N	33,5	WAS3	4485	4000	80

Code	W	Optic	Lm	K	CRI
.58Y	39,5	SYMM	4785	2700	80
.58W	39,5	SYMM	4440	3000	80
.58N	39,5	SYMM	5275	4000	80
.59Y	39,5	WAS3	4630	2700	80
.59W	39,5	WAS3	4300	3000	80
.59N	39,5	WAS3	5110	4000	80

Code	W	Optic	Lm	K	CRI
.68Y	44,5	SYMM	5600	2700	80
.68W	44,5	SYMM	5060	3000	80
.68N	44,5	SYMM	6180	4000	80
.69Y	44,5	WAS3	5425	2700	80
.69W	44,5	WAS3	4900	3000	80
.69N	44,5	WAS3	5980	4000	80

Code	W	Optic	Lm	K	CRI
.78Y	52,5	SYMM	6370	2700	80
.78W	52,5	SYMM	6695	3000	80
.78N	52,5	SYMM	7030	4000	80
.79Y	52,5	WAS3	6170	2700	80
.79W	52,5	WAS3	6485	3000	80
.79N	52,5	WAS3	6805	4000	80

Luxy Easy Round

CE IP20/44 CLIII 

Code: (A) Product shape/dimension + (B) Power/optic/NCC + (C) IP ratio + (D) Finish + (D) Power Supply

Luxy Easy Round & Square

+ (C) IP ratio

Code	Description
.20G	IP20 with front glass
.20N	IP20 without front glass
.44G	IP44 with front glass

+ (D) Finishing codes

Code	Description
.BP	Black powder painted
.WP	White powder painted
.CP	Custom colour powder painted

+ (E) Power supply codes

Code	Power supply type
.ST1	Standard CL I
.ST2	Standard CL II
.DI1	DIM1-10 CL I
.DI2	DIM1-10 CL II
.DA2	DIM DALI CL II



Luxy Easy RR250 / Lombard privat banking, Milan