

TASSONI
— & —
PESENTI

Biagio



Biagio Range

CE IP66 CLI/II 

General informations

Residential lighting system, suitable for gardens, pedestrian paths, public areas, squares, streets, car parks; wide availability of optics, LED modules and geometric configuration:

- with square section 80X80mm, 100X100mm or rectangular 100X150mm
- with single or double outreach and personalized configurations can be requested, zed with multiple outreach
- with horizontal or inclined reach at 15° or 30°mm or alternatively mm.
- outreach length of
- at a height of the upper outreach of 4500mm, 6000mm or 7500mm and of the possible secondary outreach respectively at 3500mm, mm or mm, different heights can be configured
- single or double stem.

Ground fixing system by driving into a plinth or alternatively by means of a base plate and anchor bolts.

Technical description

Body and arm in stainless steel with dimensions 80X80 and thickness of 2 or 3 mm.

Electrical accessory compartment located in the wiring compartment at the base of the pole.

Finishing of all the metal parts by painting with polyester powders and on request with marine-grade certification with preventive surface treatments.

The LED module is positioned inside the inclined arm.

Front closure with transparent silk-screened screen.

Anti-aging silicone seals.

Electrical characteristics

High quality Power LEDs.



Integrated standard or dimmable 1-10V, DALI or programmable power supply.

Class I or II luminaire with earthing terminal on the pole.

Optica characteristics

Biagio is provided with a wide range of optics: rotosymmetric, symmetric, asymmetric, street, for pedestrian crossing optics, with standard configuration or with low glaring additional system.

Source Type	Power LED
Wattage for each arm	32W - 48W - 64W - 80W - 96W - 112W - 128W
Colour temperature	2700K - 3000K - 4000K
CRI	80
Beam	Rotosymmetric, symmetric, asymmetric, street, for pedestrian crossing optics, with standard configuration or with low glaring additional system.
Driver	Integrated
Input	220-240V 50/60 Hz
Protection class	CLI/II
IP rating	IP66



Low glaring optic system



Università Pontificia, Naples - Italy



Università Pontificia, Naples - Italy





Mall in Pomezia, Rome - Italy



Mall in Pomezia, Rome - Italy

Biagio - 80x80mm section - 4500mm height - single arm


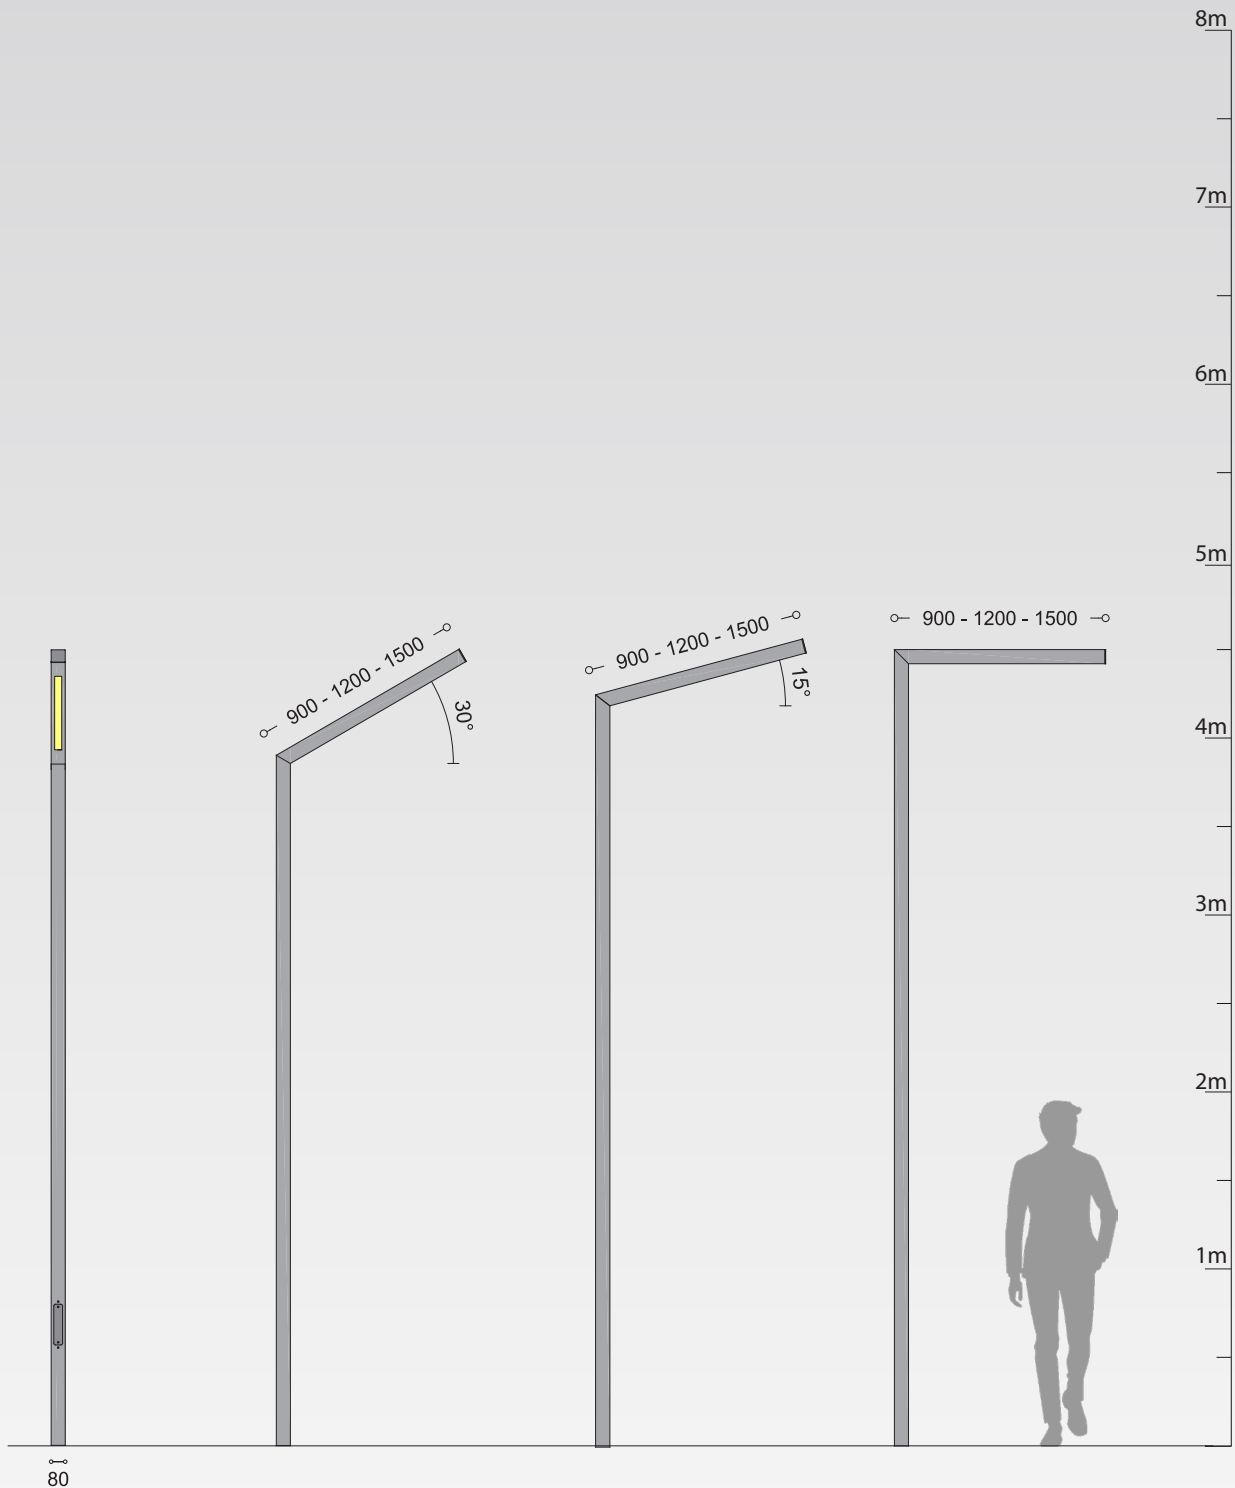


Biagio 8080 4500 S30


Biagio 8080 4500 S15

Biagio 8080 4500 S00


Biagio - 80x80mm section - 4500mm height - double arm

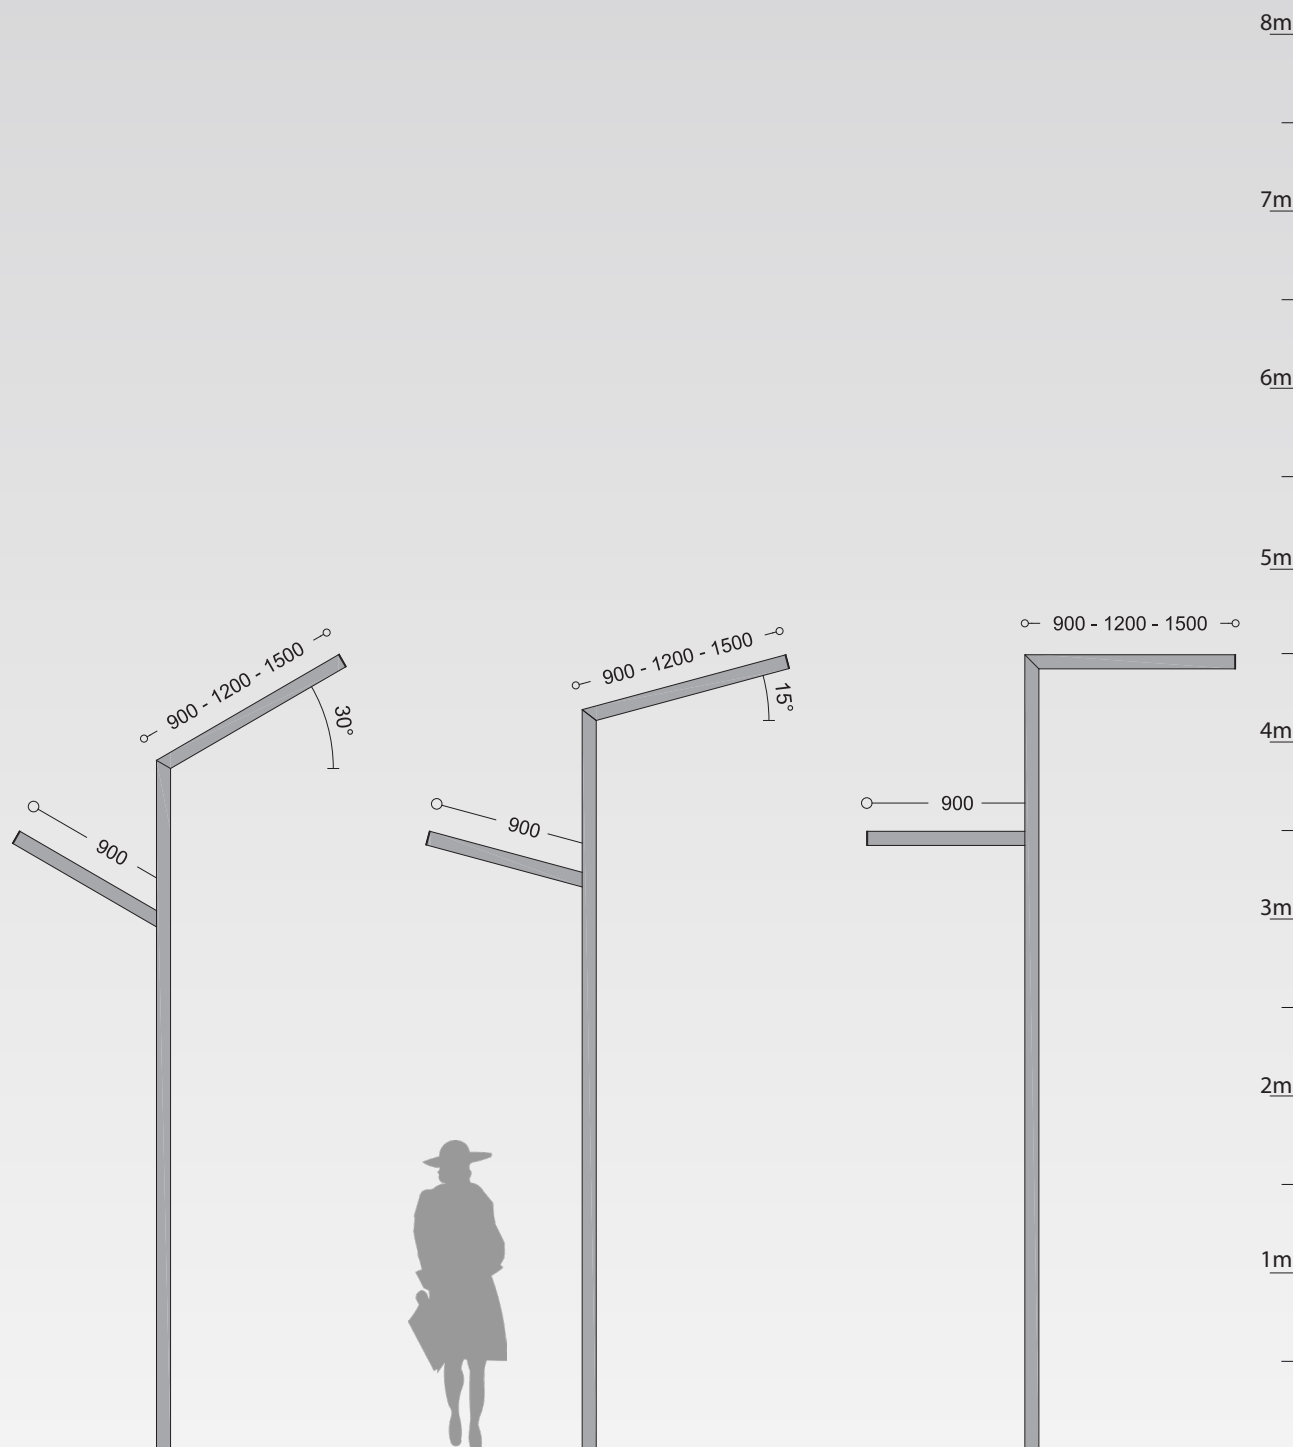

Biagio 8080 4500 D30




Biagio 8080 4500 D15




Biagio 8080 4500 D00

Biagio - 80x80mm section - 6000mm height - single arm

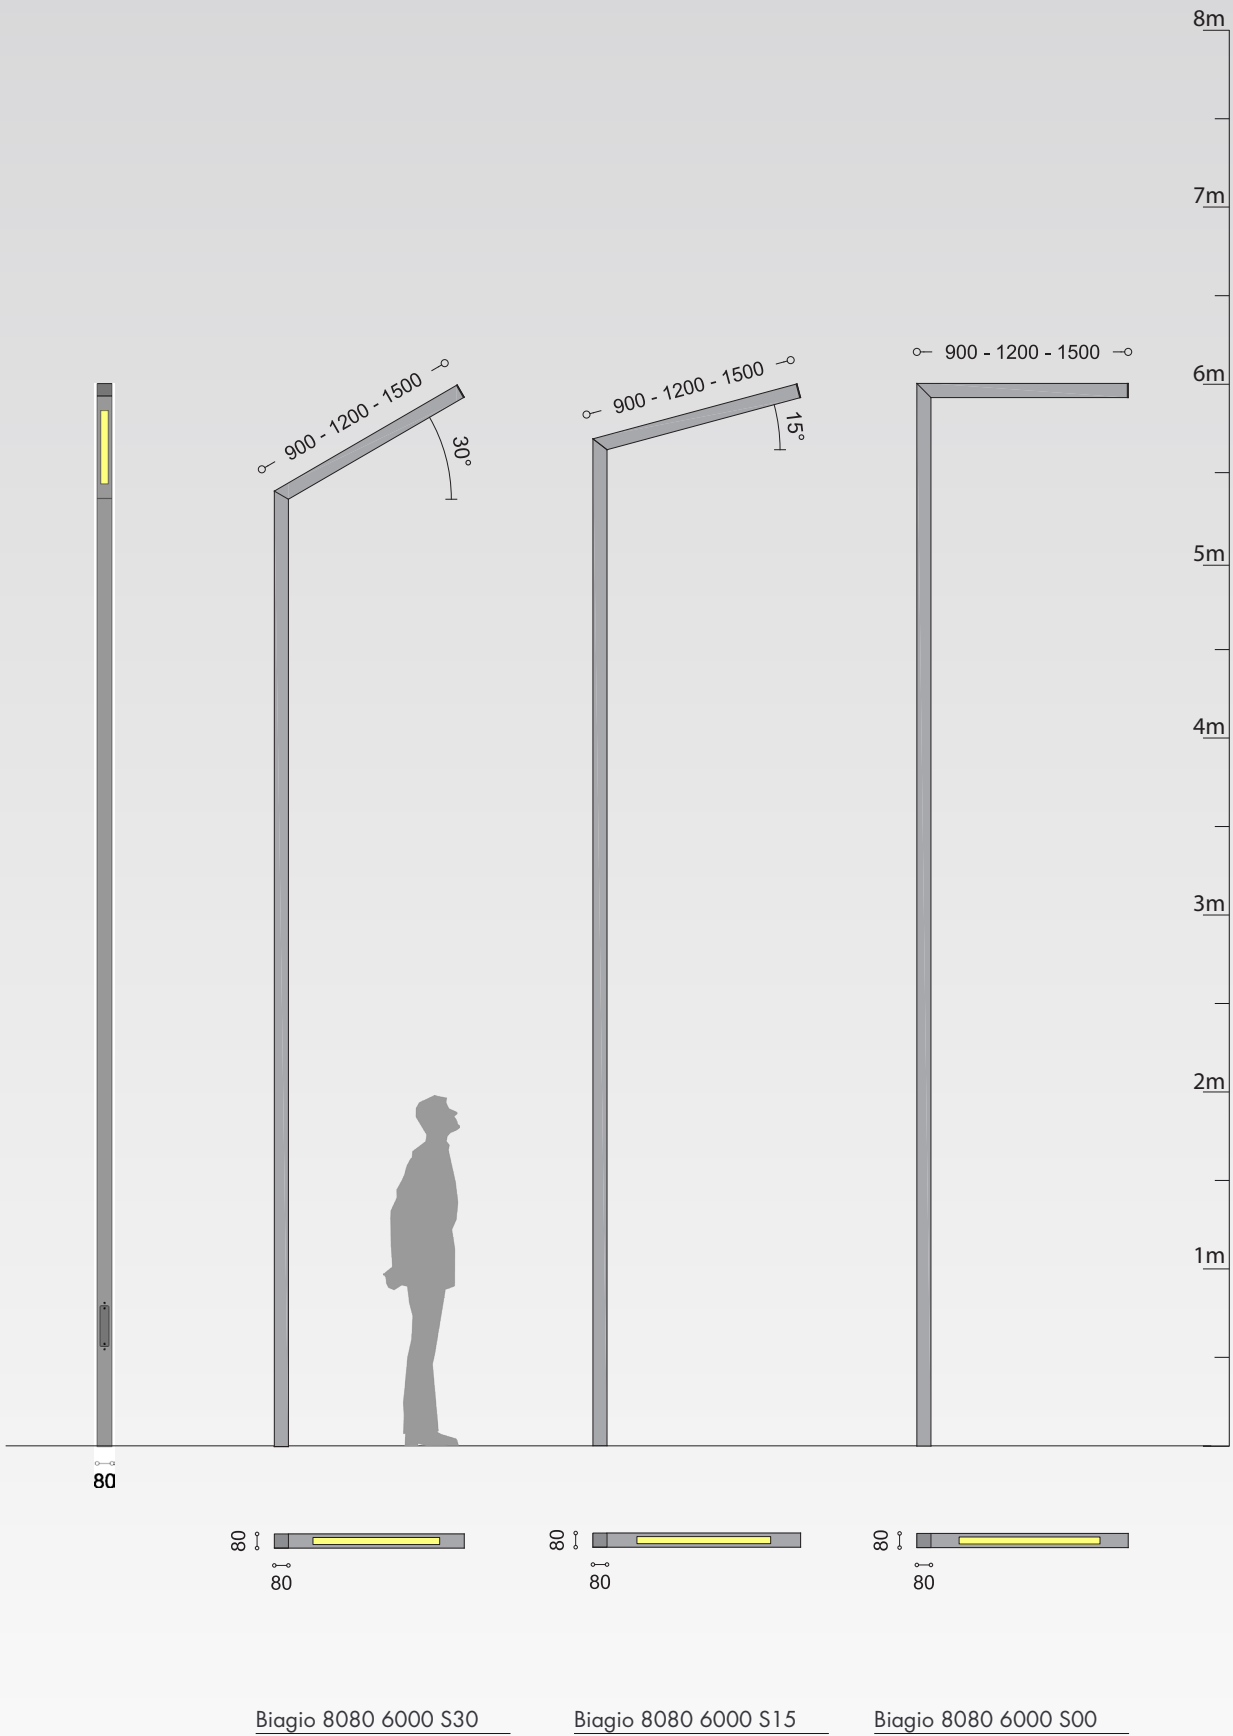

Biagio - 80x80mm section - 6000mm height - double arm

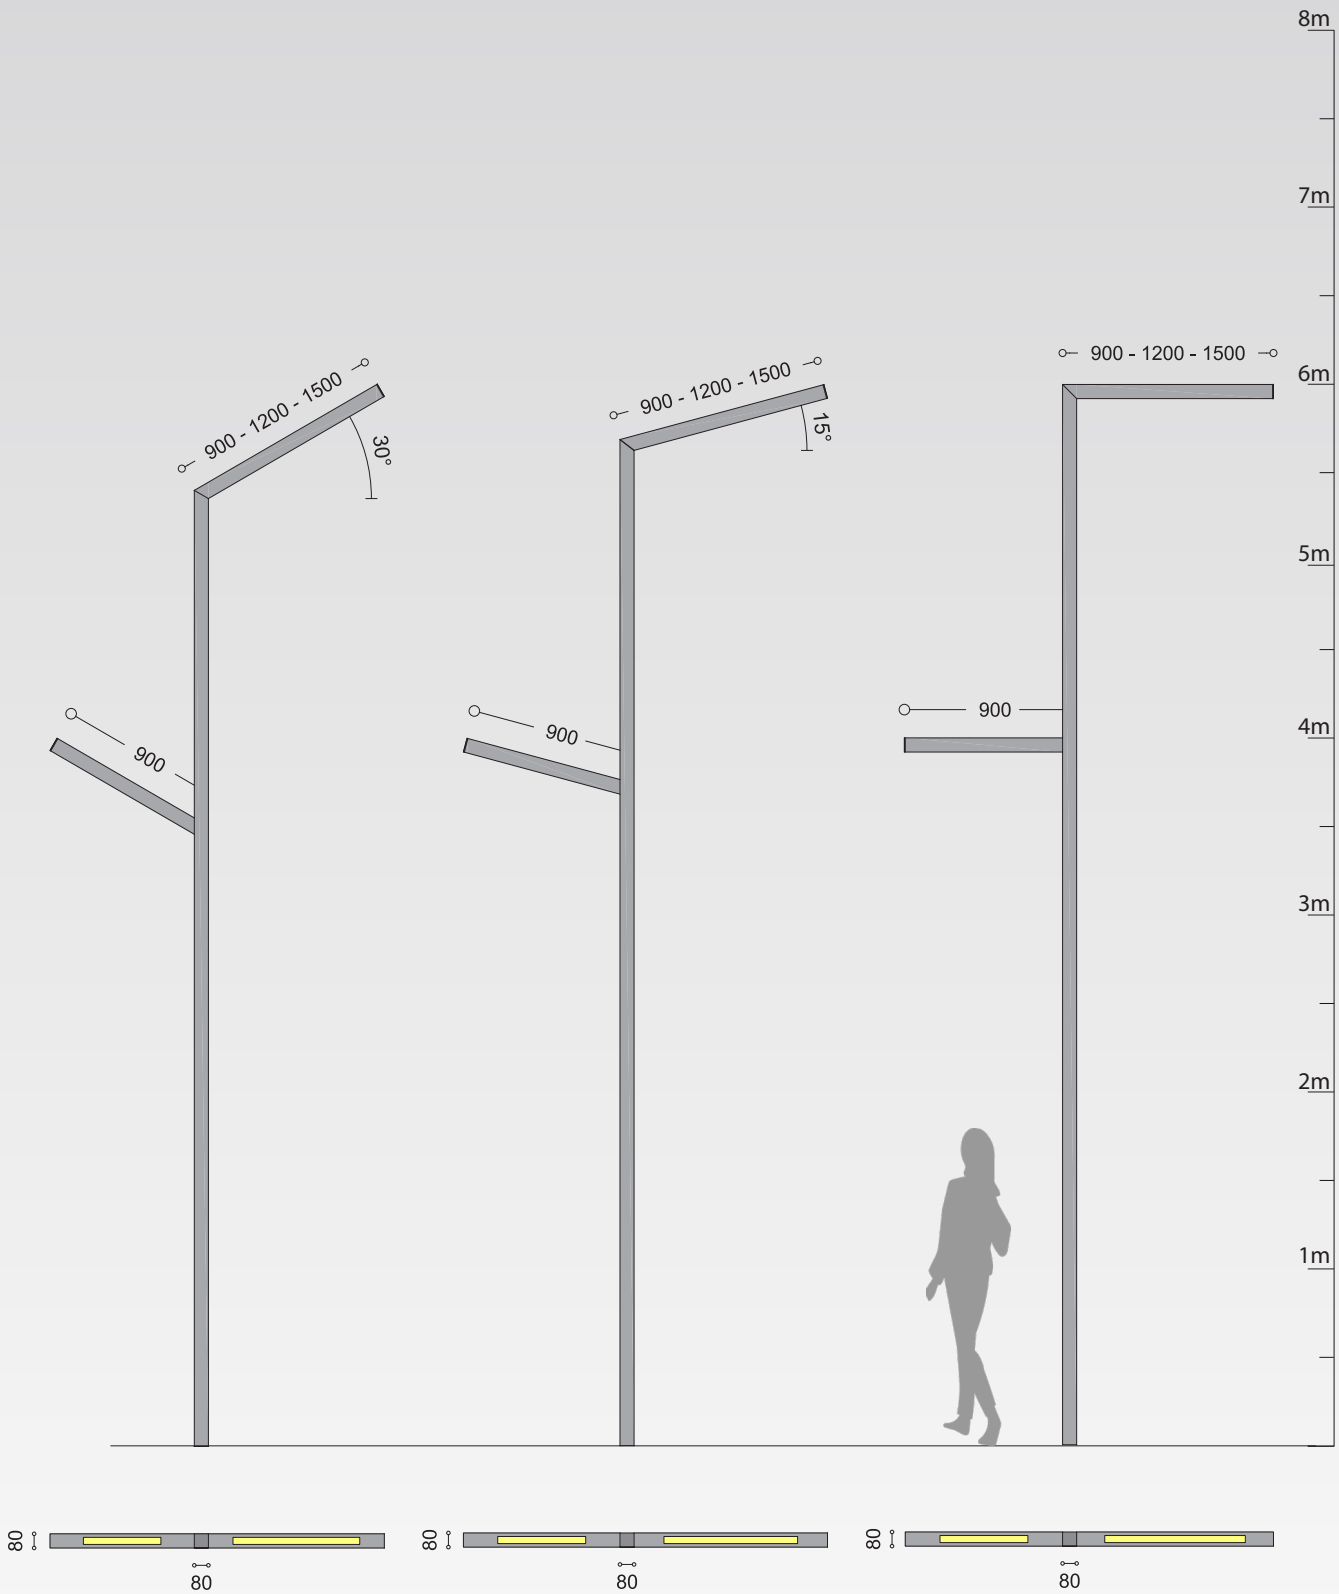


Biagio 8080 6000 D30

Biagio 8080 6000 D15

Biagio 8080 6000 D00


Biagio - 100x100mm section - 4500mm height - single arm

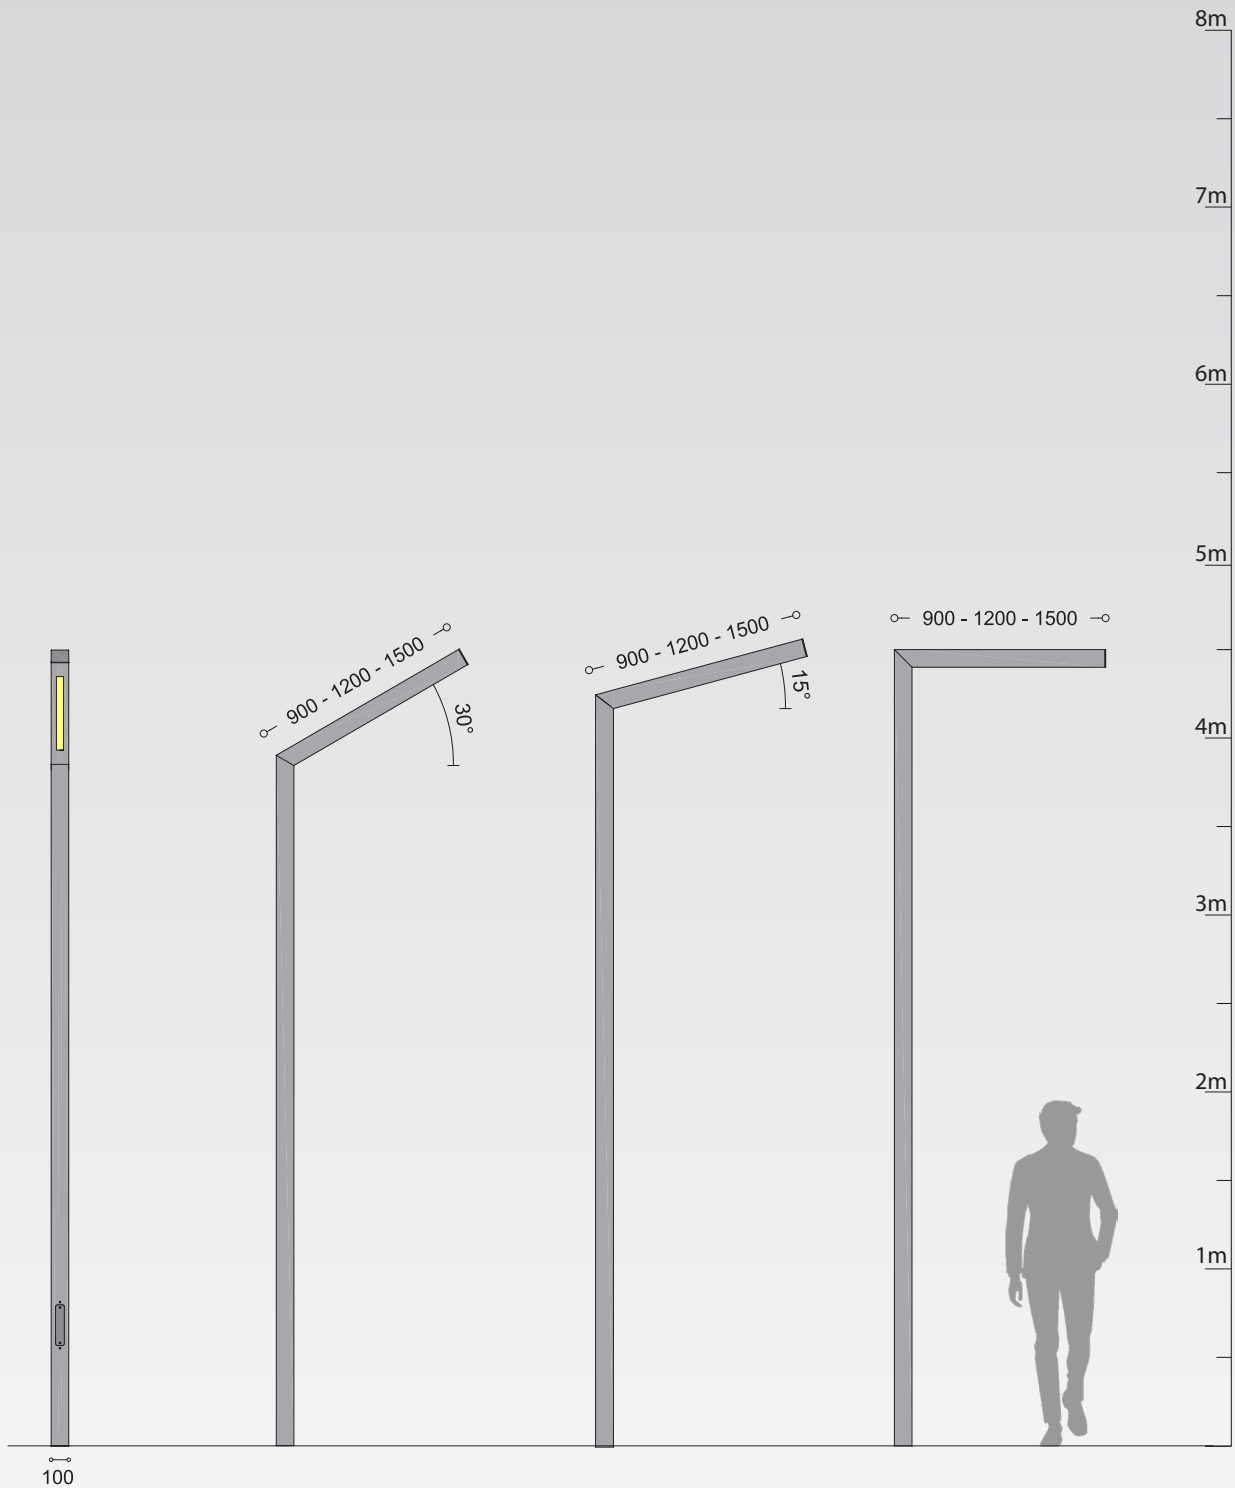

Biagio 100100 4500 S30



Biagio 100100 4500 S15



Biagio 100100 4500 S00

Biagio - 100x100mm section - 4500mm height - double arm




Biagio 100100 4500 D30


Biagio 100100 4500 D15

Biagio 100100 4500 D00

Biagio - 100x100mm section - 6000mm height - single arm

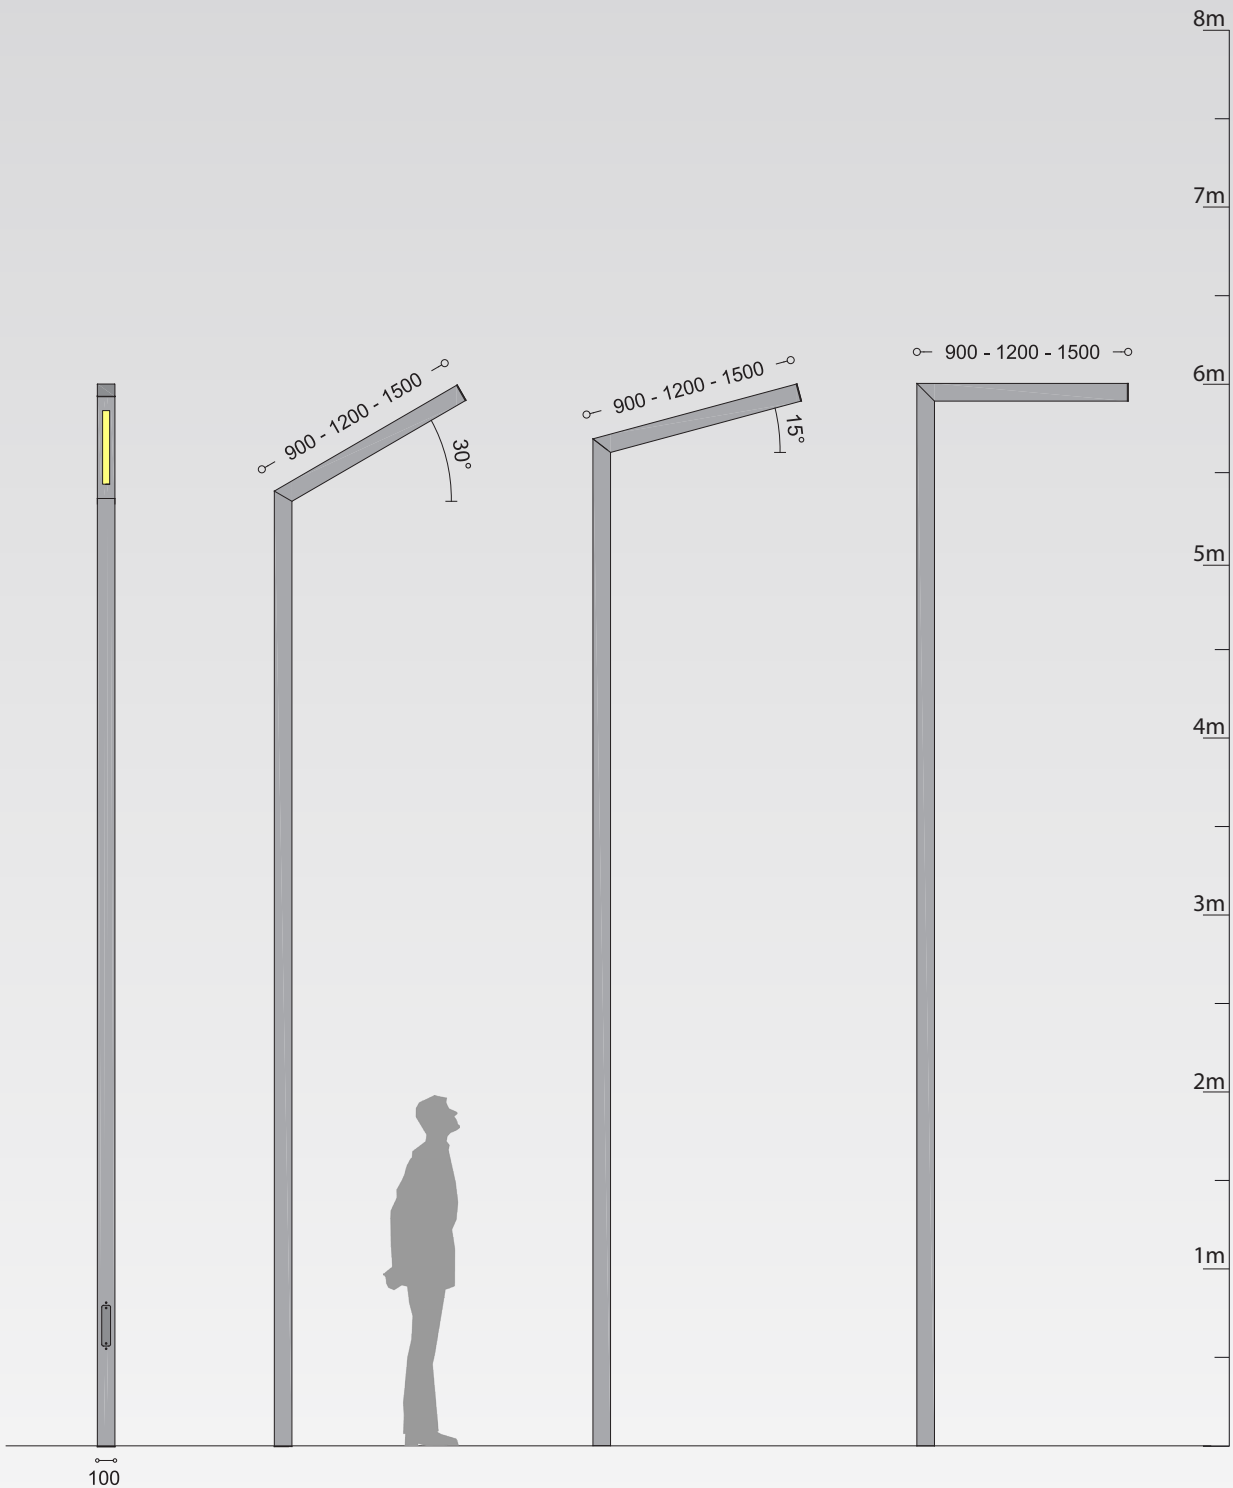

Biagio 100100 6000 S30




Biagio 100100 6000 S15



Biagio 100100 6000 S00

Biagio - 100x100mm section - 6000mm height - double arm

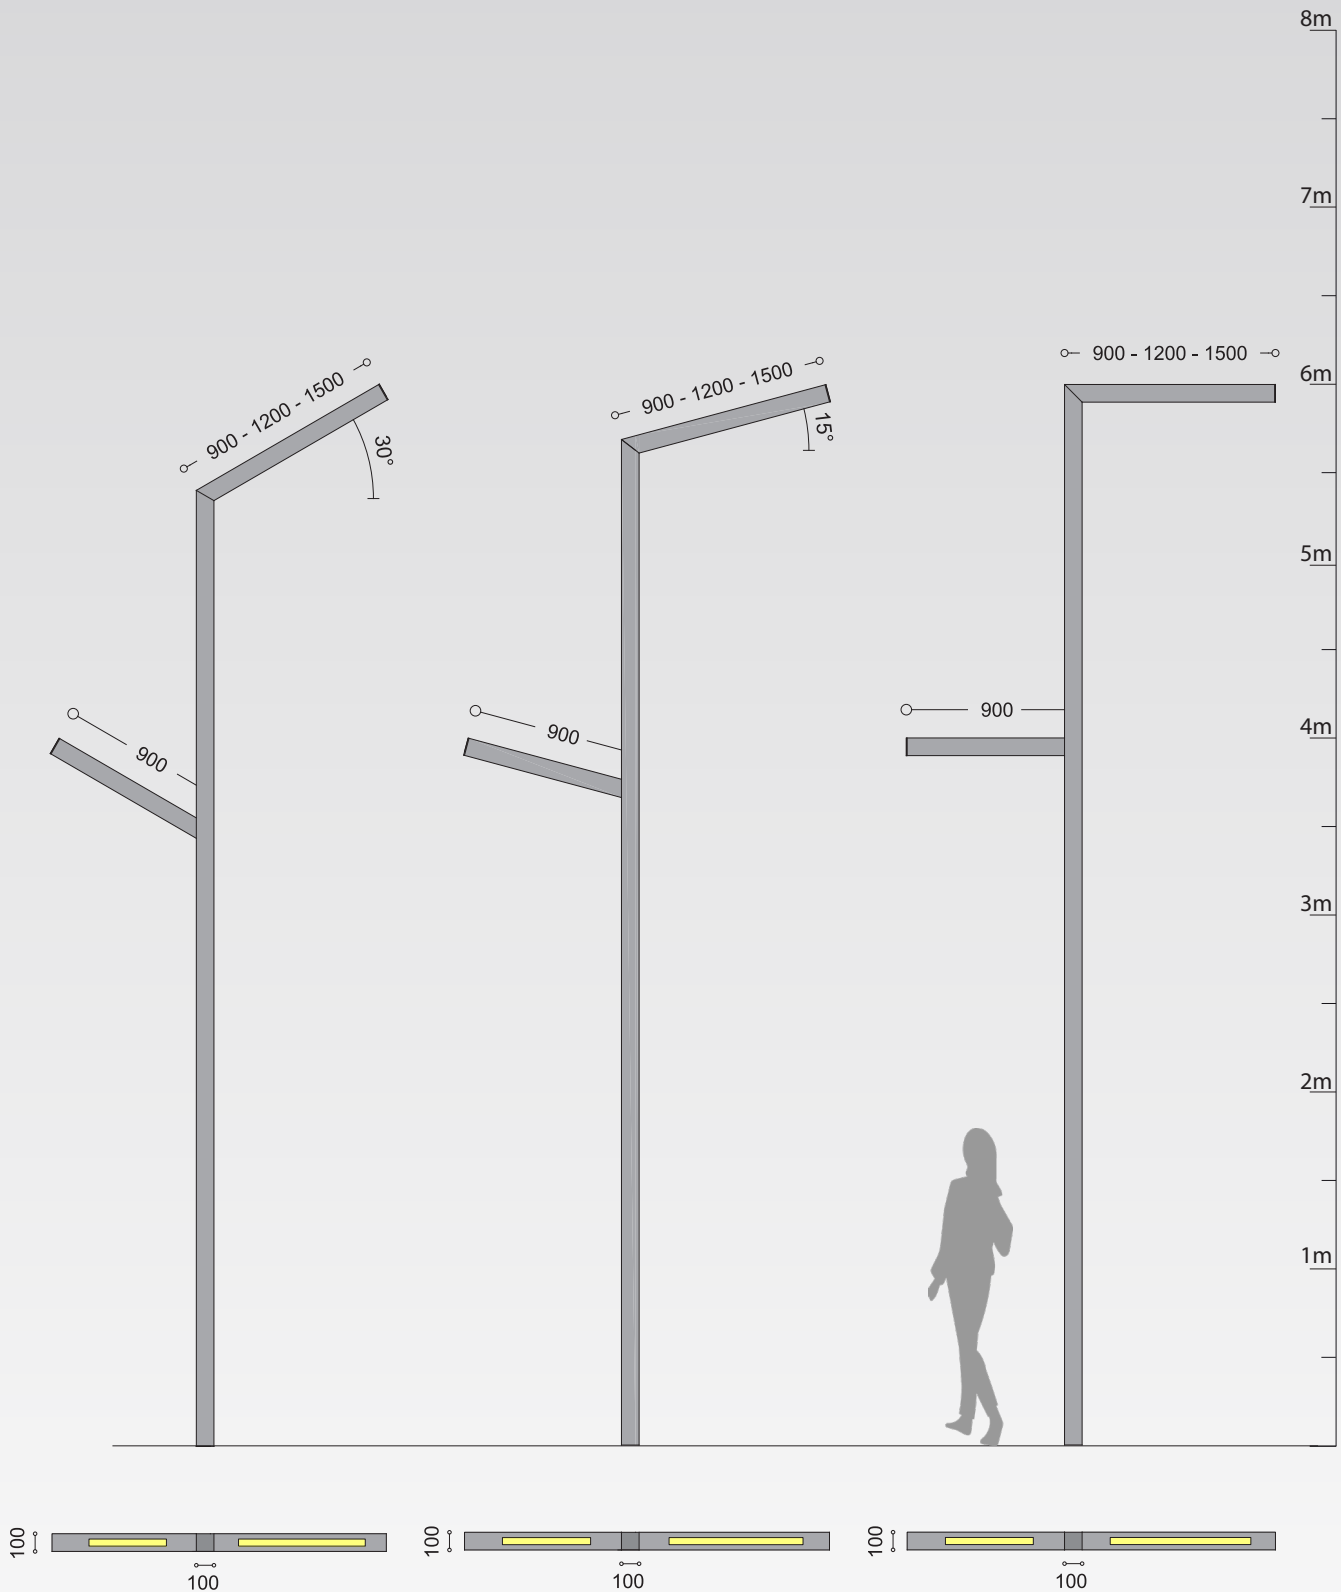


Biagio 100100 6000 D30

Biagio 100100 6000 D15

Biagio 100100 6000 D00

Biagio - 100x100mm section - 7500mm height - single arm

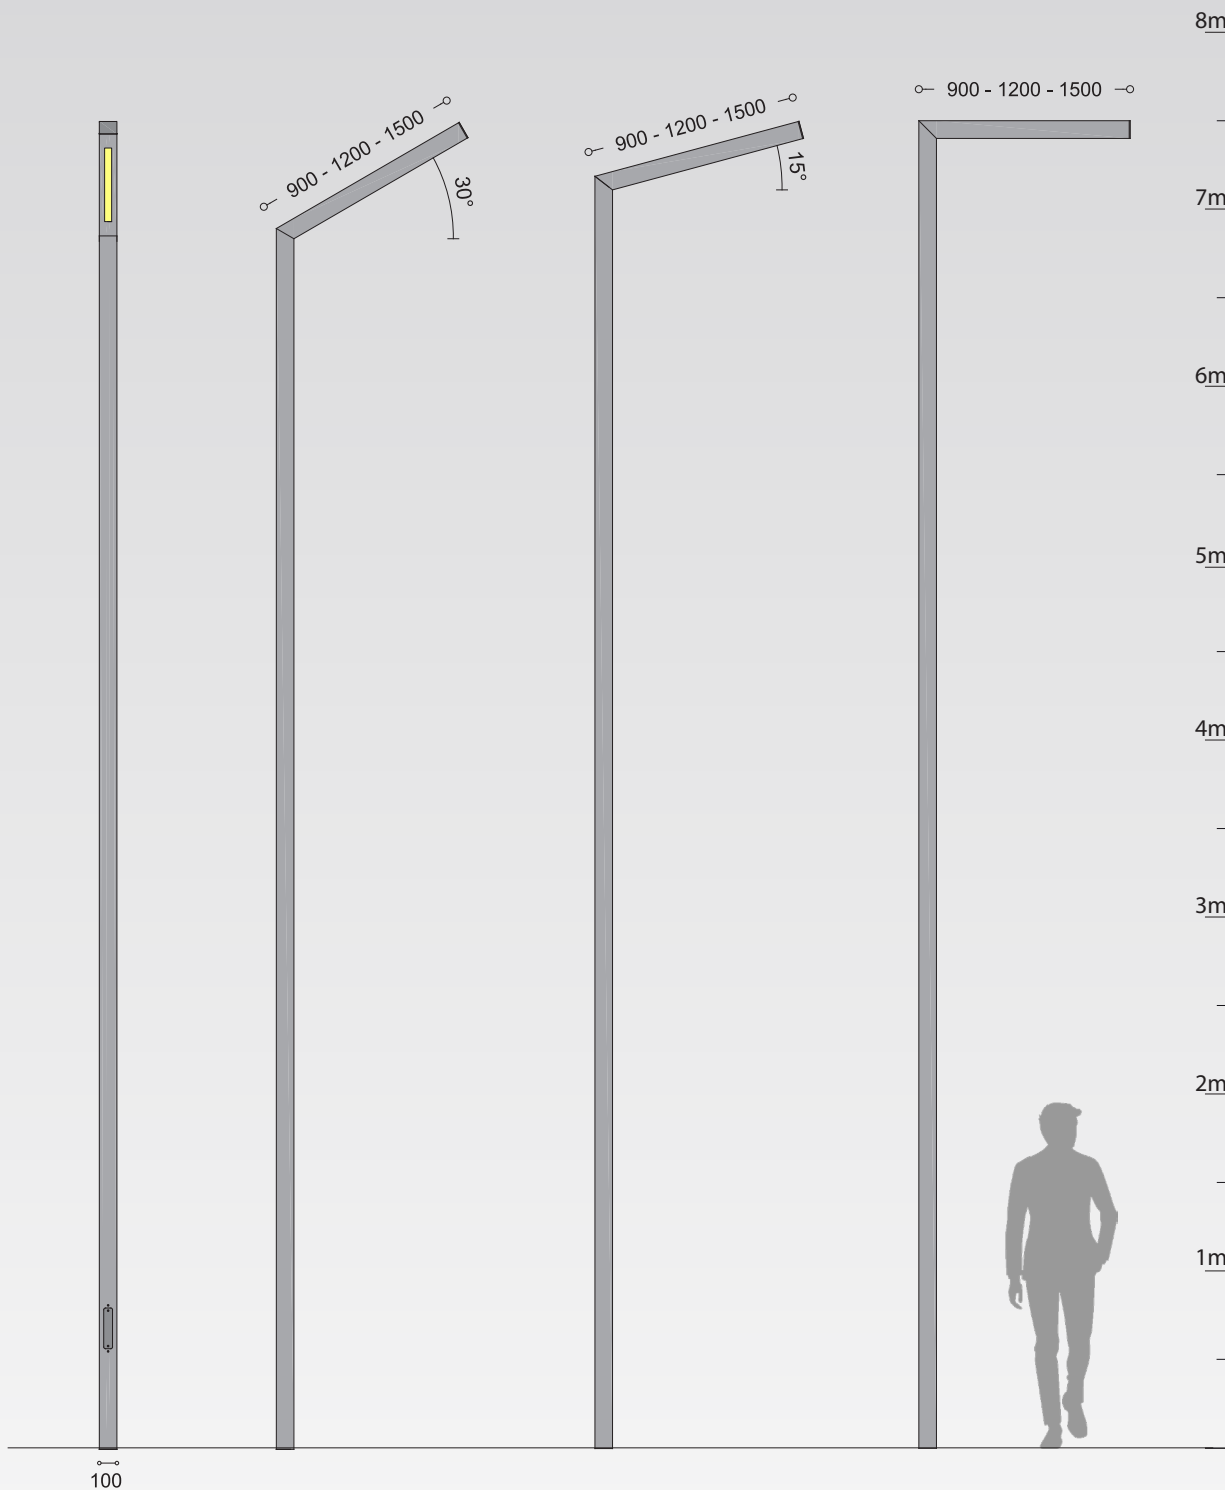

Biagio 100100 7500 S30





Biagio 100100 7500 S15




Biagio 100100 7500 S00


Biagio - 100x100mm section - 7500mm height - double arm

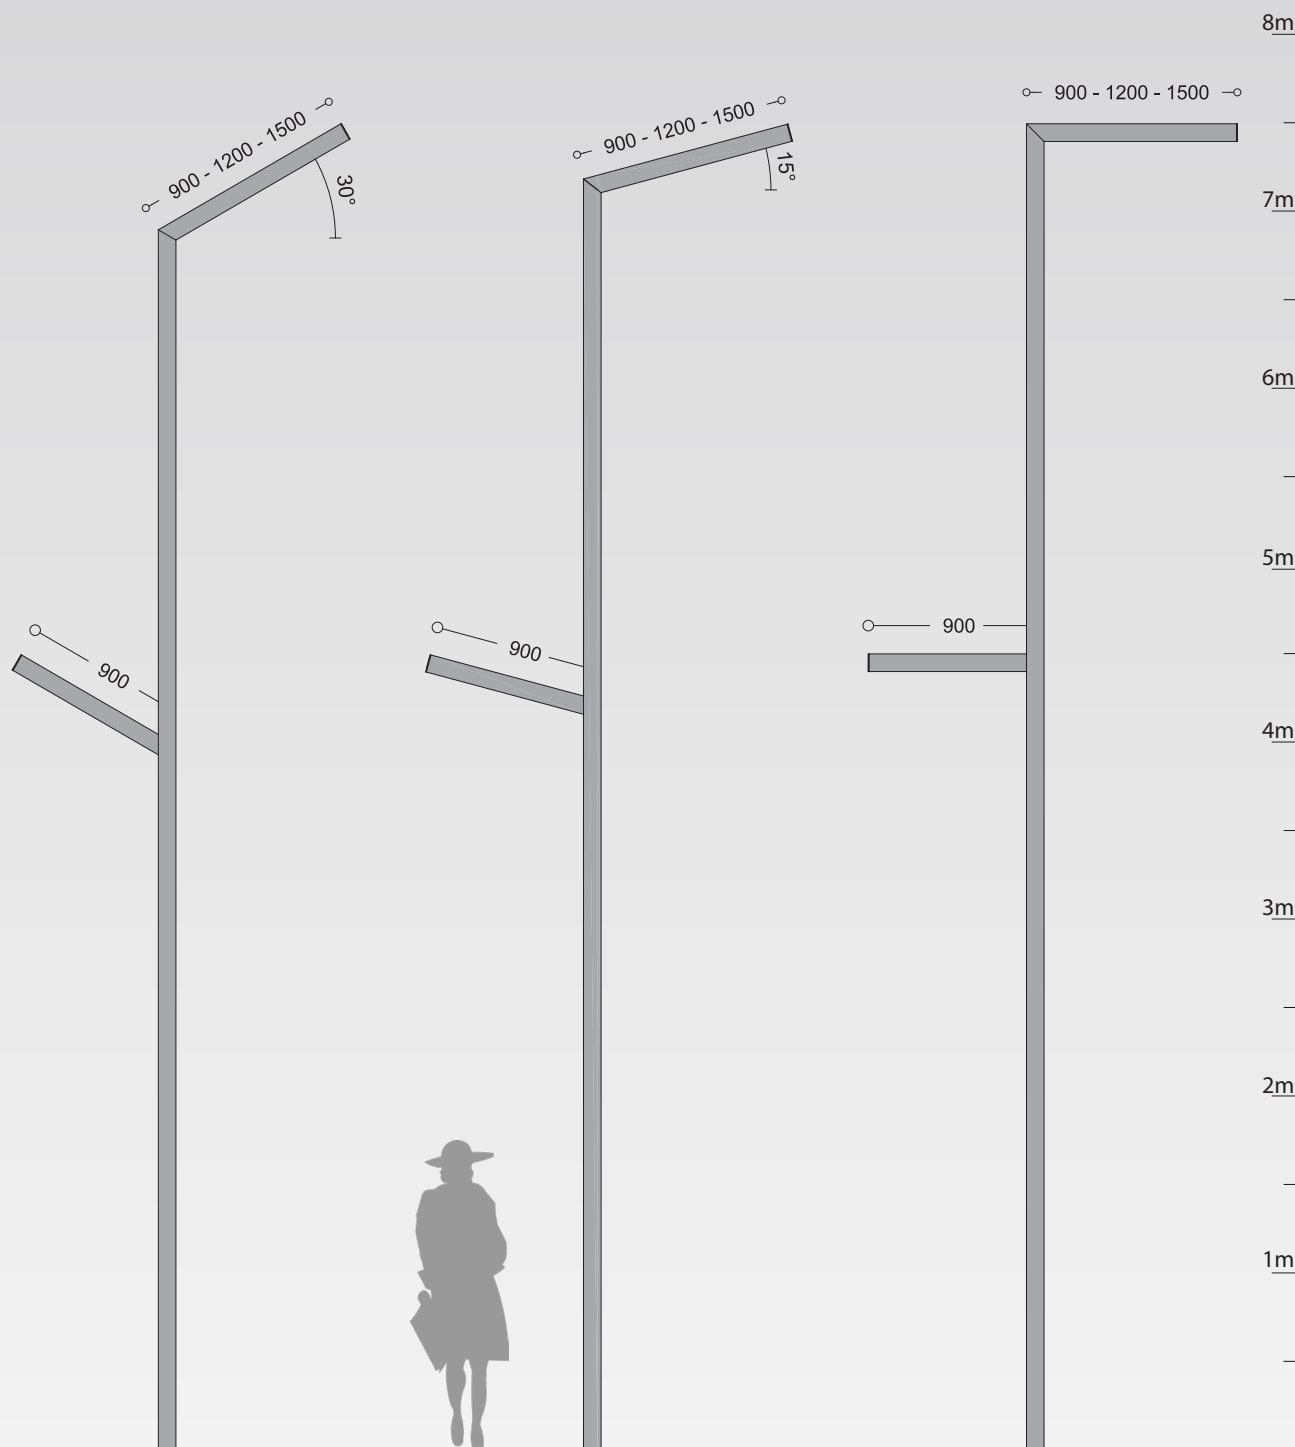

Biagio 100100 7500 D30



Biagio 100100 7500 D15




Biagio 100100 7500 D00



Università Pontificia, Naples - Italy





Università Pontificia, Naples - Italy

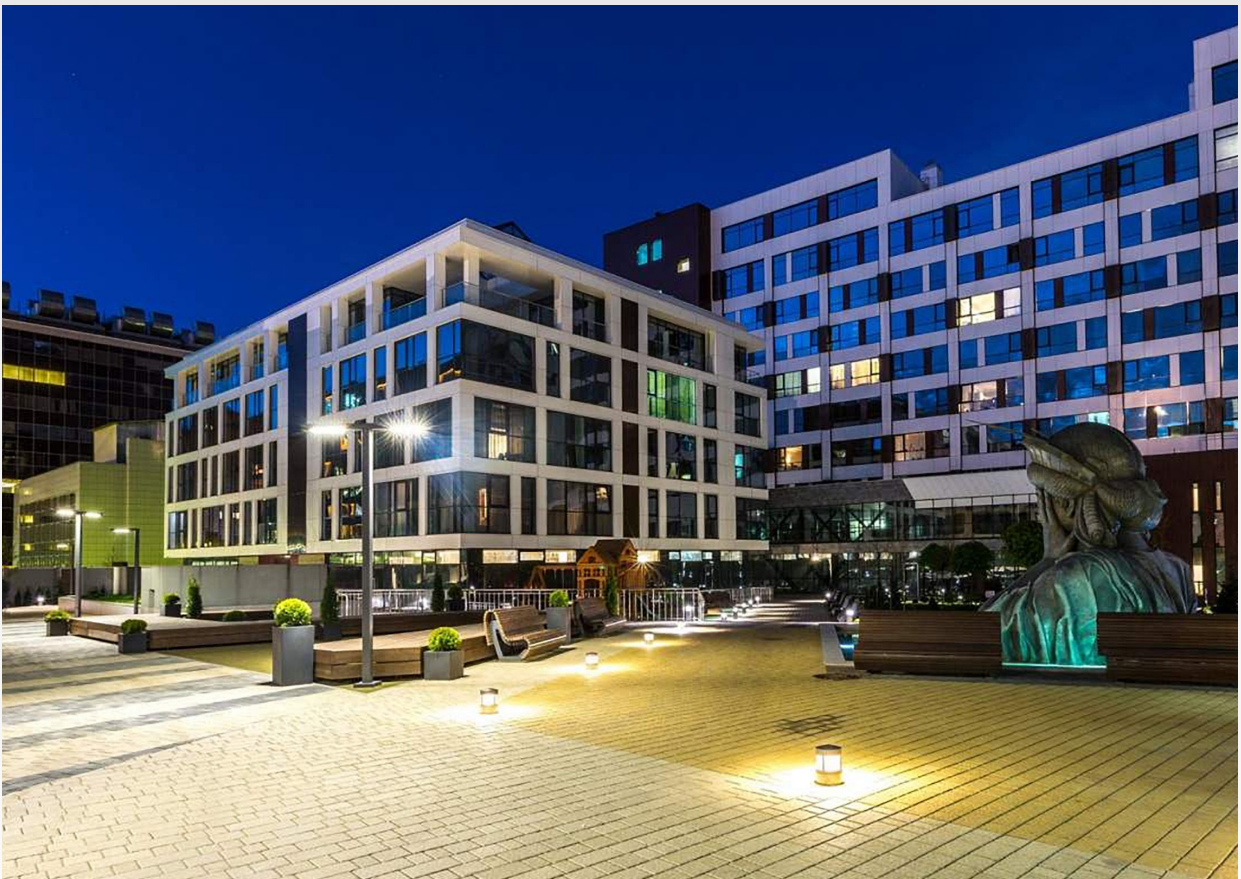


Tribeca district, Moscow - Russia


Biagio - 100x150mm section - 4500mm height - single arm

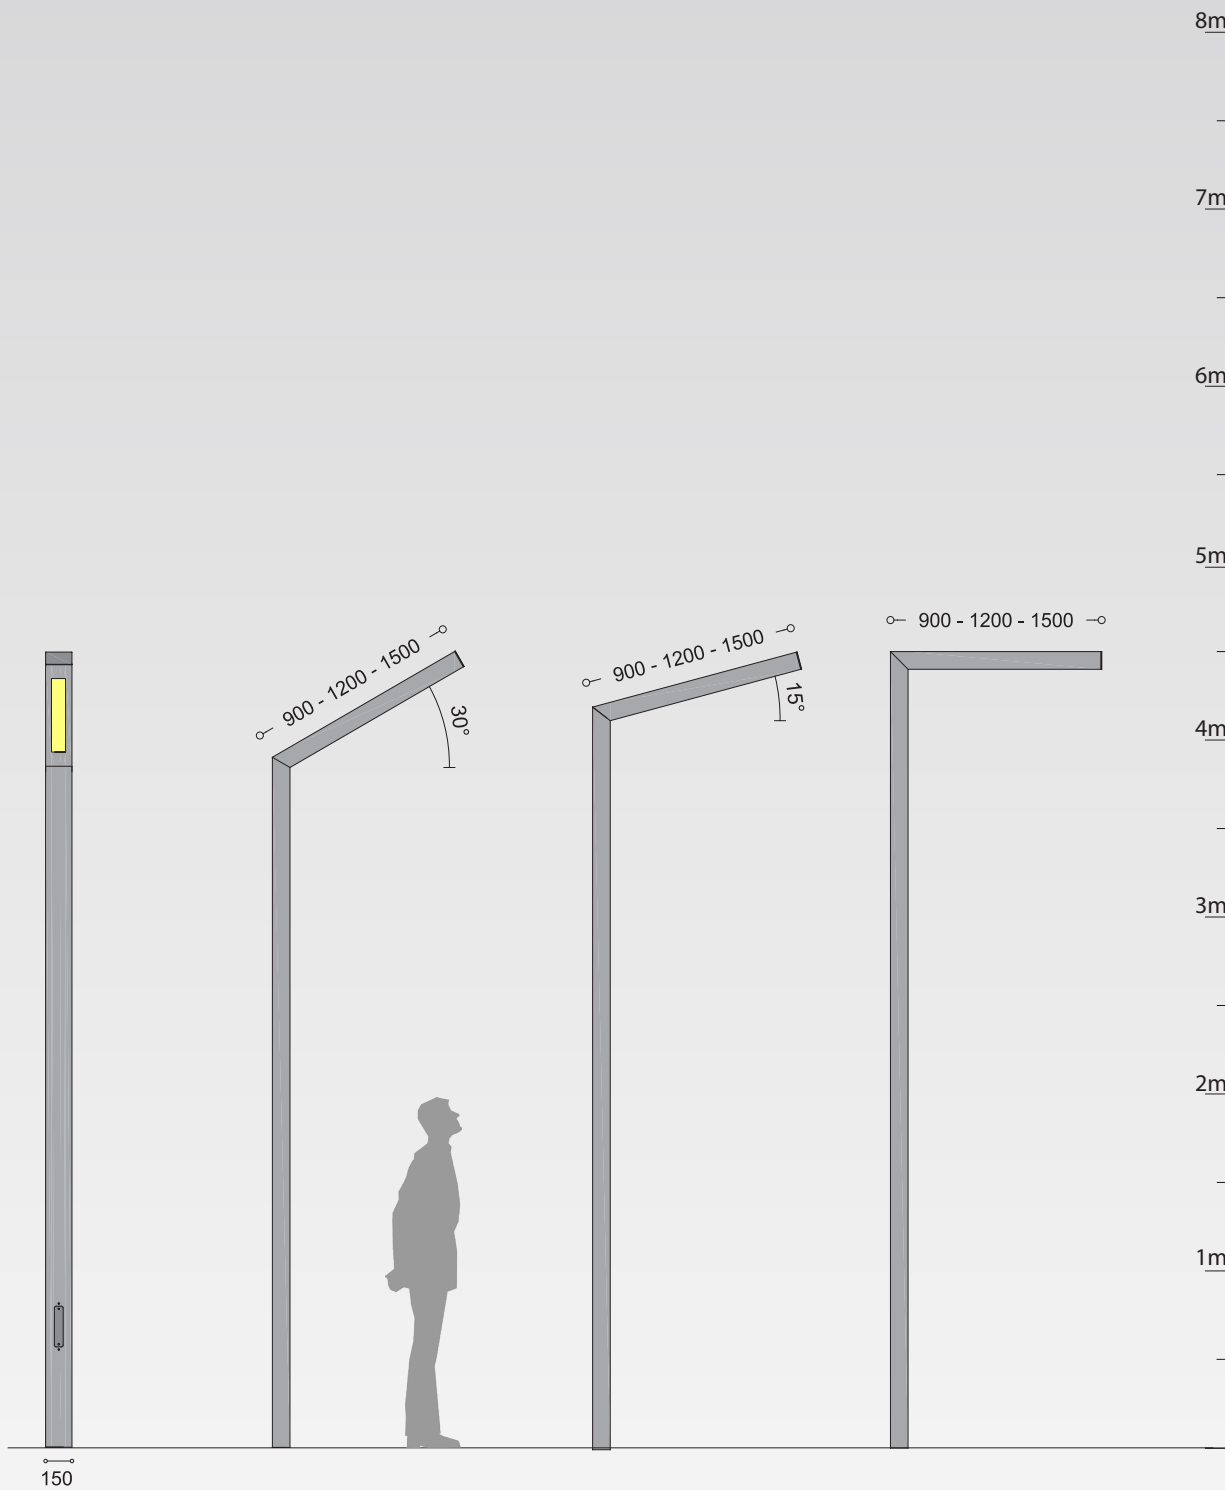

Biagio 100150 4500 S30




Biagio 100150 4500 S15



Biagio 100150 4500 S00

Biagio - 100x150mm section - 4500mm height - double arm


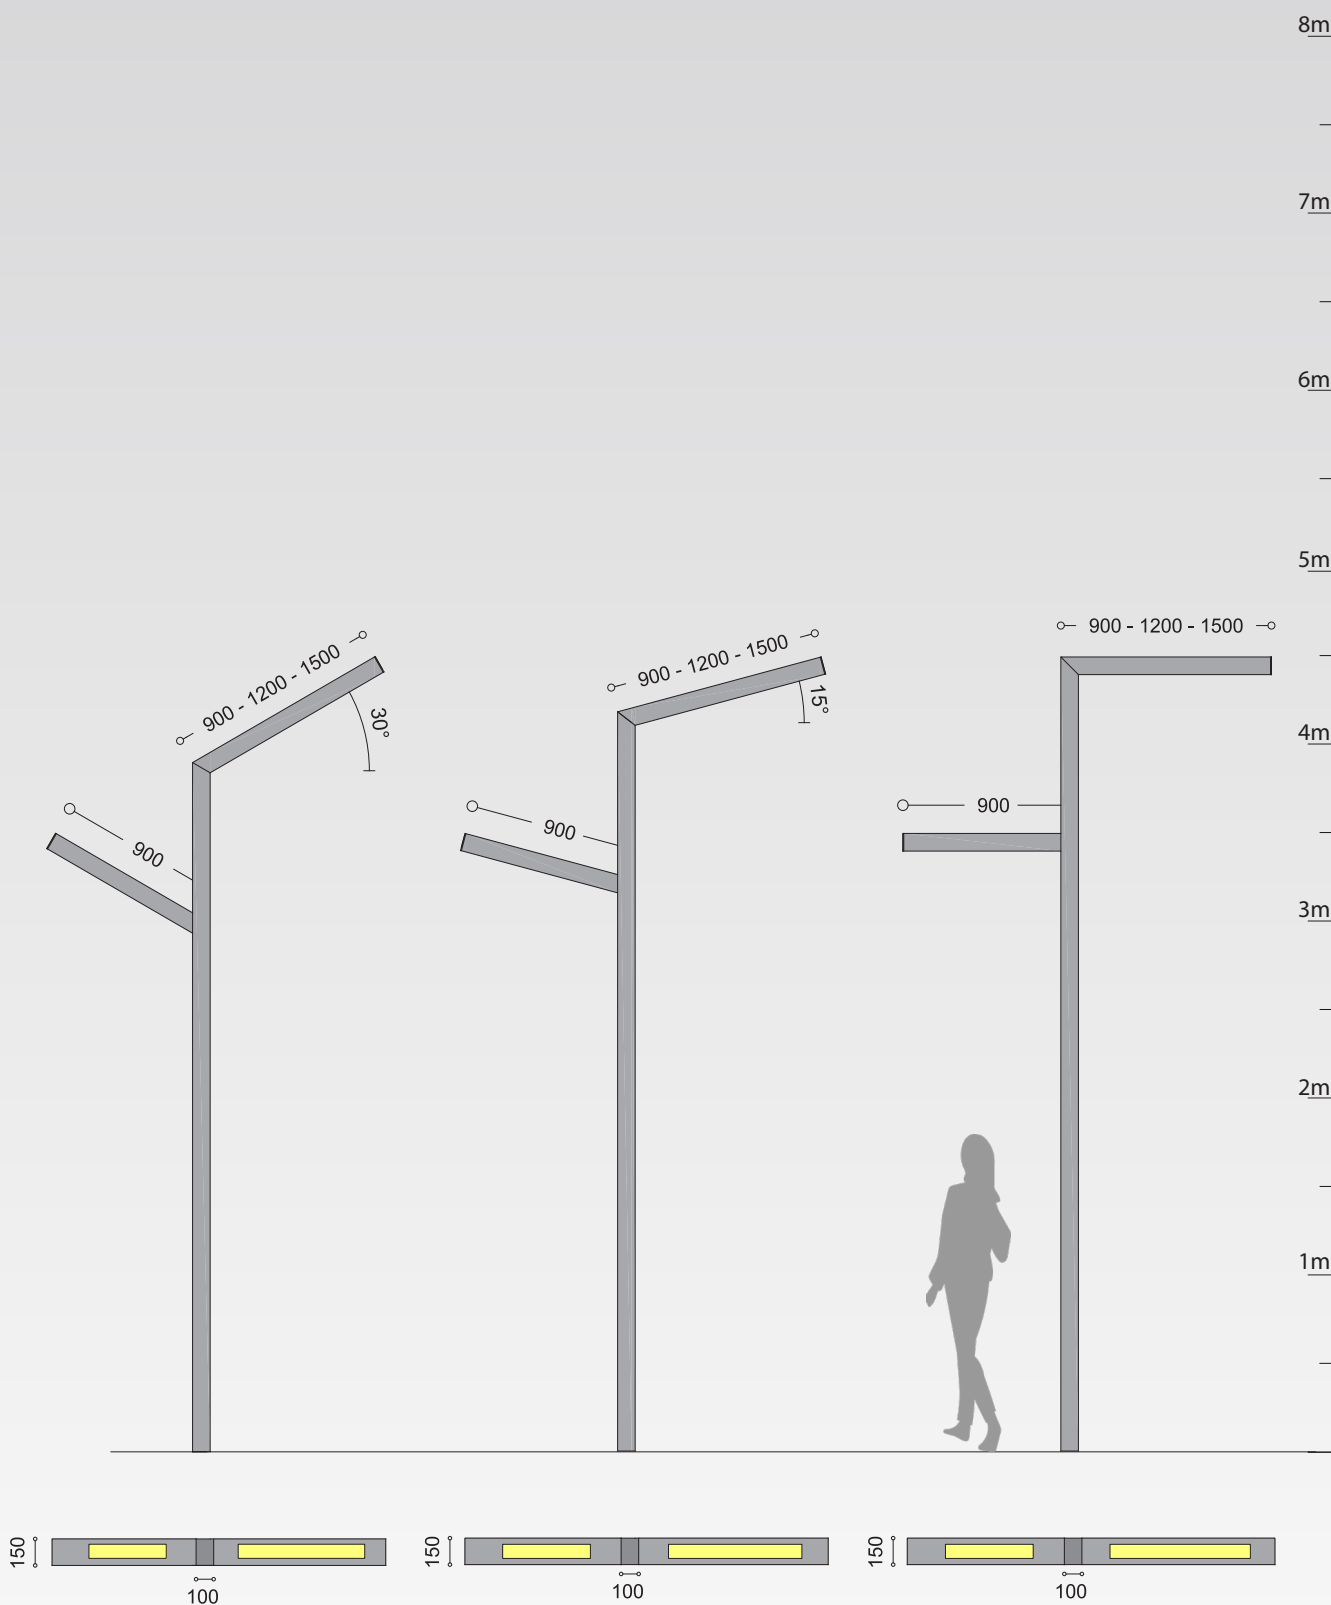


Biagio 100150 4500 D30


Biagio 100150 4500 D15

Biagio 100150 4500 D00


Biagio - 100x150mm section - 6000mm height - single arm

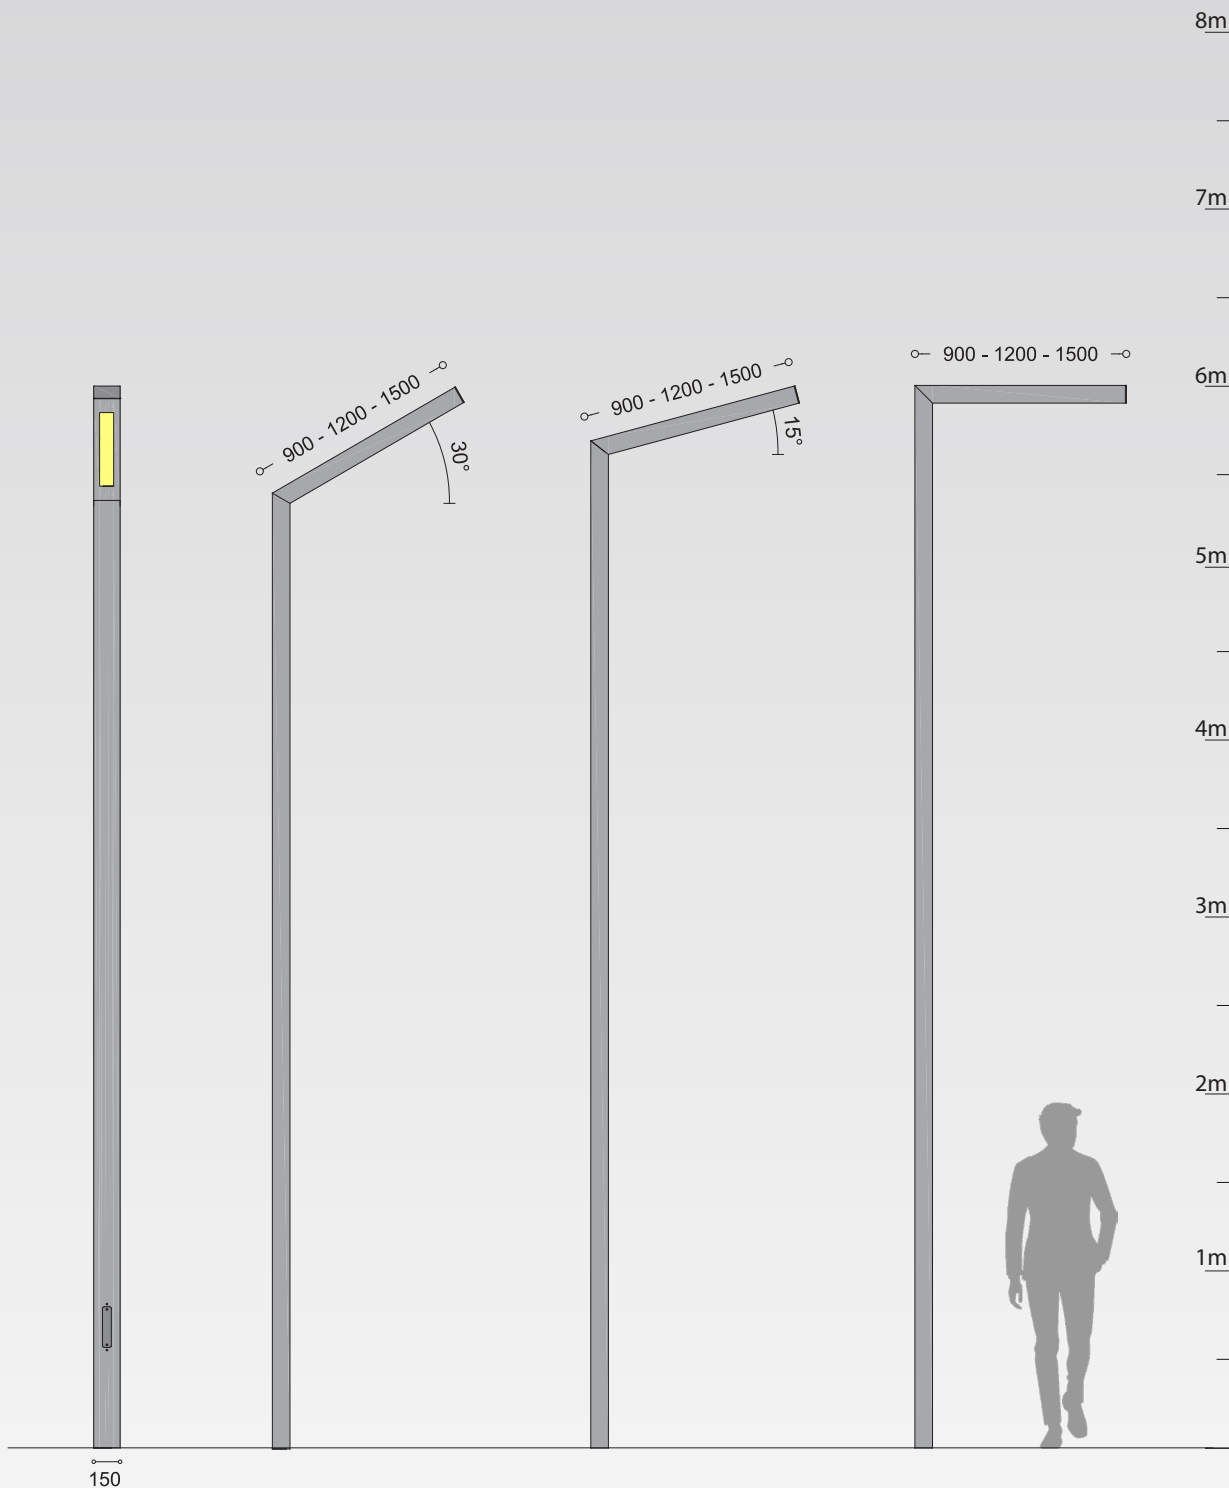

Biagio 100150 6000 S30







Biagio 100150 6000 S15



Biagio 100150 6000 S00

Biagio - 100x150mm section - 6000mm height - double arm


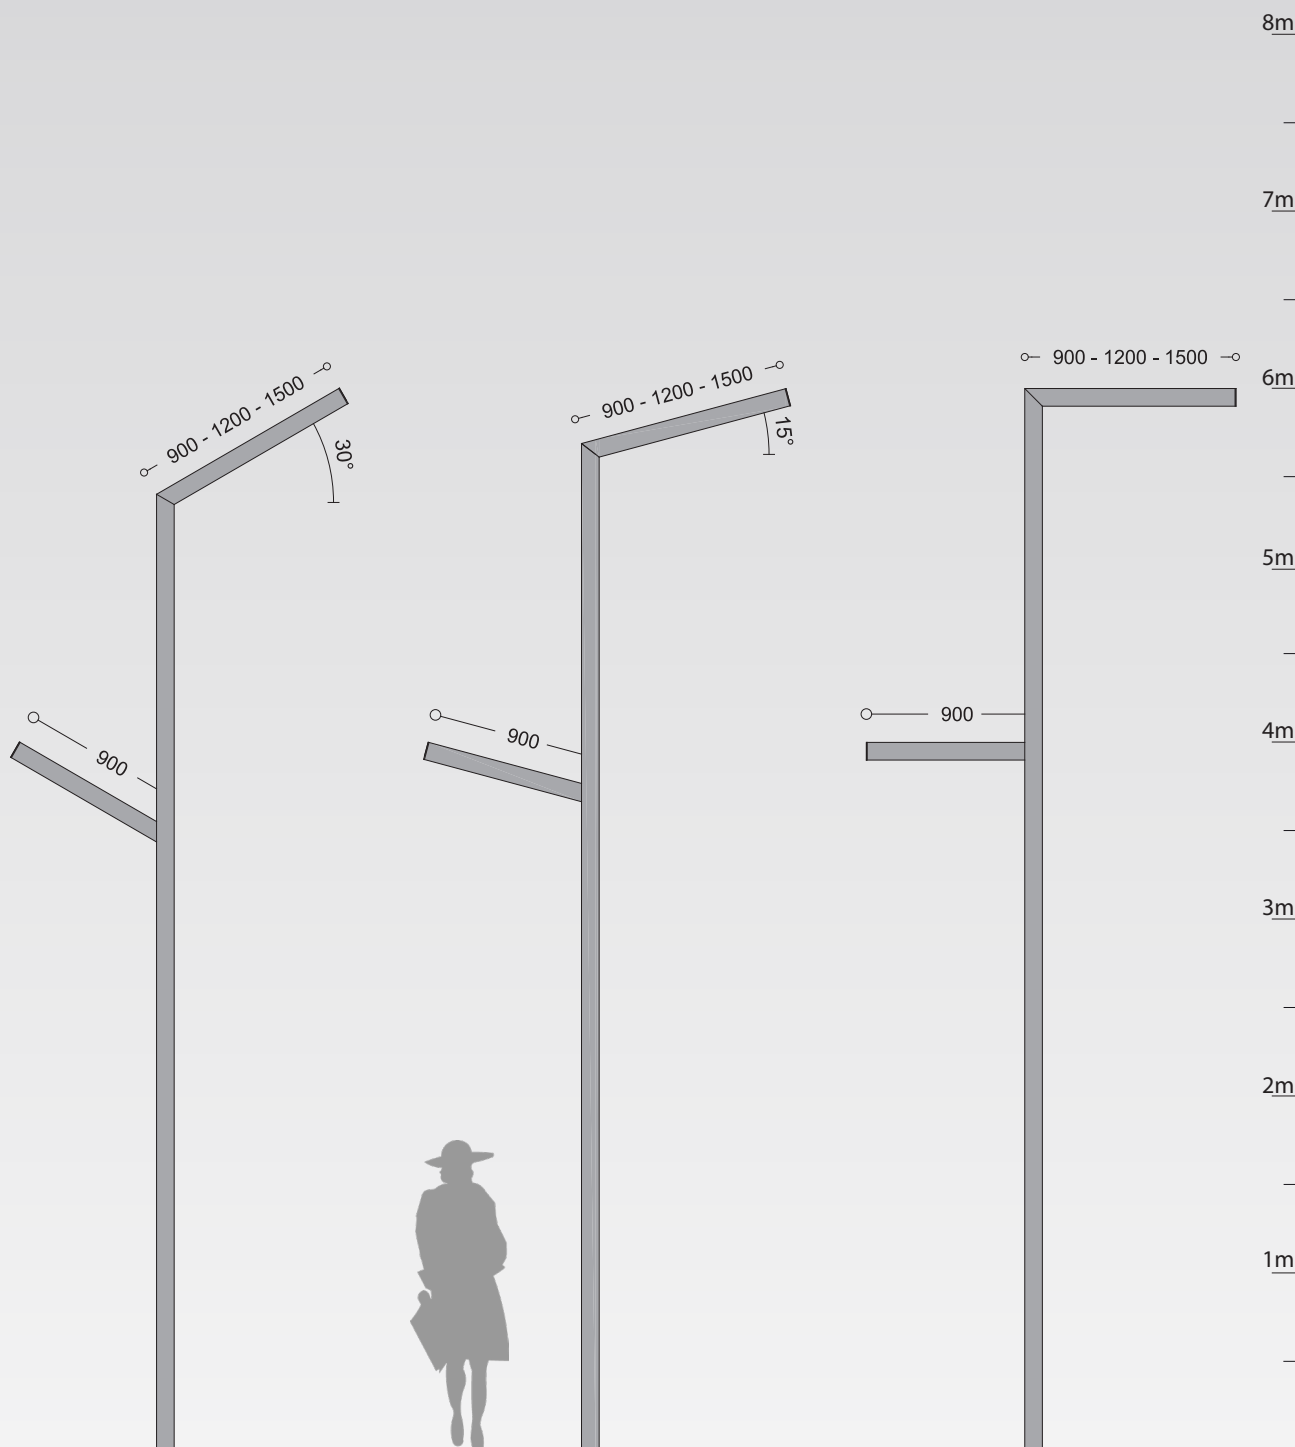


Biagio 100150 6000 D30


Biagio 100150 6000 D15

Biagio 100150 6000 D00


Biagio - 100x150mm section - 7500mm height - single arm

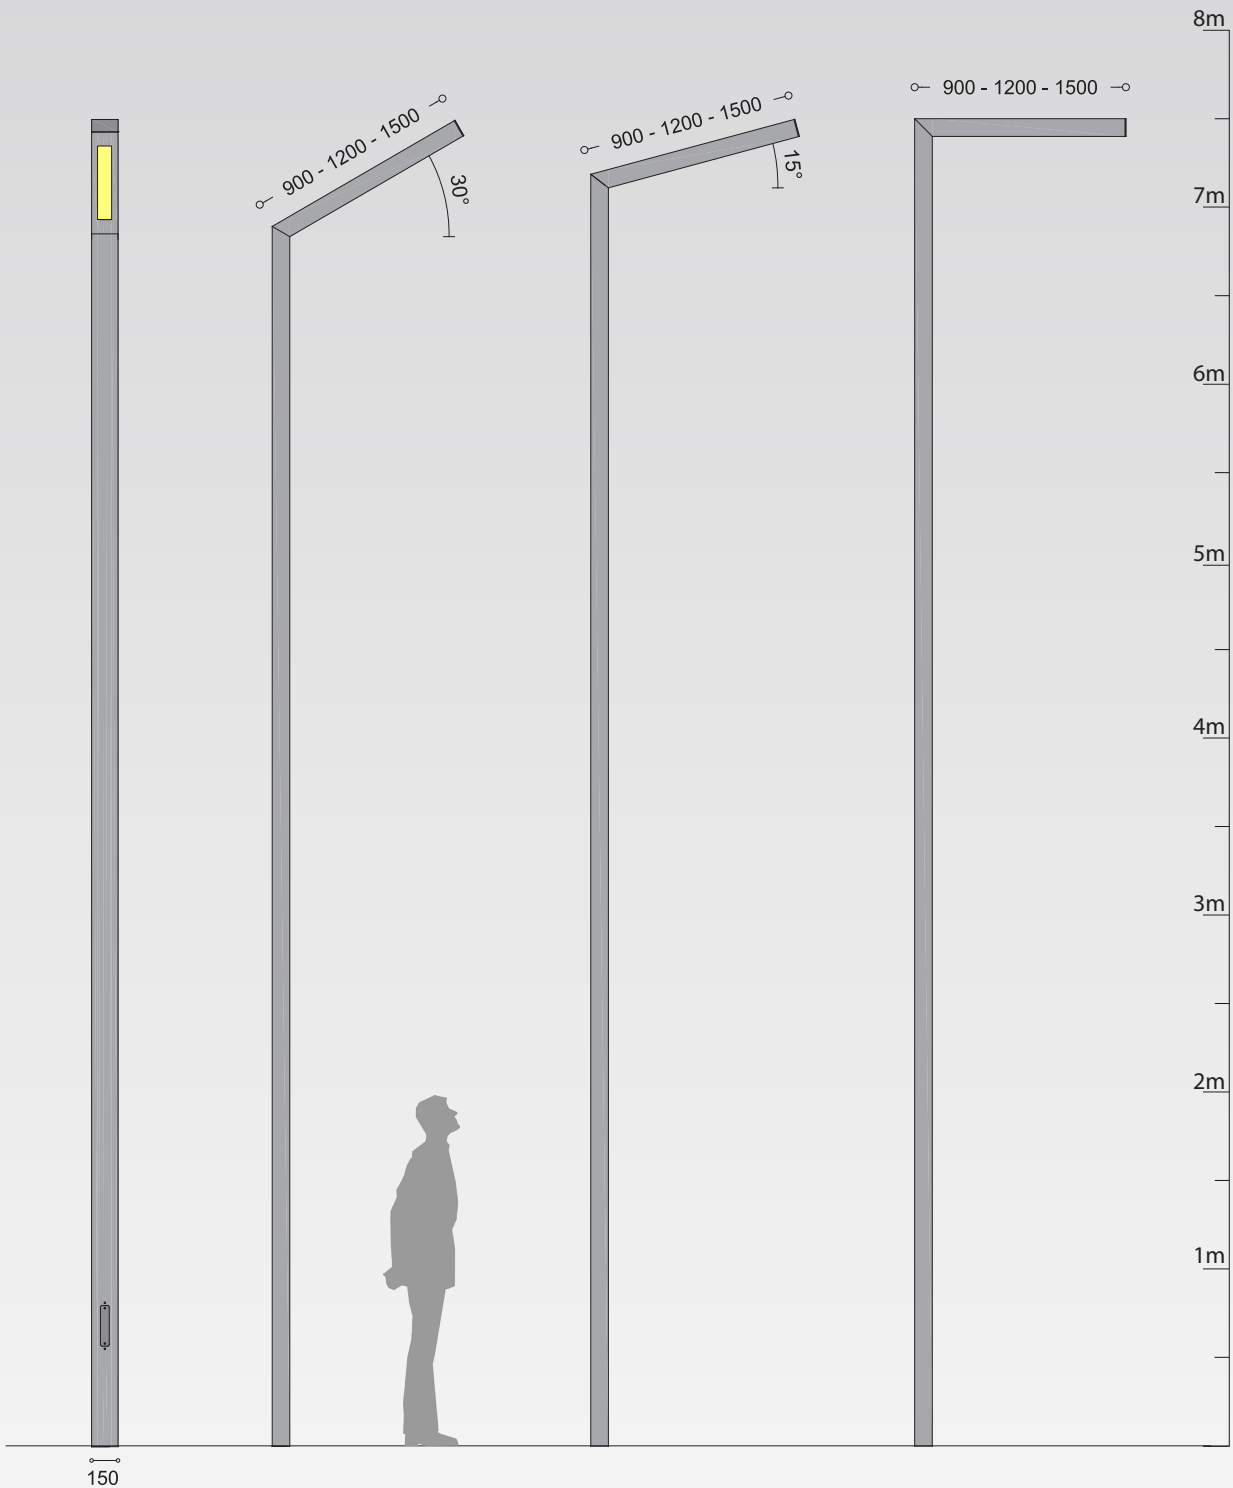

Biagio 100150 7500 S30




Biagio 100150 7500 S15



Biagio 100150 7500 S00

Biagio - 100x150mm section - 7500mm height - double arm

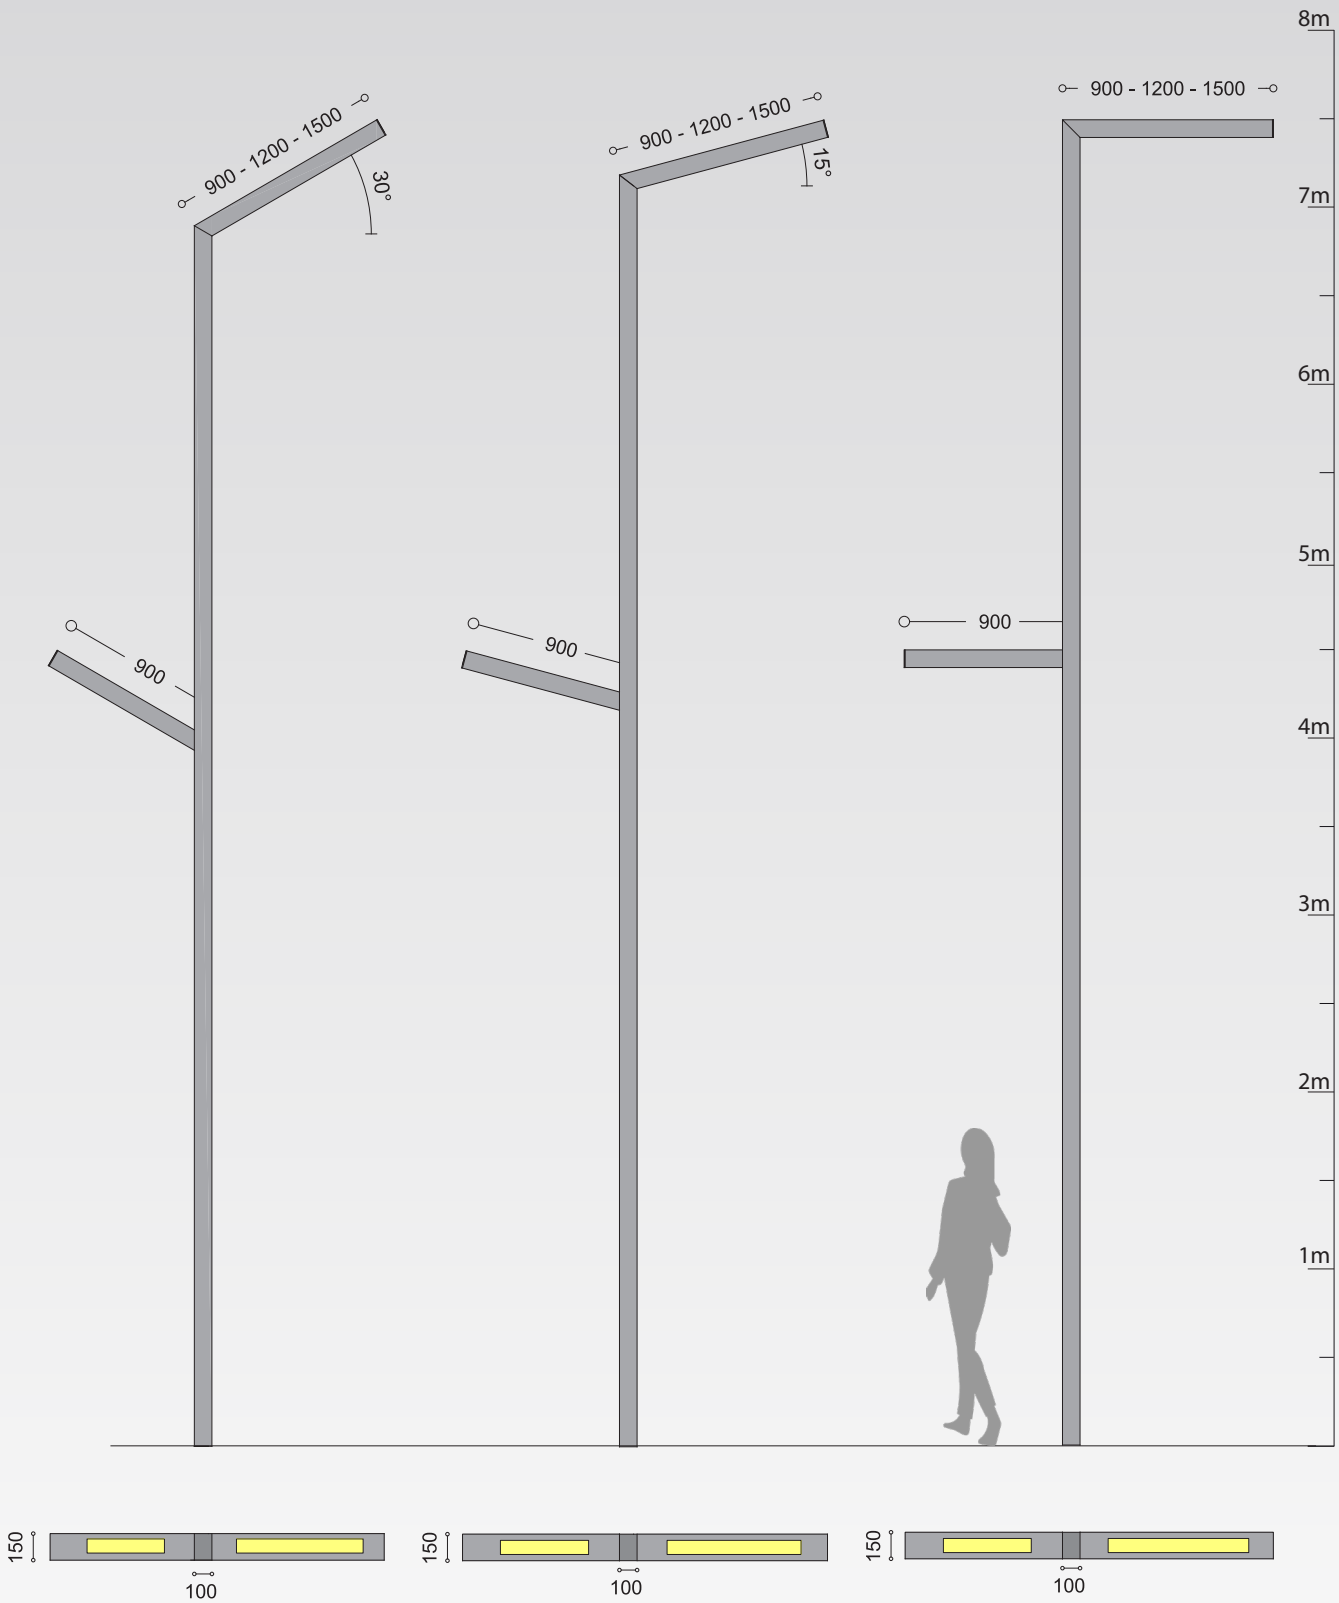


Biagio 100150 7500 D30


Biagio 100150 7500 D15

Biagio 100150 7500 D00


Biagio Wall Bracket - 80x80mm section

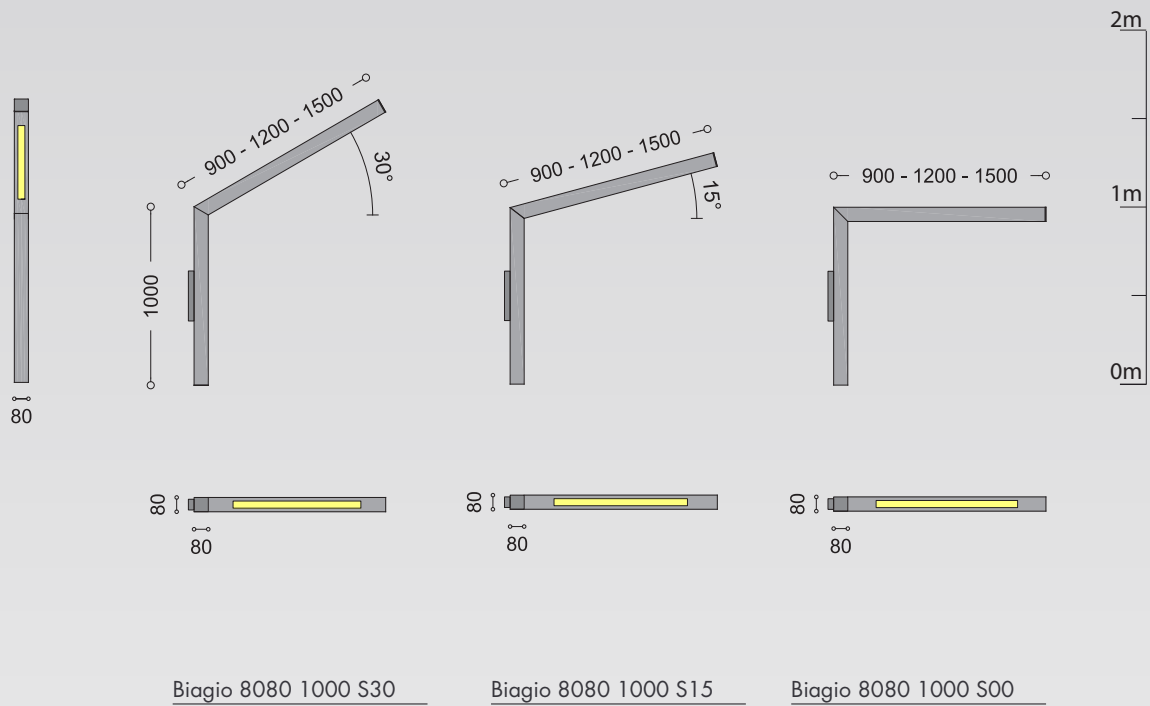

Biagio Wall Bracket - 100x100 section

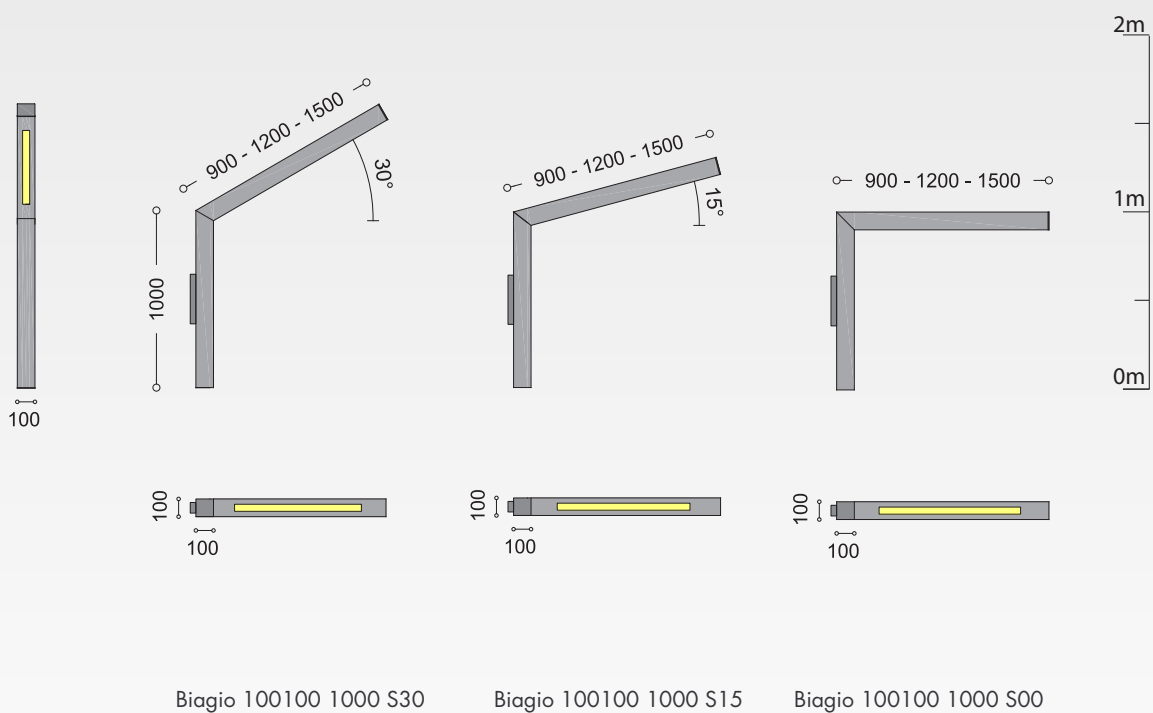

Biagio Wall Bracket - 100x150mm section

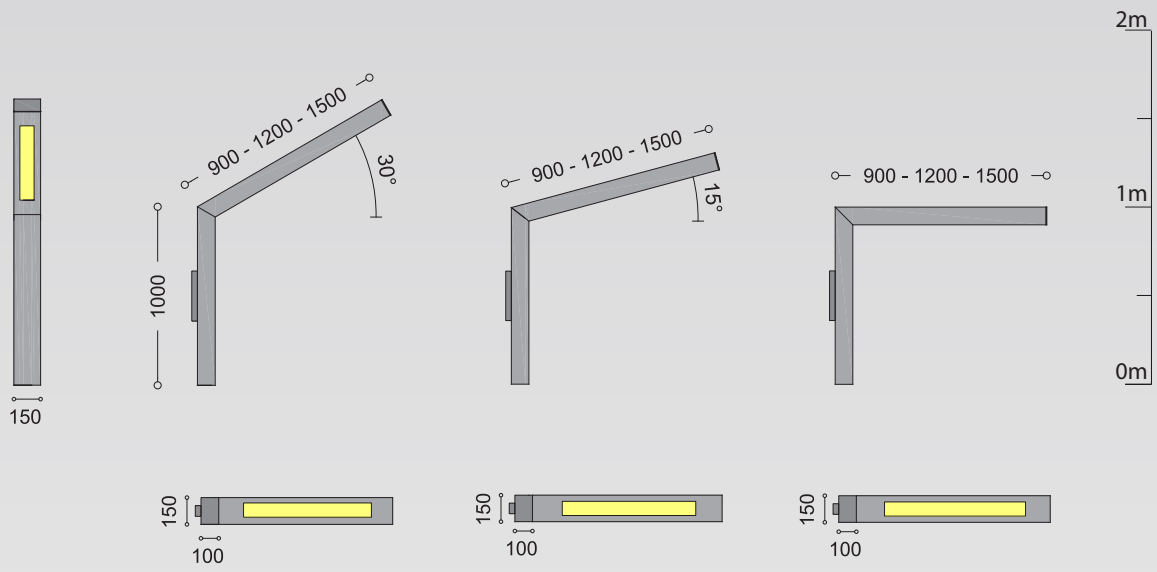


Biagio 100150 1000 S30

Biagio 100150 1000 S15


Biagio 100150 1000 S00

Biagio System - 80x80mm section - 5000+4000mm height

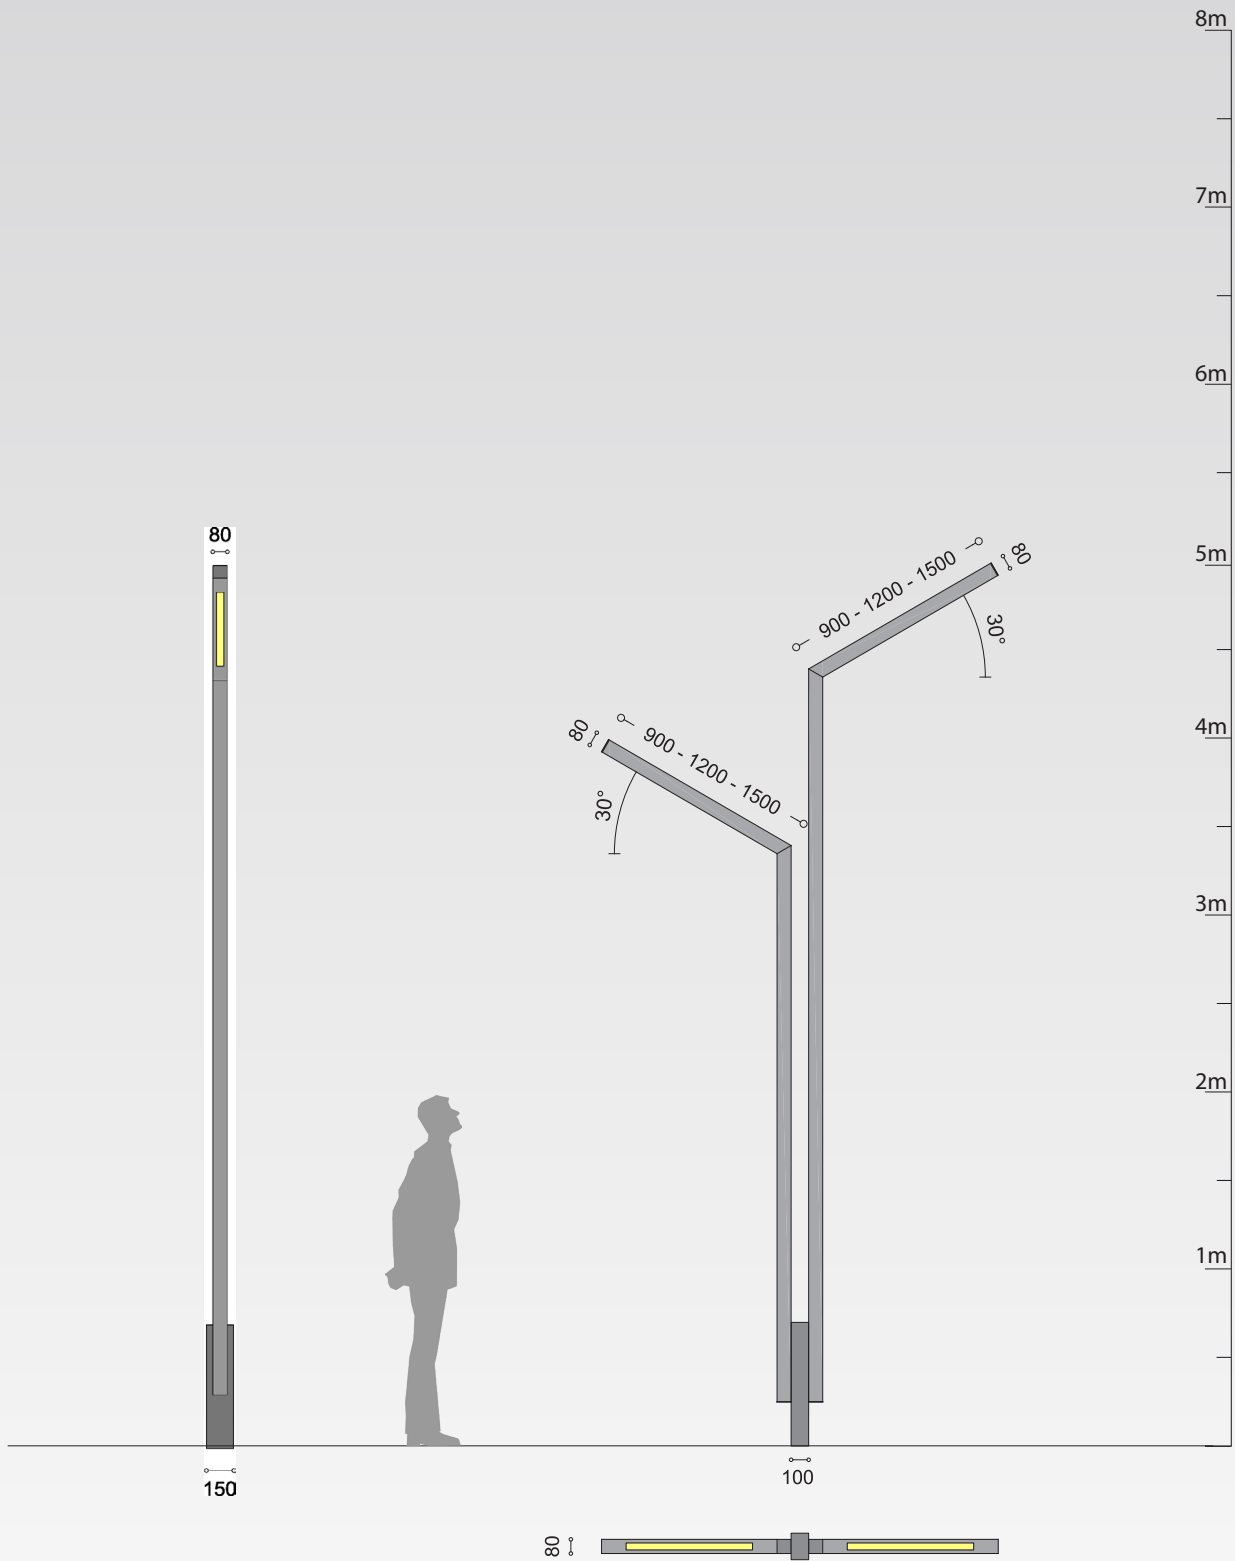

Biagio S 8080 4/5000 D30

Biagio System - 80x80mm section - 6000+5000mm height

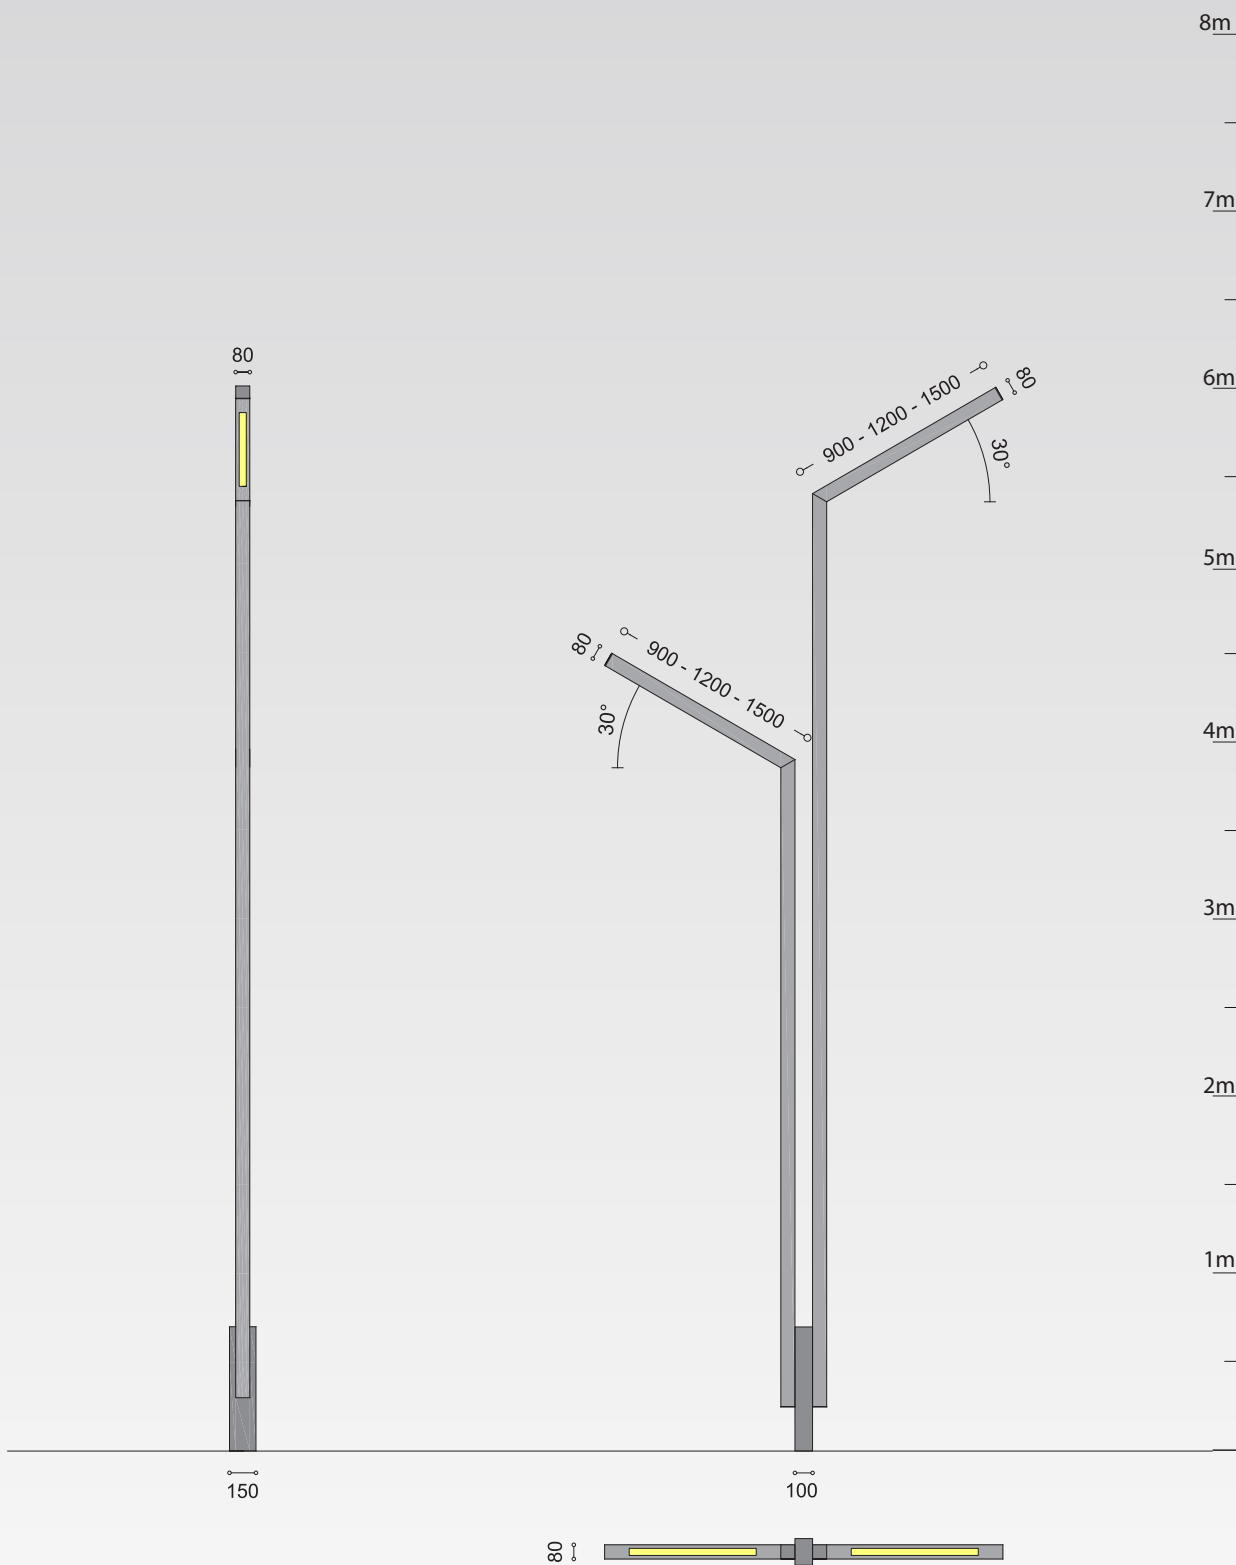

Biagio S 8080 5/6000 D30



Ospedale Papa Giovanni XXIII, Bergamo - Italy



Università Pontificia, Naples - Italy