


Luxy Big Fix

CE IP65 CLIII 

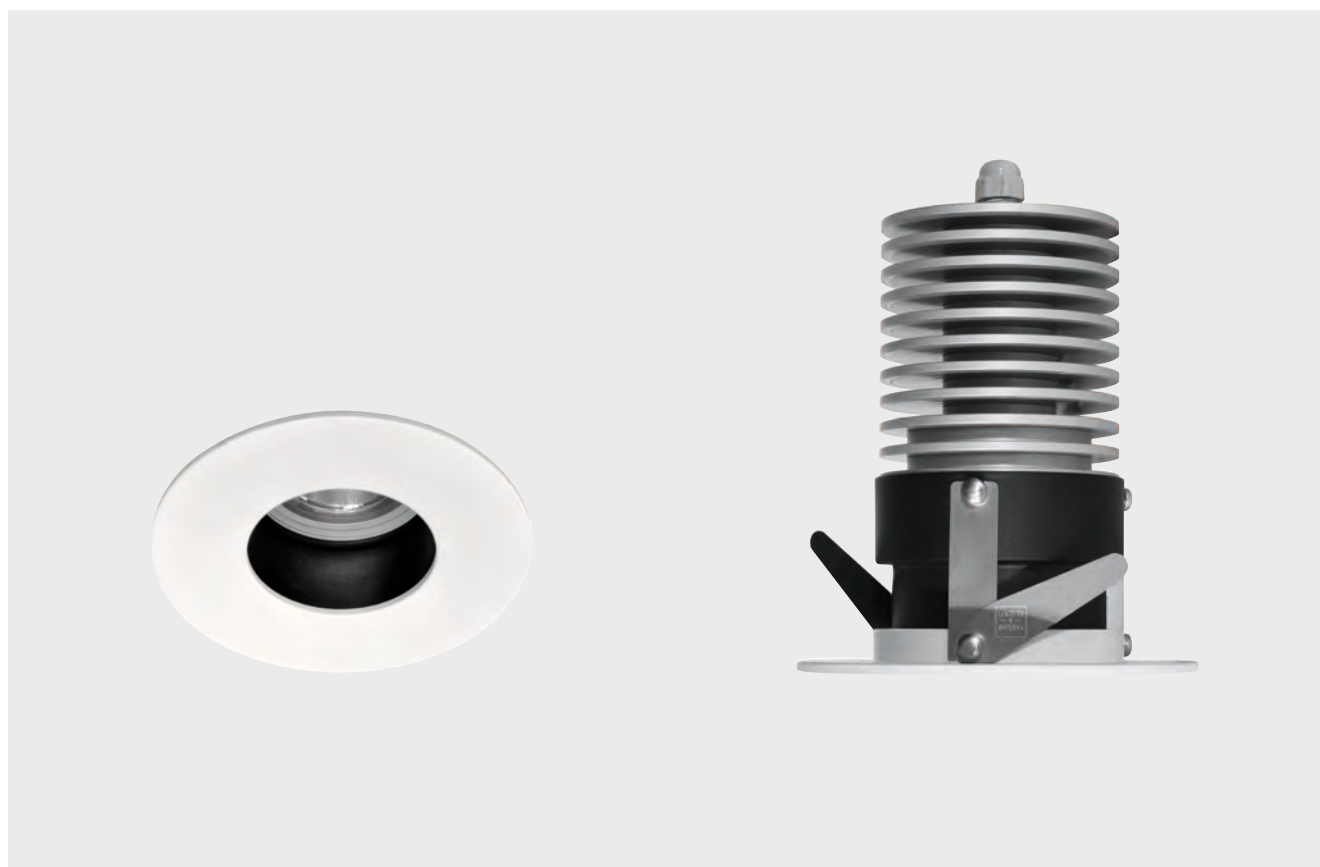

Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of die-cast aluminum, painted with polyester powder.
Harmonic stainless steel springs for installation in false ceiling.
High quality COB LED.


Electrical features

Remote power supply not included.
Class III device.

Source type	COB LED
Luminaire wattage	16.7W - 24W
Colour temperature	2700K - 3000K - 4000K
CRI	80 - on request 90
Beam	25° - 34° - 46° - 75°
Driver	Remote
Input current	Max 700 mA
Protection class	CLIII
IP rating	IP65
Weight	1 kg
Dimensions	Ø 128 x h 162

Luxy Big Fix 16.7W

CE IP65 CLIII

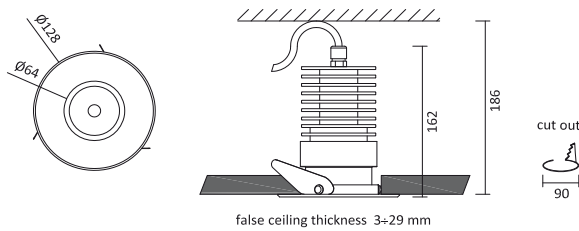

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYBF41Y	16.7	25°	2115	2700	80
ALUXYBF41W	16.7	25°	2200	3000	80
ALUXYBF41N	16.7	25°	2280	4000	90
ALUXYBF42Y	16.7	34°	2090	2700	80
ALUXYBF42W	16.7	34°	2175	3000	80
ALUXYBF42N	16.7	34°	2255	4000	80
ALUXYBF43Y	16.7	46°	2115	2700	80
ALUXYBF43W	16.7	46°	2205	3000	80
ALUXYBF43N	16.7	46°	2285	4000	80
ALUXYBF44Y	16.7	75°	2140	2700	80
ALUXYBF44W	16.7	75°	2230	3000	80
ALUXYBF44N	16.7	75°	2310	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


25° 16.7W

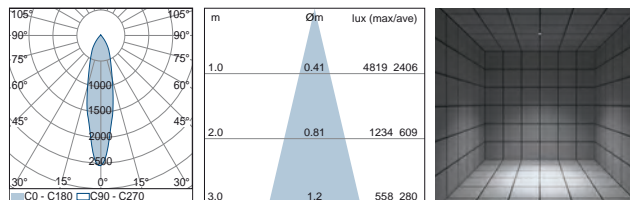


34° 16.7W

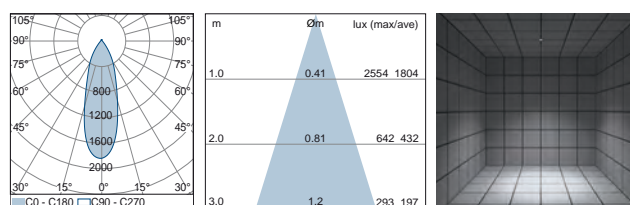

46° 16.7W

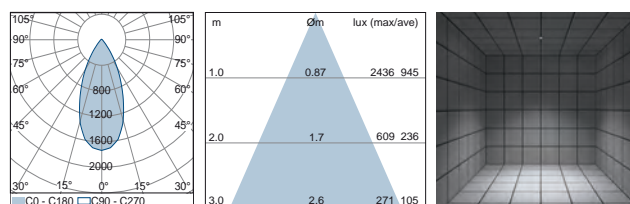


75° 16.7W

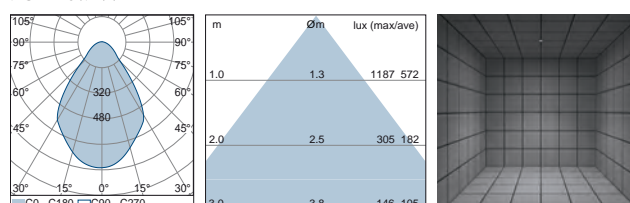

Luxy Big Fix 24W

CE IP65 CLIII 

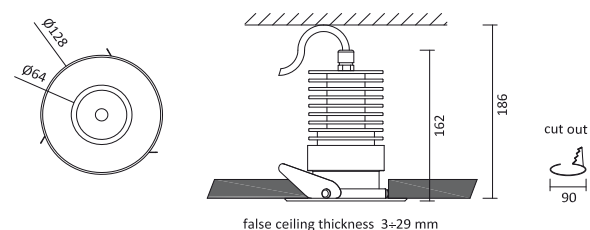

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYBF51Y	24	25°	2810	2700	80
ALUXYBF51W	24	25°	2930	3000	80
ALUXYBF51N	24	25°	3030	4000	90
ALUXYBF52Y	24	34°	2780	2700	80
ALUXYBF52W	24	34°	2895	3000	80
ALUXYBF52N	24	34°	3000	4000	80
ALUXYBF53Y	24	46°	2815	2700	80
ALUXYBF53W	24	46°	2930	3000	80
ALUXYBF53N	24	46°	3035	4000	80
ALUXYBF54Y	24	75°	2845	2700	80
ALUXYBF54W	24	75°	2965	3000	80
ALUXYBF54N	24	75°	3070	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA


25° 24W

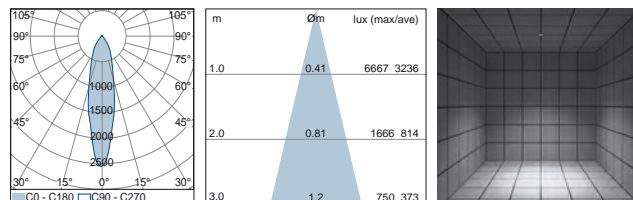

34° 24W

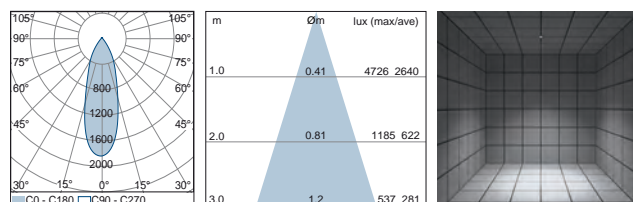

46° 24W

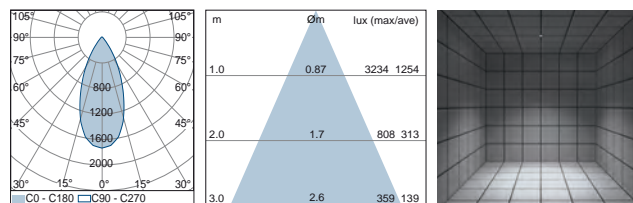

75° 24W

