


## Luxy Big Accent

CE IP65 CLIII 

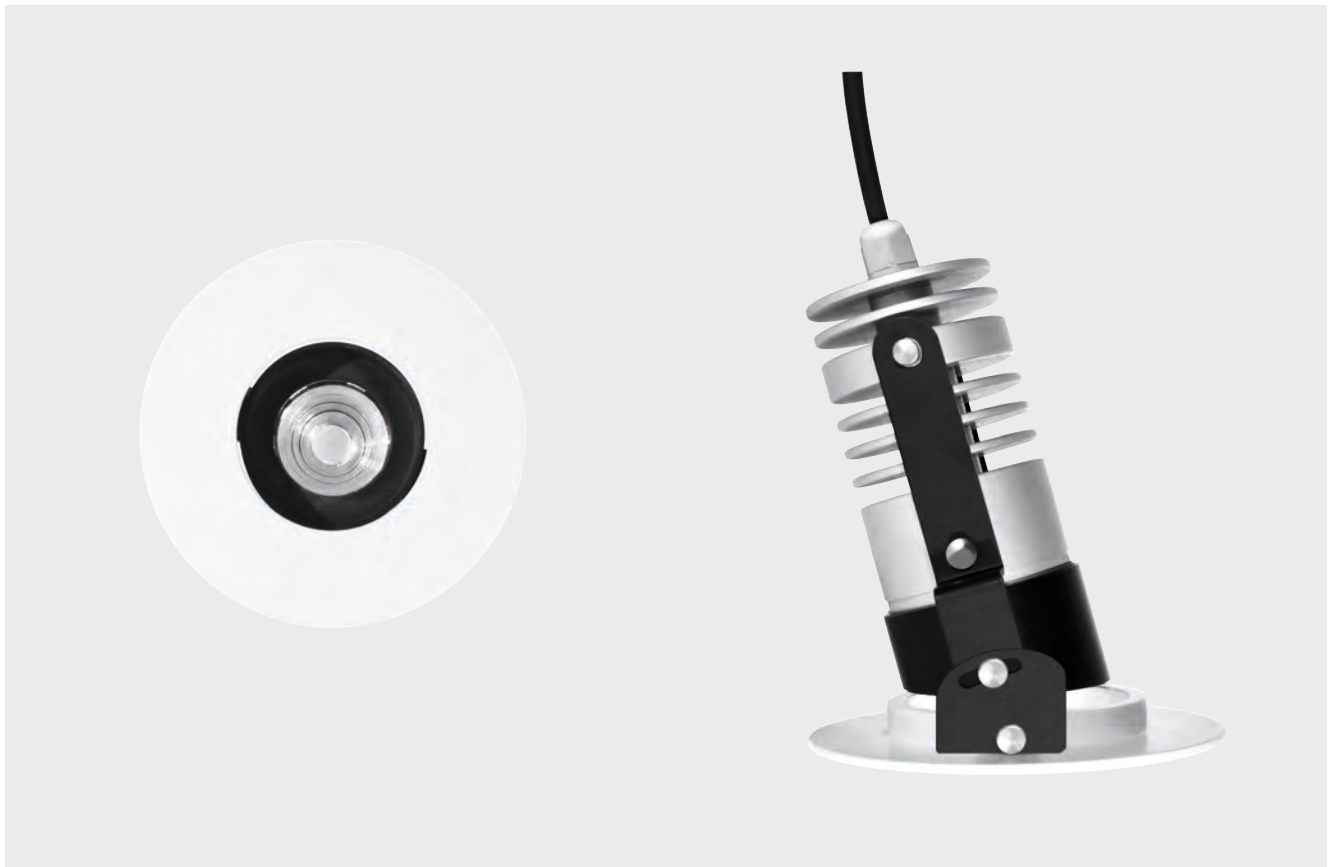

### Installation

Ceiling recessed luminaire for indoor and outdoor installation.

### Technical description

Body made of machined and anodized aluminum.  
 Front ring made of die-cast aluminum, painted with polyester powder.  
 Harmonic stainless steel springs for installation in false ceiling.  
 High quality COB LED.


### Electrical features

Remote power supply not included.  
 Class III device.

Source type	COB LED
Luminaire wattage	16.7W - 24W
Colour temperature	2700K - 3000K - 4000K
CRI	80 - on request 90
Beam	25° - 34° - 46° - 75°
Driver	Remote
Input current	Max 700 mA
Protection class	CLIII
IP rating	IP65
Weight	1 kg
Dimensions	Ø 128 x h 162

# Luxy Big Accent 16.7W

CE IP65 CLIII

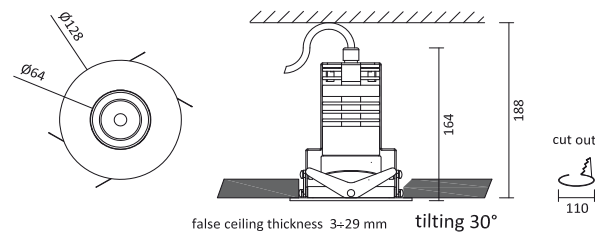

### Product codes

Code	W	Optic	Lm	K	CRI
ALUXYBA41Y	16.7	25°	2115	2700	80
ALUXYBA41W	16.7	25°	2200	3000	80
ALUXYBA41N	16.7	25°	2280	4000	90
ALUXYBA42Y	16.7	34°	2090	2700	80
ALUXYBA42W	16.7	34°	2175	3000	80
ALUXYBA42N	16.7	34°	2255	4000	80
ALUXYBA43Y	16.7	46°	2115	2700	80
ALUXYBA43W	16.7	46°	2205	3000	80
ALUXYBA43N	16.7	46°	2285	4000	80
ALUXYBA44Y	16.7	75°	2140	2700	80
ALUXYBA44W	16.7	75°	2230	3000	80
ALUXYBA44N	16.7	75°	2310	4000	80


### + Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


### + Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


### 25° 16.7W

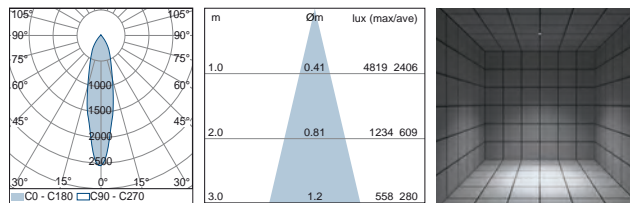


### 34° 16.7W

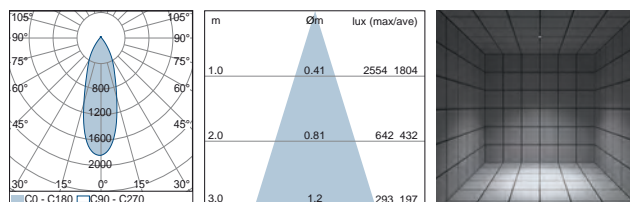

### 46° 16.7W

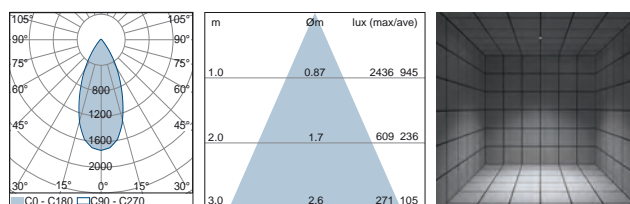


### 75° 16.7W

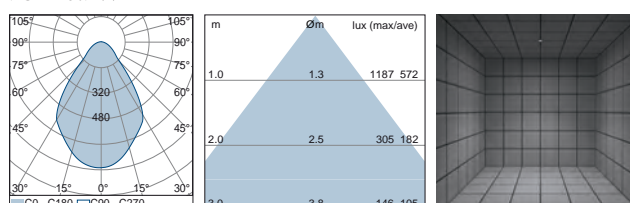

# Luxy Big Accent 24W

CE IP65 CLIII

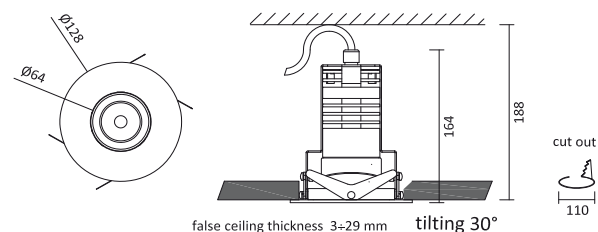

### Product codes

Code	W	Optic	Lm	K	CRI
ALUXYBA51Y	24	25°	2810	2700	80
ALUXYBA51W	24	25°	2930	3000	80
ALUXYBA51N	24	25°	3030	4000	90
ALUXYBA52Y	24	34°	2780	2700	80
ALUXYBA52W	24	34°	2895	3000	80
ALUXYBA52N	24	34°	3000	4000	80
ALUXYBA53Y	24	46°	2815	2700	80
ALUXYBA53W	24	46°	2930	3000	80
ALUXYBA53N	24	46°	3035	4000	80
ALUXYBA54Y	24	75°	2845	2700	80
ALUXYBA54W	24	75°	2965	3000	80
ALUXYBA54N	24	75°	3070	4000	80


### + Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


### + Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA


### 25° 24W

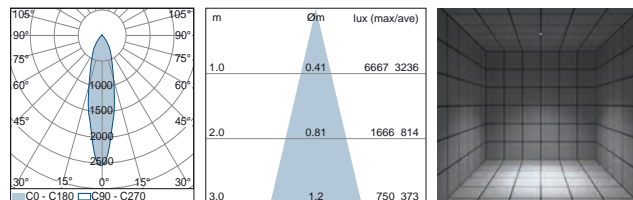

### 34° 24W

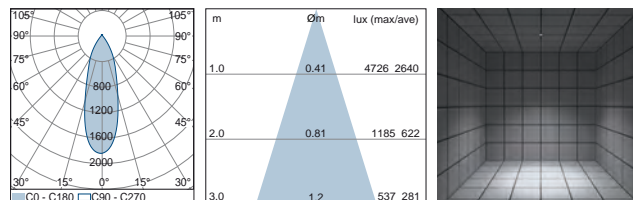

### 46° 24W

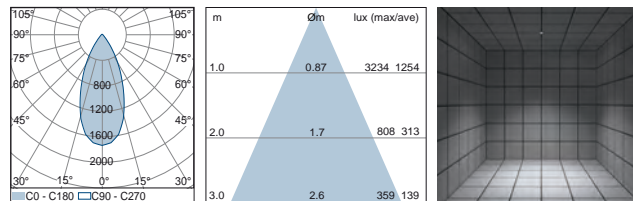

### 75° 24W

