

PL25

CE IP67 CLIII 



Installation

Recessed walkover luminaire for indoor and outdoor installation. Thanks to a wide range of accessories PL25 can be recessed into ceiling, wall and ground.

Technical description

Body made of machined and anodized aluminum.
 Front ring available in:
 - machined aluminum natural or black anodized or painted with polyester powder with standard or customized colours;
 - polished or satin stainless steel AISI 316;
 - natural or antique finish brass.
 Harmonic stainless steel springs for installation in false ceiling and plasterboard wall.
 Anti-aging silicone gasket.

Electrical and optical features

High quality power LED.
 PMMA TIR lens.
 Remote power supply not included.

Source type	Power LED
Luminaire wattage	1W
Colour temperature	2700K - 3000K - 4000K
CRI	>80 - on request >90
Beam angle	Diffuse
Driver	Remote
Input current	Max 350 mA
Protection class	CLIII
IP rating	IP67
Weight	0.2 kg
Dimensions	Ø 25 x h 50



Wiring

Luminaire supplied with 40 cm 2X0,5mmq outdoor cable with anticondenstation system on cable.



APL025F01 - Standard housing
 Straight housing made of PVC.




APL025F02 - Draining housing
 IP40 housing made of PVC.




APL025F04 - Spring
 Harmonic stainless steel spring for installation in false ceiling and plasterboard wall.

PL25 1W

CE IP67 CLIII F

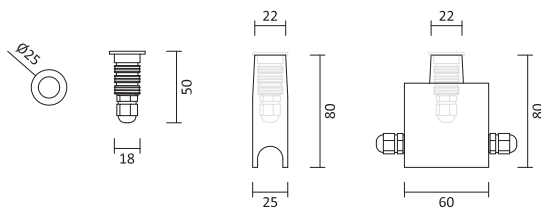

120° 1W

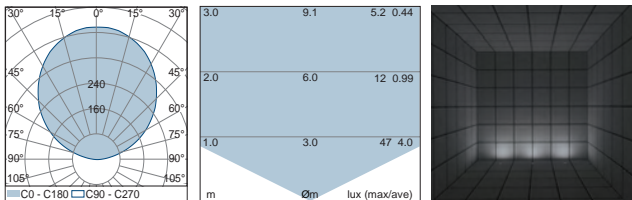

Product codes

Code	W	Optics	Lm	K	CRI
APL025F17Y	1	Diffuse	130	2700	80
APL025F17W	1	Diffuse	135	3000	80
APL025F17N	1	Diffuse	135	4000	80

+ Finishing codes

Code	Description
.NA	Natural anodized aluminum
.BA	Black anodized aluminum
.PP	Custom colour powder painter
.PI	Polished stainless steel
.SI	Satin stainless steel
.AB	Antique brass
.NB	Natural brass

+ Fixing Accesories

Code	Description
.FSPR	False ceiling and plasterboard wall installation
.FOR	Inground housing installation

+ Power supply codes

Code	Power supply type
.ST	Standard ON/OFF
.DI	DIM 1-10
.DA	DIM DALI