

Luxy Small Adjustable

CE IP65 CLIII 



Installation

Ceiling recessed luminaire for indoor and outdoor installation.

Technical description

Body made of machined and anodized aluminum.
Front ring made of die-cast aluminum, painted with polyester powder.
Harmonic stainless steel springs for installation in false ceiling.
High quality power LED.



Electrical features

Remote power supply not included.
Class III device.

Source type	High power LED
Luminaire wattage	5.5W - 7.8W - 12W
Colour temperature	2700K - 3000K - 4000K
CRI	80 - on request 90
Beam	21° - 26° - 45° - 65°
Driver	Remote
Input current	Max 1050 mA
Protection class	CLIII
IP rating	IP65
Weight	0.3 kg
Dimensions	Ø 85 x h 110

Luxy Small Adjustable 5,5W

CE IP65 CLIII 

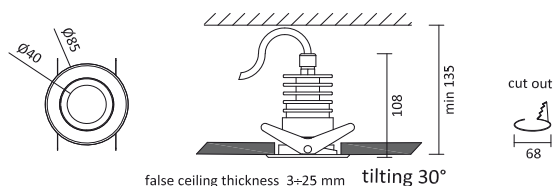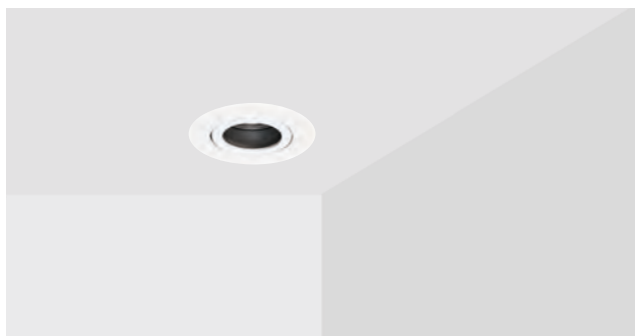

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYSA11Y	5.5	21°	535	2700	80
ALUXYSA11W	5.5	21°	570	3000	80
ALUXYSA11N	5.5	21°	605	4000	90
ALUXYSA12Y	5.5	26°	530	2700	80
ALUXYSA12W	5.5	26°	565	3000	80
ALUXYSA12N	5.5	26°	600	4000	90
ALUXYSA13Y	5.5	45°	470	2700	80
ALUXYSA13W	5.5	45°	500	3000	80
ALUXYSA13N	5.5	45°	535	4000	90
ALUXYSA14Y	5.5	65°	465	2700	80
ALUXYSA14W	5.5	65°	495	3000	80
ALUXYSA14N	5.5	65°	525	4000	90


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0500	Standard - 500 mA
DI0500	DIM1-10 - 500 mA
DA0500	DIM DALI - 500 mA


21° 5.5W

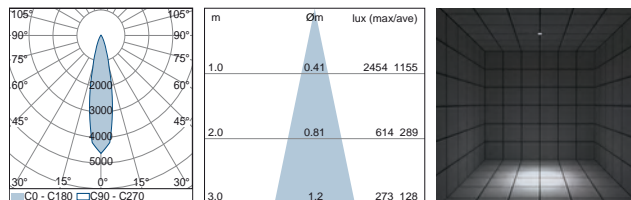


26° 5.5W

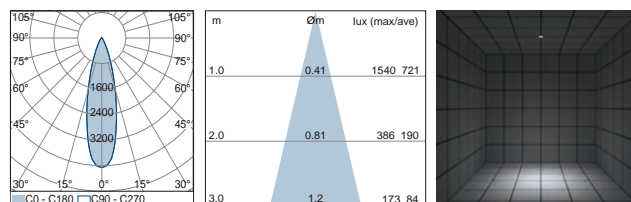

45° 5.5W

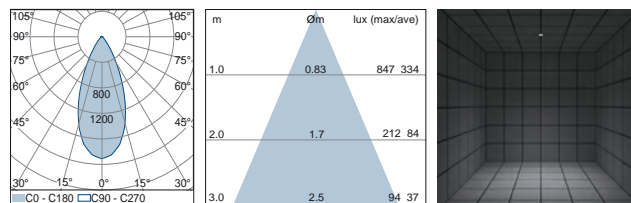


65° 5.5W

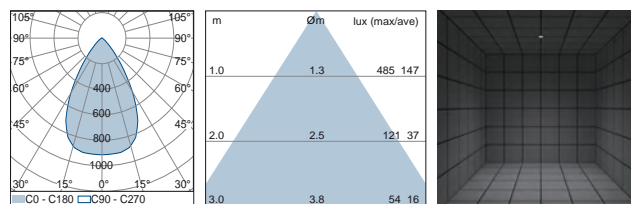

Luxy Small Adjustable 7.8W

CE IP65 CLIII

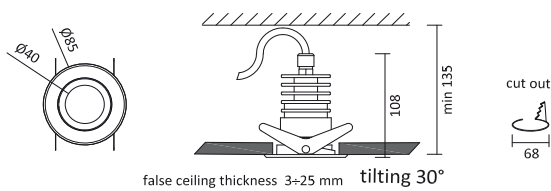

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYSA21Y	7.8	21°	715	2700	80
ALUXYSA21W	7.8	21°	760	3000	80
ALUXYSA21N	7.8	21°	805	4000	90
ALUXYSA22Y	7.8	26°	705	2700	80
ALUXYSA22W	7.8	26°	750	3000	80
ALUXYSA22N	7.8	26°	800	4000	90
ALUXYSA23Y	7.8	45°	630	2700	80
ALUXYSA23W	7.8	45°	665	3000	80
ALUXYSA23N	7.8	45°	710	4000	90
ALUXYSA24Y	7.8	65°	620	2700	80
ALUXYSA24W	7.8	65°	660	3000	80
ALUXYSA24N	7.8	65°	705	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST0700	Standard - 700 mA
DI0700	DIM1-10 - 700 mA
DA0700	DIM DALI - 700 mA


21° 7.8W

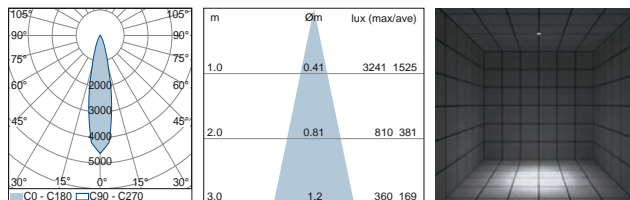


26° 7.8W

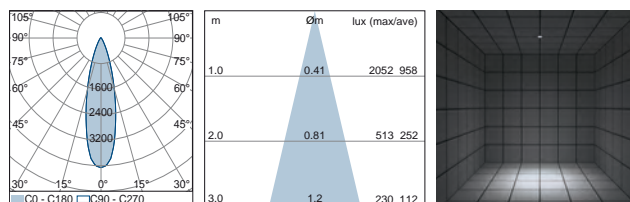

45° 7.8W


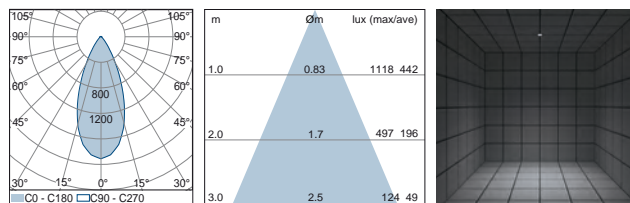


65° 7.8W

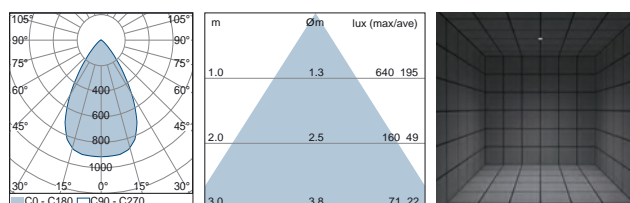

Luxy Small Adjustable 12W

CE IP65 CLIII 

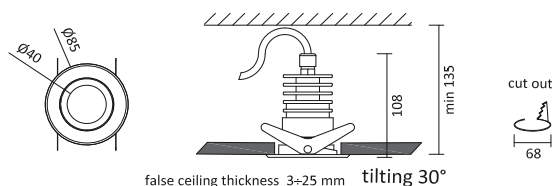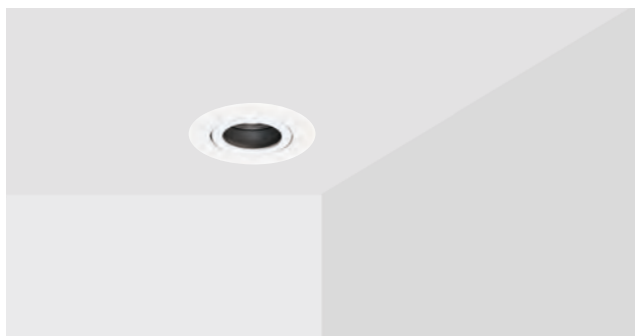

Product codes

Code	W	Optic	Lm	K	CRI
ALUXYSA31Y	12	21°	985	2700	80
ALUXYSA31W	12	21°	1045	3000	80
ALUXYSA31N	12	21°	1115	4000	80
ALUXYSA32Y	12	26°	975	2700	80
ALUXYSA32W	12	26°	1035	3000	80
ALUXYSA32N	12	26°	1100	4000	80
ALUXYSA33Y	12	45°	865	2700	80
ALUXYSA33W	12	45°	920	3000	80
ALUXYSA33N	12	45°	980	4000	80
ALUXYSA34Y	12	65°	855	2700	80
ALUXYSA34W	12	65°	910	3000	80
ALUXYSA34N	12	65°	970	4000	80


+ Finishing codes

Code	Front ring colour	Cone colour
WB	White	Black
WW	White	White
WG	White	Gold
BB	Black	Black
BW	Black	White
BG	Black	Gold


+ Power supply codes

Code	Power supply type
ST01050	Standard - 1050 mA
DIO1050	DIM1-10 - 1050 mA
DA01050	DIM DALI - 1050 mA


21° 12W

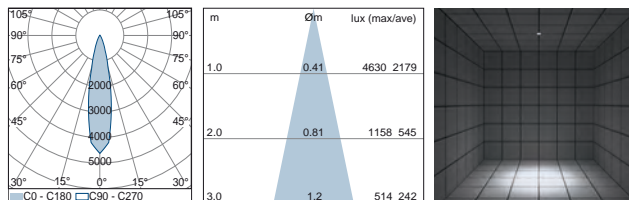

26° 12W

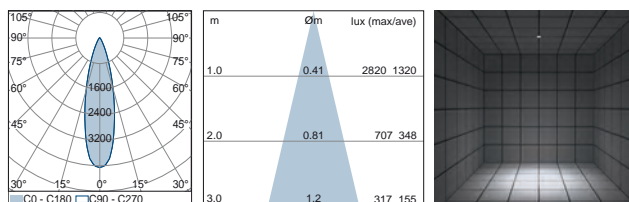

45° 12W

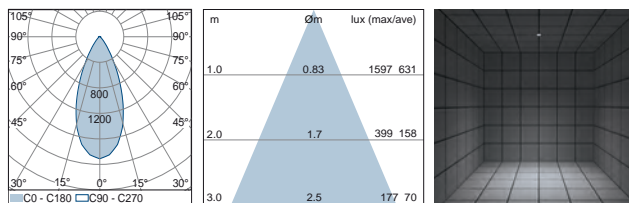

65° 12W

